



## HD 6/13 CX Plus

Compact, high performance pressure washer with unique stand-up or lay-flat operating position, large carry handle and built-in hose reel.



### 1 Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

- At last – work without getting tired: the EASY!Force high-pressure gun.
- EASY!Lock quick-release locks: durable and robust. And five times faster than screws.

### 2 Mobility

- Integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.

### 3 Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on in horizontal operation. In this way, the machine offers maximum stability.

### 4 Quality

- The automatic pressure relief protects the components and extends the service life.
- High-quality brass cylinder head.

## HD 6/13 CX Plus

- Automatic pressure relief
- For horizontal and vertical operation
- Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

### Technical data

|                             |             |                 |
|-----------------------------|-------------|-----------------|
| Order Number                |             | 1.520-955.0     |
| EAN code                    |             | 4054278164939   |
| Current type                | Ph / V / Hz | 1 / 230 / 50    |
| Flow rate                   | l/h         | 590             |
| Operating pressure          | bar / MPa   | 130 / 13        |
| Max. pressure               | bar / MPa   | 190 / 19        |
| Max. water feed temperature | °C          | bis zu 60       |
| Power rating                | kW          | 2,9             |
| Weight                      | kg          | 28,3            |
| Dimensions (L x W x H)      | mm          | 380 x 370 x 930 |

### Equipment

|                                  |    |                    |
|----------------------------------|----|--------------------|
| Trigger gun                      |    | EASY!Force         |
| High-pressure hose               | m  | 15 / ID 6, 250 bar |
| Spray lance                      | mm | 840                |
| Triple nozzle (0°/25°/40°)       |    | Manual             |
| Dirt Blaster spray lance         | ■  |                    |
| Integral high-pressure hose reel | ■  |                    |
| ANTI!Twist                       | -  |                    |
| Pressure switch control          | ■  |                    |
| Servo Control                    | -  |                    |

■ Included in delivery.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**




|                                                                            |    | Order Number | ID    | Max. working pressure | Length | Price | Description                                                                                                                                                                     |   |
|----------------------------------------------------------------------------|----|--------------|-------|-----------------------|--------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <b>Standard with unions on both sides</b>                                  |    |              |       |                       |        |       |                                                                                                                                                                                 |   |
| High-pressure hose, 10 m DN 8, AVS trigger gun connector                   | 1  | 6.110-031.0  | ID 8  | 315 bar               | 10 m   |       | 10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.              | ▲ |
| High-pressure hose, 15 m DN 8, AVS trigger gun connector                   | 2  | 6.110-030.0  | ID 8  | 315 bar               | 15 m   |       | 15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.              | ▲ |
| High-pressure hose, 20 m DN 8, AVS trigger gun connector                   | 3  | 6.110-032.0  | ID 8  | 315 bar               | 20 m   |       | 20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.              | ▲ |
| High-pressure hose, 30 m DN 8, including rotary coupling                   | 4  | 6.110-014.0  | ID 8  | 315 bar               | 30 m   |       | With rotary coupling, 2 x M 22 x 1.5                                                                                                                                            | ▲ |
| High-pressure hose, 15 m DN 10, 220 bar, extension                         | 5  | 6.110-042.0  | ID 10 | 220 bar               | 15 m   |       | 15 m high-pressure hose M 22 x 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.                                                | ▲ |
| High-pressure hose, 20 m DN 10, 220 bar, extension                         | 6  | 6.110-043.0  | ID 10 | 220 bar               | 20 m   |       | with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar                                                                                             | ▲ |
| High-pressure hose, 25 m DN 10, extension, not rotatable                   | 7  | 6.110-044.0  | ID 10 | 220 bar               | 25 m   |       |                                                                                                                                                                                 | ▲ |
| Hose assembly premium DN10 22MPa 40m                                       | 8  | 6.110-045.0  | ID 10 | 220 bar               | 40 m   |       |                                                                                                                                                                                 | ▲ |
| Hose assembly premium DN12 21MPa 15m                                       | 9  | 6.110-059.0  | ID 12 | 210 bar               | 15 m   |       | High-pressure hose for water volumes greater than 1,800 l/h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.                                                 | ▲ |
| Hose assembly premium DN12 21MPa 40m                                       | 10 | 6.110-060.0  | ID 12 | 210 bar               | 40 m   |       |                                                                                                                                                                                 | ▲ |
| Hose assembly TR DN10 22MPa 10m                                            | 11 | 6.110-041.0  | ID 10 | 220 bar               | 10 m   |       |                                                                                                                                                                                 | ▲ |
| High-pressure hose, 10 m DN 6, AVS trigger gun connector                   | 12 | 6.110-034.0  | ID 6  | 250 bar               | 10 m   |       | 10 m high-pressure hose (M 22 x 1.5) with kink protection.                                                                                                                      | ■ |
|                                                                            | 13 | 6.110-035.0  | ID 6  | 250 bar               | 10 m   |       | With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.                                                                         | □ |
| High-pressure hose, 10 m, DN 6, 300 bar, AVS trigger gun connection        | 14 | 6.110-056.0  | ID 6  | 300 bar               | 10 m   |       | With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar                                  | □ |
| <b>Longlife 400 with unions on both sides</b>                              |    |              |       |                       |        |       |                                                                                                                                                                                 |   |
| High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling      | 15 | 6.110-023.0  | ID 8  | 400 bar               | 30 m   |       | With rotary coupling, 2 x M 22 x 1.5                                                                                                                                            | ▲ |
| High-pressure hose Longlife 400, 20 m, DN 8, extension                     | 16 | 6.110-027.0  | ID 8  | 400 bar               | 20 m   |       | with rotary coupling, 2 x M 22 x 1.5                                                                                                                                            | ▲ |
| High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling     | 17 | 6.110-029.0  | ID 8  | 400 bar               | 15 m   |       | With rotary coupling, 2 x M 22 x 1.5                                                                                                                                            | ▲ |
| High-pressure hose 1.5 m, DN 8, including connectors                       | 18 | 6.110-024.0  | ID 8  | 400 bar               | 1.5 m  |       | 1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).             | □ |
| High-pressure hose packaged                                                | 19 | 6.110-038.0  | ID 8  | 400 bar               | 10 m   |       |                                                                                                                                                                                 | □ |
| <b>Food industry version with unions on both sides</b>                     |    |              |       |                       |        |       |                                                                                                                                                                                 |   |
| High-pressure hose, 10 m ID 8, suitable for food industry, extension piece | 20 | 6.110-051.0  | ID 8  | 250 bar               | 10 m   |       | 10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve. | ▲ |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**

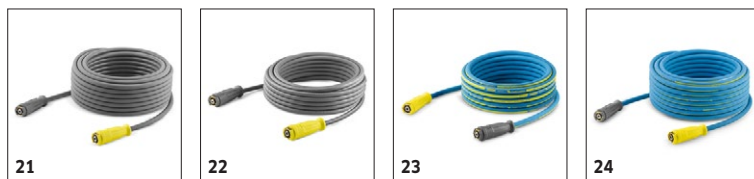

|                                                                                                 |    | Order Number | ID   | Max. working pressure | Length | Price | Description                                                                                                                                                                                    |   |
|-------------------------------------------------------------------------------------------------|----|--------------|------|-----------------------|--------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| High-pressure hose, 20 m ID 8, suitable for food industry, extension piece                      | 21 | 6.110-052.0  | ID 8 | 250 bar               | 20 m   |       | 20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar. | ▲ |
| High-pressure hose 15 m ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey | 22 | 6.110-063.0  | ID 6 | 250 bar               | 15 m   |       | 15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.                              | □ |
| <b>Longlife food industry version with unions on both sides</b>                                 |    |              |      |                       |        |       |                                                                                                                                                                                                |   |
| High pressure hose food DN 8 / 10 m                                                             | 23 | 6.110-053.0  | ID 8 | 400 bar               | 10 m   |       | Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5                                        | ▲ |
| High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection                         | 24 | 6.110-054.0  | ID 8 | 400 bar               | 20 m   |       | Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)                  | □ |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0



|                                           |   | Order Number | Flow rate |  |  |  | Price | Description                                                                                                                                                           |                          |
|-------------------------------------------|---|--------------|-----------|--|--|--|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Trigger guns</b>                       |   |              |           |  |  |  |       |                                                                                                                                                                       |                          |
| EASY!Force Advanced                       | 1 | 4.118-005.0  |           |  |  |  |       | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. | ■                        |
| <b>Quick connect</b>                      |   |              |           |  |  |  |       |                                                                                                                                                                       |                          |
| Quick-fitting pipe union coupler trapezo  | 2 | 2.115-000.0  |           |  |  |  |       |                                                                                                                                                                       | <input type="checkbox"/> |
| Quick-fitting pipe union plug nipp-le tra | 3 | 2.115-001.0  |           |  |  |  |       |                                                                                                                                                                       | <input type="checkbox"/> |

■ Included in delivery.
 ☐ Available accessories.
 ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0




|                            |   | Order Number | Max. working pressure | Nozzle size |  |  | Price | Description                                                                                                                                                                                         |   |
|----------------------------|---|--------------|-----------------------|-------------|--|--|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <b>Triple nozzles</b>      |   |              |                       |             |  |  |       |                                                                                                                                                                                                     |   |
| Triple nozzle 038          | 1 | 4.117-032.0  | 300 bar               | 38          |  |  |       | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5. | ■ |
| <b>Dirt Blaster, small</b> |   |              |                       |             |  |  |       |                                                                                                                                                                                                     |   |
|                            | 2 | 4.114-020.0  | 180 bar               | 40          |  |  |       |                                                                                                                                                                                                     | ■ |
| <b>Dirt blaster, large</b> |   |              |                       |             |  |  |       |                                                                                                                                                                                                     |   |
| Dirt blaster 04            | 3 | 4.114-041.0  | 300 bar               | 40          |  |  |       | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.           | □ |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

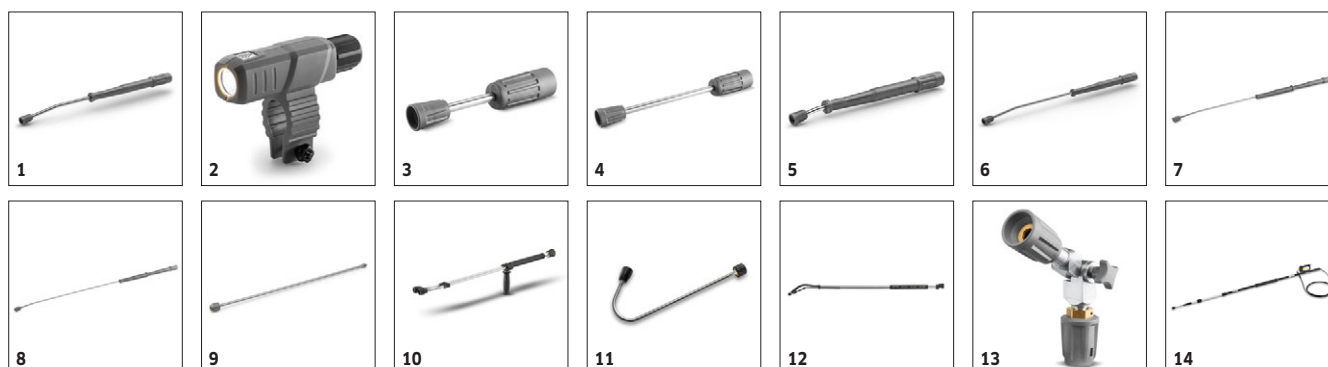**KÄRCHER**


|                                          |    | Order Number | Max. working pressure | Length  |  |  |  | Price | Description                                                                                                                                                                     |
|------------------------------------------|----|--------------|-----------------------|---------|--|--|--|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rotating spray lances</b>             |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Lance 850 mm, rotatable, ergonomic       | 1  | 4.112-006.0  | 300 bar               | 840 mm  |  |  |  |       | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. ■                                           |
| Nozzle light                             | 2  | 2.680-002.0  |                       | 125 mm  |  |  |  |       | □                                                                                                                                                                               |
| Lance 250 mm, non-rotatable              | 3  | 4.112-027.0  | 300 bar               | 250 mm  |  |  |  |       | □                                                                                                                                                                               |
| 550 mm lance, non-rotatable              | 4  | 4.112-024.0  | 300 bar               | 400 mm  |  |  |  |       | □                                                                                                                                                                               |
| Rotatable lance, 600 mm, ergonomic       | 5  | 4.112-007.0  | 300 bar               | 600 mm  |  |  |  |       | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. □                                           |
| 1050 mm lance, rotatable, ergonomic      | 6  | 4.112-000.0  | 300 bar               | 1050 mm |  |  |  |       | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. □                                          |
| Lance 1550 mm, rotatable, ergonomic      | 7  | 4.112-018.0  | 300 bar               | 1550 mm |  |  |  |       | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. □                                          |
| Lance 2050 mm, rotatable, ergonomic      | 8  | 4.112-021.0  | 300 bar               | 2050 mm |  |  |  |       | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. □                                          |
| Jet pipe extension TR 1000 mm            | 9  | 4.112-048.0  | 300 bar               | 1000 mm |  |  |  |       | □                                                                                                                                                                               |
| <b>Double lance</b>                      |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Double lance 960 mm                      | 10 | 2.112-016.0  | 310 bar               | 960 mm  |  |  |  |       | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). □                                 |
| <b>Angular spray lance</b>               |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| WC and gutter lance                      | 11 | 4.112-029.0  |                       |         |  |  |  |       | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. □                                          |
| <b>Flexible spray lance</b>              |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Flexible lance 1050 mm                   | 12 | 4.112-035.0  | 210 bar               | 1050 mm |  |  |  |       | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. □                                                        |
| Articulated joint TR 20                  | 13 | 4.112-057.0  | 300 bar               |         |  |  |  |       | □                                                                                                                                                                               |
| <b>Telescopic spray lance</b>            |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Telescopic jet pipe                      | 14 | 4.112-037.0  | 225 bar               | 5400 mm |  |  |  |       | □                                                                                                                                                                               |
| Restraint belt for telescopic jet pipe   | 15 | 6.373-987.0  |                       |         |  |  |  |       | Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible. □ |
| <b>Gutter cleaner</b>                    |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Gutter cleaning lance                    | 16 | 2.112-015.0  |                       | 960 mm  |  |  |  |       | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. □     |
| <b>Undercarriage spray lance</b>         |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Underbody lance                          | 17 | 4.112-032.0  |                       | 700 mm  |  |  |  |       | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. □                                                                 |
| <b>Additional handle</b>                 |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
|                                          | 18 | 4.321-380.0  |                       |         |  |  |  |       | □                                                                                                                                                                               |
| <b>PowerControl spray lance</b>          |    |              |                       |         |  |  |  |       |                                                                                                                                                                                 |
| Pressure regulating jet pipe packaged Po | 19 | 4.112-047.0  |                       |         |  |  |  |       | □                                                                                                                                                                               |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 6/13 CX PLUS  
1.520-955.0



|               |   | Order Number |  |  |  |  | Price | Description |                          |
|---------------|---|--------------|--|--|--|--|-------|-------------|--------------------------|
| Y distributor |   |              |  |  |  |  |       |             |                          |
| Y distributor | 1 | 4.111-024.0  |  |  |  |  |       |             | <input type="checkbox"/> |

■ Included in delivery.    □ Available accessories.    ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**


|                                                               |    | Order Number | Flow rate   | Nozzle size | Diameter | Price | Description                                                                                                                                                                              |                          |
|---------------------------------------------------------------|----|--------------|-------------|-------------|----------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Hard surface cleaner FR Classic</b>                        |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
|                                                               | 1  | 2.111-016.0  |             |             | 300 mm   |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| <b>Hard Surface Cleaner FRV 30</b>                            |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| Add-on kit rubber lip                                         | 2  | 2.642-910.0  |             |             |          |       | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.  | <input type="checkbox"/> |
| Extension hose 5 m                                            | 3  | 4.440-939.0  |             |             |          |       | 5m extension hose for FRV 30. Connection sleeve included.                                                                                                                                | <input type="checkbox"/> |
| Add-on kit hose attachment                                    | 4  | 2.642-528.0  |             |             |          |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| Add-on kit dirt trap                                          | 5  | 2.642-532.0  |             |             |          |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| FRV 30                                                        | 6  | 2.111-010.0  |             |             |          |       | Surface cleaner with integrated waste water pick-up                                                                                                                                      | <input type="checkbox"/> |
| <b>Hard surface cleaner FR 30</b>                             |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| FR 30                                                         | 7  | 2.111-011.0  |             |             | 300 mm   |       | Hard surface cleaner FR 30                                                                                                                                                               | <input type="checkbox"/> |
| <b>Hard surface cleaner FR 30 ME</b>                          |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| FR 30 ME surface cleaner                                      | 8  | 2.111-013.0  |             |             | 300 mm   |       | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. | <input type="checkbox"/> |
| <b>Machine-specific nozzle kit for FR</b>                     |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| Nozzle kit for surface cleaners (type-specific) 500 - 650 l/h | 9  | 2.640-401.0  | 500-650 l/h |             |          |       | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).                                                                                             | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FRV</b>                   |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| Nozzle kit 040 for FRV 30                                     | 10 | 2.642-431.0  |             | 40          |          |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FR Classic</b>            |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
|                                                               | 11 | 2.885-312.0  |             | 40          |          |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| <b>Hard surface cleaner FRV 30 Me</b>                         |    |              |             |             |          |       |                                                                                                                                                                                          |                          |
| Suction hose FRV 30 me                                        | 12 | 4.441-040.0  |             |             |          |       |                                                                                                                                                                                          | <input type="checkbox"/> |
| FRV 30 ME                                                     | 13 | 2.111-012.0  |             |             |          |       | Surface cleaner with integrated waste water pick-up                                                                                                                                      | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0


**KÄRCHER**


|                                                                                   |    | Order Number |  |  |  |  |  | Price | Description                                                                                                                                                                                  |                          |
|-----------------------------------------------------------------------------------|----|--------------|--|--|--|--|--|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Nozzle union</b>                                                               |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Protection part TR only for replacement                                           | 1  | 4.112-011.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| <b>Rotary coupling</b>                                                            |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Rotary coupling                                                                   | 2  | 4.111-021.0  |  |  |  |  |  |       | Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.                                                  | <input type="checkbox"/> |
| <b>Coupling</b>                                                                   |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Coupler -2xM22x1,5                                                                | 3  | 4.111-037.0  |  |  |  |  |  |       | Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.                                                                 | <input type="checkbox"/> |
| <b>Connector</b>                                                                  |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Nozzle connector/screw connector                                                  | 4  | 4.111-022.0  |  |  |  |  |  |       | Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5. | <input type="checkbox"/> |
|                                                                                   | 5  | 4.111-038.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| <b>Adapter EASY!Lock</b>                                                          |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Adapter 1 M22AG-TR22AG                                                            | 6  | 4.111-029.0  |  |  |  |  |  |       | M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.          | <input type="checkbox"/> |
| Adapter 2 M22IG-TR22AG                                                            | 7  | 4.111-030.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter 3 M22IG-TR22AG                                                            | 8  | 4.111-031.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter M22 - Swivel                                                              | 9  | 4.111-032.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter 5 TR22IG-M22AG                                                            | 10 | 4.111-033.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter 6 TR22IG-M22AG                                                            | 11 | 4.111-034.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter 7 M18IG-TR20AG                                                            | 12 | 4.111-035.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| Adapter 8 TR20IG-M18AG                                                            | 13 | 4.111-036.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| ADAPTER for replacement TR22IG-M22AG Er                                           | 14 | 4.111-046.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| <b>Machine-specific nozzle kit with order no. 3.637-170</b>                       |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Nozzle insert trapezoidal thread HD-GER.                                          | 15 | 4.769-005.0  |  |  |  |  |  |       |                                                                                                                                                                                              | <input type="checkbox"/> |
| <b>Nozzle insert with order no. 3.637-001</b>                                     |    |              |  |  |  |  |  |       |                                                                                                                                                                                              |                          |
| Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h. | 16 | 4.769-003.0  |  |  |  |  |  |       | Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.                                    | <input type="checkbox"/> |
| Low pressure for units rated up to 1100 l/h                                       | 17 | 4.769-001.0  |  |  |  |  |  |       | For low pressure with machines up to 1.100 l/h                                                                                                                                               | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

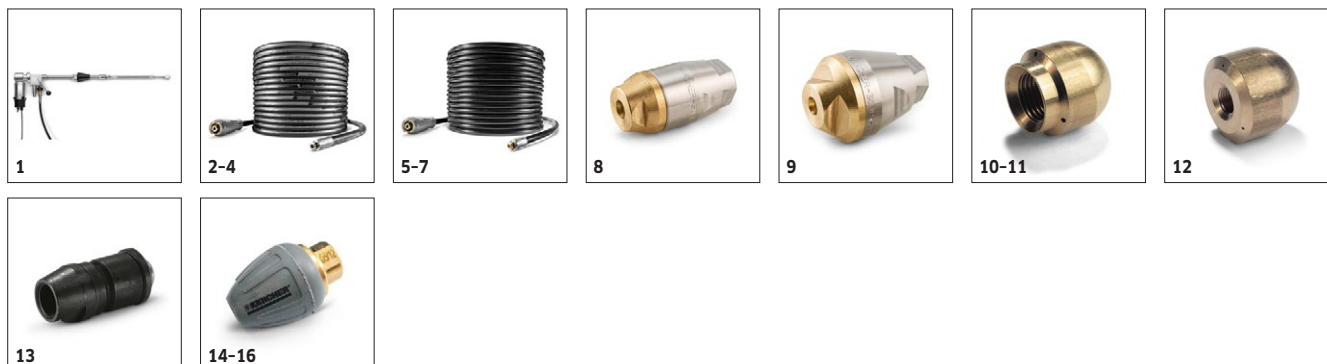**KÄRCHER**


|                                          |    | Order Number | Max. working pressure | Nozzle size | Diameter | Price | Description                                                                                                                                                                   |                          |
|------------------------------------------|----|--------------|-----------------------|-------------|----------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Barrel and tank cleaning</b>          |    |              |                       |             |          |       |                                                                                                                                                                               |                          |
| Barrel cleaner BC 14/12                  | 1  | 2.112-020.0  |                       |             |          |       | The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums - in particular oak barrels with a capacity between 225 and 600 liters.         | <input type="checkbox"/> |
| <b>Pipe cleaning hose, ID 6</b>          |    |              |                       |             |          |       |                                                                                                                                                                               |                          |
| Hose assembly TR pipe cleaning DN6 max.2 | 2  | 6.110-046.0  | 250 bar               |             |          |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Pipe cleaning hose, DN 6, 20 m, 220 bar  | 3  | 6.110-008.0  | 250 bar               |             |          |       | 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).                                                              | <input type="checkbox"/> |
| Hose assembly TR pipe cleaning DN6 max.2 | 4  | 6.110-047.0  | 250 bar               |             |          |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Hose assembly TR pipe cleaning DN6 14MPa | 5  | 6.110-048.0  | 140 bar               |             |          |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Pipe cleaning hose                       | 6  | 6.110-049.0  | 140 bar               |             |          |       | 20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).                                                                            | <input type="checkbox"/> |
| Pipe cleaning hose, DN 6, 30 m           | 7  | 6.110-050.0  | 140 bar               |             |          |       | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).                                                                            | <input type="checkbox"/> |
| <b>Pipe cleaning nozzle</b>              |    |              |                       |             |          |       |                                                                                                                                                                               |                          |
| Dirt blaster pipe cleaning D21/040       | 8  | 4.765-001.0  |                       | 40          | 21 mm    |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Dirt blaster pipe cleaning D30/040       | 9  | 4.765-004.0  |                       | 40          | 30 mm    |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Pipe cleaning nozzle                     | 10 | 5.763-015.0  |                       | 55          | 16 mm    |       | 16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.                                    | <input type="checkbox"/> |
|                                          | 11 | 5.763-020.0  |                       | 65          | 16 mm    |       |                                                                                                                                                                               | <input type="checkbox"/> |
|                                          | 12 | 5.763-017.0  |                       | 50          | 30 mm    |       | 30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.                                    | <input type="checkbox"/> |
| Rotating pipe cleaning nozzle            | 13 | 6.415-428.0  |                       | 50          | 16 mm    |       | Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.                                  | <input type="checkbox"/> |
| Drain cleaning dirt blaster D 25/040     | 14 | 6.415-944.0  |                       | 40          | 25 mm    |       | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling. | <input type="checkbox"/> |
| Drain cleaning dirt blaster D 30/040     | 15 | 6.415-946.0  |                       | 40          | 30 mm    |       |                                                                                                                                                                               | <input type="checkbox"/> |
| Drain cleaning dirt blaster D 35/040     | 16 | 6.415-948.0  |                       | 40          | 35 mm    |       |                                                                                                                                                                               | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0



1-4

|                                     |   | Order Number | Nozzle size |  |  |  | Price | Description                                                                                          |                          |
|-------------------------------------|---|--------------|-------------|--|--|--|-------|------------------------------------------------------------------------------------------------------|--------------------------|
| <b>HP nozzle spray angle 0°</b>     |   |              |             |  |  |  |       |                                                                                                      |                          |
| High-pressure nozzle spray angle 0° | 1 | 2.113-001.0  | 40          |  |  |  |       | High-pressure nozzle with powerful jet for extremely stubborn dirt.                                  | <input type="checkbox"/> |
| <b>Power nozzle spray angle 15°</b> |   |              |             |  |  |  |       |                                                                                                      |                          |
|                                     | 2 | 2.113-044.0  | 38          |  |  |  |       |                                                                                                      | <input type="checkbox"/> |
| <b>Power nozzle spray angle 25°</b> |   |              |             |  |  |  |       |                                                                                                      |                          |
| Power nozzle spray angle 25°        | 3 | 2.113-006.0  | 38          |  |  |  |       | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains. | <input type="checkbox"/> |
| <b>Power nozzle spray angle 40°</b> |   |              |             |  |  |  |       |                                                                                                      |                          |
| Power nozzle spray angle 40°        | 4 | 2.113-003.0  | 40          |  |  |  |       | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.    | <input type="checkbox"/> |

■ Included in delivery.    □ Available accessories.    ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**



|                                                                     |   | Order Number | Nozzle size |  |  |  | Price | Description                                                                                                                                                             |                          |
|---------------------------------------------------------------------|---|--------------|-------------|--|--|--|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Wet blasting attachment (without nozzle)</b>                     |   |              |             |  |  |  |       |                                                                                                                                                                         |                          |
| Wet blasting attachment with flow control (without nozzles)         | 1 | 4.115-000.0  |             |  |  |  |       | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.                       | <input type="checkbox"/> |
| Wet blasting attachment without flow control (nozzles not included) | 2 | 4.115-006.0  |             |  |  |  |       | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control. | <input type="checkbox"/> |
| <b>Nozzle pack for wet blasting attachment</b>                      |   |              |             |  |  |  |       |                                                                                                                                                                         |                          |
| Nozzle pack TR wet jet set 0040                                     | 3 | 2.112-019.0  | 40          |  |  |  |       |                                                                                                                                                                         | <input type="checkbox"/> |
| <b>Boron carbide nozzle</b>                                         |   |              |             |  |  |  |       |                                                                                                                                                                         |                          |
| Boron carbide nozzle, for machines as of 1000 l/h                   | 4 | 6.415-084.0  | 6 mm        |  |  |  |       | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.                                                         | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**




|                                                |   | Order Number | Flow rate   |  |  |  | Price | Description                                                                                                                                                                                                                            |                          |
|------------------------------------------------|---|--------------|-------------|--|--|--|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Cup foam lance</b>                          |   |              |             |  |  |  |       |                                                                                                                                                                                                                                        |                          |
| Foam lance TR                                  | 1 | 4.112-053.0  | 350-600 l/h |  |  |  |       |                                                                                                                                                                                                                                        | <input type="checkbox"/> |
| Packing complete for 6.394-969.0               | 2 | 2.112-018.0  |             |  |  |  |       |                                                                                                                                                                                                                                        | <input type="checkbox"/> |
| Tank grey only for replacement 1L              | 3 | 6.414-050.0  |             |  |  |  |       |                                                                                                                                                                                                                                        | <input type="checkbox"/> |
| <b>Inno Foam Set</b>                           |   |              |             |  |  |  |       |                                                                                                                                                                                                                                        |                          |
| Inno foam kit with detergent injector          | 4 | 2.112-000.0  |             |  |  |  |       | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.                                  | <input type="checkbox"/> |
| <b>Easy Foam Set</b>                           |   |              |             |  |  |  |       |                                                                                                                                                                                                                                        |                          |
| Easy Foam Set with RM injector                 | 5 | 2.112-010.0  |             |  |  |  |       | HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | <input type="checkbox"/> |
| <b>Nozzle kits for Inno/Easy Foam Set</b>      |   |              |             |  |  |  |       |                                                                                                                                                                                                                                        |                          |
| Nozzle kit 060 for Inno/Easy Set 600 - 700 l/h | 6 | 2.111-018.0  | 600-700 l/h |  |  |  |       | Optimal adaptation to different machine outputs for economic use.                                                                                                                                                                      | <input type="checkbox"/> |
| <b>Foam nozzle mounting kit</b>                |   |              |             |  |  |  |       |                                                                                                                                                                                                                                        |                          |
| Foam nozzle kit                                | 7 | 2.112-013.0  |             |  |  |  |       | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.                                                                                         | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**

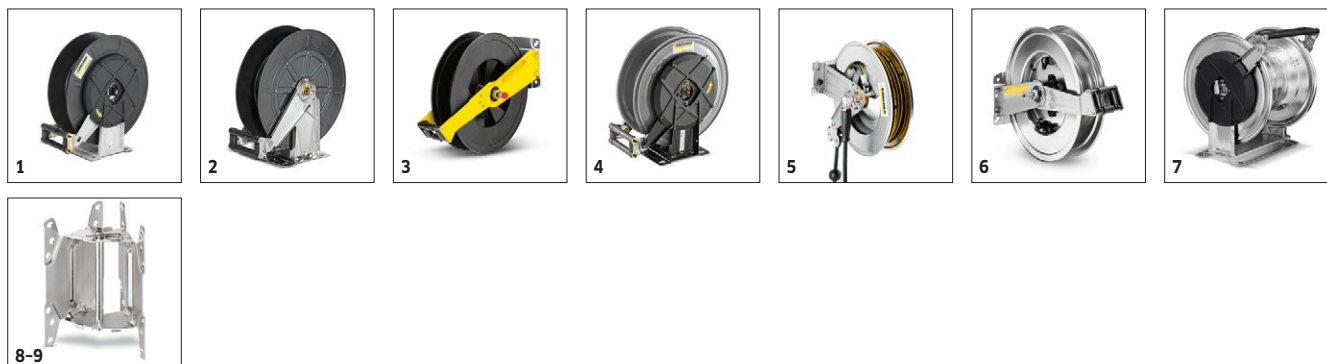

|                                             |   | Order Number | Length |  |  |  |  | Price | Description                                                                                                                                                                                                                |                          |
|---------------------------------------------|---|--------------|--------|--|--|--|--|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Automatic, self-winding hose reels</b>   |   |              |        |  |  |  |  |       |                                                                                                                                                                                                                            |                          |
| Add-on kit hose reel plastics               | 1 | 6.392-074.0  | 20 m   |  |  |  |  |       | Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.                                                                                              | <input type="checkbox"/> |
| Add-on kit hose reel                        | 2 | 6.392-083.0  | 20 m   |  |  |  |  |       | Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.                                                                                                   | <input type="checkbox"/> |
| Hose reel, automatic, 20 m, painted         | 3 | 6.392-106.0  | 20 m   |  |  |  |  |       | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.                                                                                                                       | <input type="checkbox"/> |
|                                             | 4 | 6.392-105.0  | 20 m   |  |  |  |  |       |                                                                                                                                                                                                                            | <input type="checkbox"/> |
| Hose reel, automatic, 20 m, stainless steel | 5 | 6.392-076.0  | 20 m   |  |  |  |  |       | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.                                                                                                                             | <input type="checkbox"/> |
| ABS hose reel stainless steel               | 6 | 6.392-122.0  | 20 m   |  |  |  |  |       | High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled spring drive. Connection for HP hoses with nipple. | <input type="checkbox"/> |
| Add-on kit hose reel TR 40m                 | 7 | 6.392-442.0  | 40 m   |  |  |  |  |       |                                                                                                                                                                                                                            | <input type="checkbox"/> |
| Swivel holder                               | 8 | 2.639-931.0  |        |  |  |  |  |       | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.                                                                    | <input type="checkbox"/> |
| ABS wall fastening stainless steel          | 9 | 2.641-867.0  |        |  |  |  |  |       | Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.                                                                   | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**



|                                     |    | Order Number | Length | Diameter |  | Price | Description                                                                                                                                                                                              |                          |
|-------------------------------------|----|--------------|--------|----------|--|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Other HP Accessories</b>         |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| Starting current limiter            | 1  | 2.637-495.0  |        |          |  |       | Reduces starting current in single-phase supply and protects line fuse.                                                                                                                                  | <input type="checkbox"/> |
| <b>Geka coupling</b>                |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| With hose nozzle, R 1/2"            | 2  | 6.388-461.0  |        |          |  |       | with hose liner                                                                                                                                                                                          | <input type="checkbox"/> |
| With hose nozzle, R 3/4"            | 3  | 6.388-455.0  |        |          |  |       |                                                                                                                                                                                                          | <input type="checkbox"/> |
| With hose nozzle, R 1"              | 4  | 6.388-465.0  |        |          |  |       |                                                                                                                                                                                                          | <input type="checkbox"/> |
| With female thread, R 3/4"          | 5  | 6.388-473.0  |        |          |  |       | with female thread                                                                                                                                                                                       | <input type="checkbox"/> |
| <b>Suction filter</b>               |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| Water filter                        | 6  | 6.414-956.0  |        |          |  |       |                                                                                                                                                                                                          | <input type="checkbox"/> |
| Suction filter with check valve     | 7  | 4.730-012.0  |        |          |  |       | Brass suction filter suitable for ponds, storage tanks, etc. With check valve.                                                                                                                           | <input type="checkbox"/> |
| <b>Fine-mesh water filter</b>       |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| Fine-mesh water filter with adapter | 8  | 4.730-102.0  |        |          |  |       | Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1". | <input type="checkbox"/> |
| <b>Water supply hose</b>            |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| Water supply hose                   | 9  | 4.440-038.0  | 7,5 m  |          |  |       | NW 13 R1" / R 3/4", up to 30 °C                                                                                                                                                                          | <input type="checkbox"/> |
|                                     | 10 | 4.440-207.0  | 7,5 m  |          |  |       | NW 19 R1" / R 3/4", up to 85 °C, for pick-up                                                                                                                                                             | <input type="checkbox"/> |
| <b>Backflow check valve</b>         |    |              |        |          |  |       |                                                                                                                                                                                                          |                          |
| Backflow preventer                  | 11 | 2.641-374.0  |        |          |  |       | To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection      | <input type="checkbox"/> |

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# HD 6/13 CX PLUS

## 1.520-955.0

**KÄRCHER**



|                                |   | Order Number | Flow rate   |  |  |  | Price | Description                                                                                                |                          |
|--------------------------------|---|--------------|-------------|--|--|--|-------|------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Push-on washing brush</b>   |   |              |             |  |  |  |       |                                                                                                            |                          |
| Push-on washing brush          | 1 | 4.762-497.0  |             |  |  |  |       | With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles. | <input type="checkbox"/> |
| Push-on wash brush, M 18 x 1.5 | 2 | 4.113-001.0  |             |  |  |  |       | Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.                      | <input type="checkbox"/> |
| <b>Rotating washing brush</b>  |   |              |             |  |  |  |       |                                                                                                            |                          |
|                                | 3 | 4.113-004.0  | 500-800 l/h |  |  |  |       |                                                                                                            | <input type="checkbox"/> |
|                                | 4 | 4.113-003.0  | 500-800 l/h |  |  |  |       |                                                                                                            | <input type="checkbox"/> |

■ Included in delivery.    □ Available accessories.    ▲ Extension hose.

HD 6/13 CX Plus, 1.520-955.0, 2019-03-29