SC series

Warning Light & Electric Horn Combinations

Qlight

IP44 | -20→+50℃ | HORN | 108dB | 115dB

SC series can combine all of our warning light and electric horn products into a single combination model depending on your specific needs

SC1

The budget model of small-sized warning light and electric horn combinations

• Protection rating : IP44(IP rating may be varied depending on configuration of the product.)
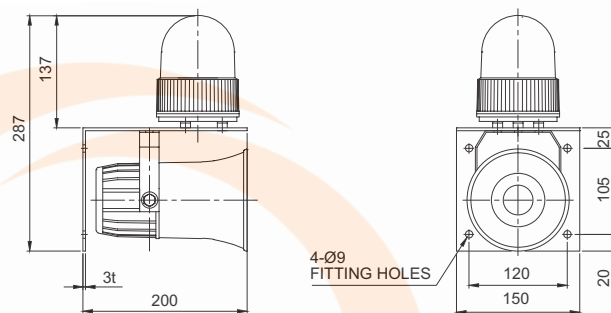
Specification for Standard Model

• Standard combination includes S100R products combination with S100E (same as pictured to the left)

Technical Diagram (Units : mm)

SC1

137
287
3t
200
4-Ø9 FITTING HOLES
25
105
120
150
20

SC1

Customization

• Warning light : Select one from S100 series for the combination
• Electric horn : Select one from SN, S100E, SEN15/ 25 for the combination

SC2

Most commonly used standard-sized warning light and electric horn combination model

• Protection rating : IP44(IP rating may be varied depending on configuration of the product.)
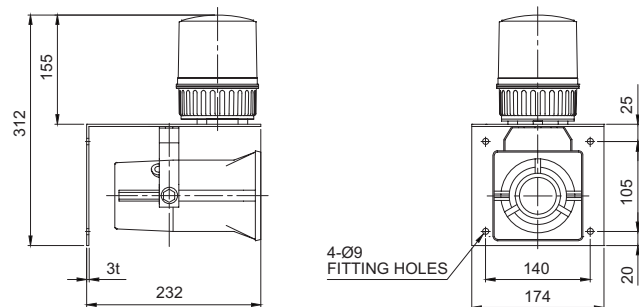
Specification for Standard Model

• Standard combination includes S125U products combined with the SEN15 (Same as pictured to the left)

Technical Diagram (Units : mm)

SC2

155
312
3t
232
4-Ø9 FITTING HOLES
25
105
140
174
20

SC2

Customization

• Warning light : Select one from S125 series for the combination
• Electric horn : Select one from SN, S100E, SEN15/ 25 for the combination

IP56 | -20→50℃ | HORN | 118dB | 120dB

SC3

SC3

Waterproof, dustproof type warning light and electric horn combinations
• Protection rating : IP56(IP rating may be varied depending on configuration of the product.)

Common Specifications

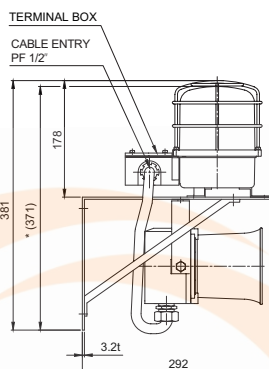• Combination of SH1-2T and signal horn SEWN30L(Same as pictured to the left)
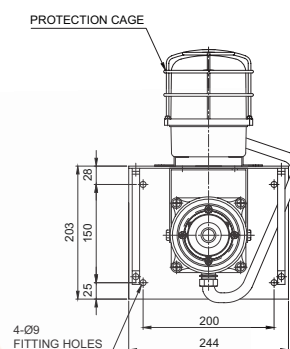
Technical Diagram   (Units : mm)

SC3

TERMINAL BOX
CABLE ENTRY
PF 1/2"
178
381
*(371)
3.2t
292

PROTECTION CAGE
28
203
150
25
4-Ø9
FITTING HOLES
200
244

※ *(371) represents without protection cage.

Customization

• Warning light : Select between models SH1P-2T and SH2P-2T series
 (Please refer to page 15-21)
• Electric horn : Choose one model among SEWN30L/50L, SEHN25 and SEHN50
 (Please refer to page 43-48)
• Stainless steel bracket

Standard Model Number

SC1	-	220	-	R
[Model number]		[Voltage]		[Color]

• SC1 (S100R+S100E)
• SC2 (S125U+SEN15)
• SC3 (SH1P-2T+SEWN30L)

• 12-DC12V
• 24-DC24V
• 110-AC110V
• 220-AC220V

● R-Red
● A-Amber
● G-Green
● B-Blue

Ordering Specification

SC3	- (	SH1P-2T	-	R	+	SEWN30L	-	WS	) -	220
[Model number]		[Light type]		[Color]		[Horn type]		[Sound]		[Voltage]

• SC1 — Select 1 model among S100 series

• SC2 — Select 1 model among S125 series

• SC3 — Select 1 model among SH1P-2T and SH2P-2T series

● R-Red
● A-Amber
● G-Green
● B-Blue

• Select 1 model among SN, S100E and SEN15/25

• Select 1 model among S100E and SEN15/25

• Select 1 model among SEWN30L/50L and SEHN25/50

• WS -Warning sounds
• WP -Special warning sounds
• WM -Melodies
• WA -Alarms
• WV -Customizable voices

• 12-DC12V
• 24-DC24V
• 110-AC110V
• 220-AC220V

※ Light sources can be selected among LED revolving, LED steady/flashing, xenon strobe and bulb revolving type.

Contact: +971507924960
Email: sales@industrytechstore.com
Website: www.industrytechstore.com

INDUSTRY TECH STORE