




FDL-R24 · FDL-R27


Marine Projector Floodlight with Front Glass

FDL-R24

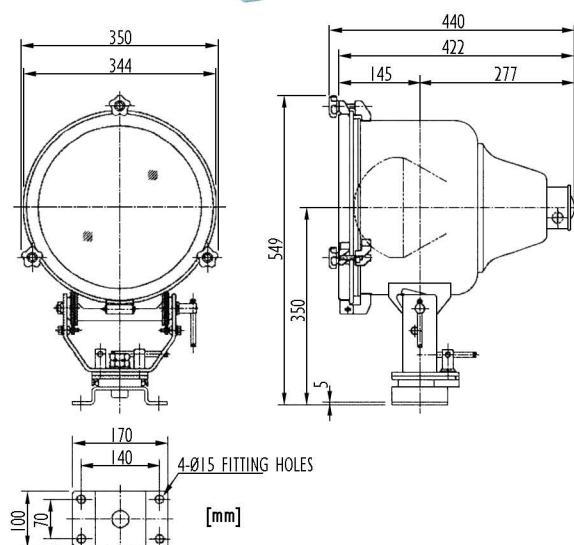

Model	FDL-R24
ingress protection	IP 56
mounting	Flange
material	Stainless steel (body) Tempered front glass
source voltage	Max. 250V
applicable lamp	RF-H 750W/1000W HRF-200/250/300/400X NHR 150/250/400X
lamp holder	TE-39
elevation angle	Up 60°, Down 60°
horizontal turning angle	360°
weight	9.9 kg

FDL-R27

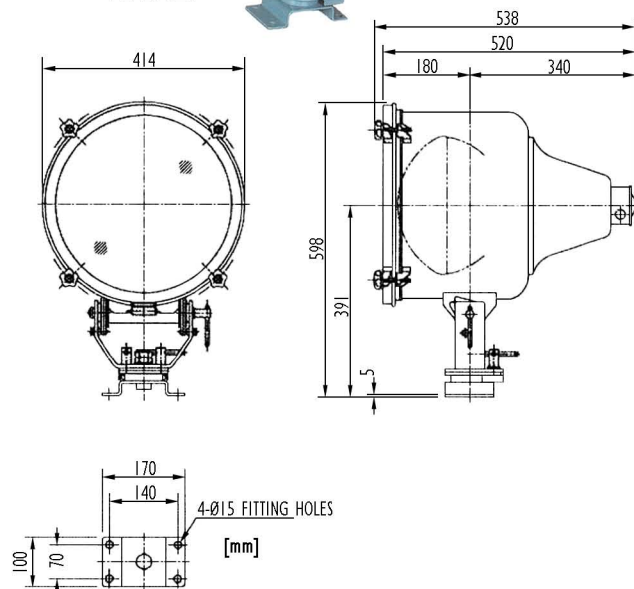

Model	FDL-R27
ingress protection	IP 56
mounting	Flange
material	Stainless steel (body) Tempered front glass
source voltage	Max. 250V
applicable lamp	HRF-700/1000X HR-700/1000X
lamp holder	TE-39
elevation angle	Up 55°, Down 60°
horizontal turning angle	360°
weight	13.8 kg