



1020600931

VSP-211-L

Main Station - Batteryless Telephone System - 12-Way

- 12 extensions selector switch
- Equipped with the built-in system amplifier w/capacitor battery
- ✓ Terminals for auxiliary 24VDC when used as Common Battery Telephones.
- To avoid noise problems, the 24VDC must be supplied via a DC / DC converter
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS-G
- Desk mounting with corresponding wooden cabinet type VSPC-OAK
- Suitable for installation in wheelhouse or control room

Description


VSP-211-L Main Station: Batteryless Telephone System

The VSP-211-L main station is part of our 12-way Batteryless telephone system. The 12-Way system consists of up to 12 main stations with selector switch for selective calling between all connected stations.

- Flush-Mounting or optionally on wall or desk by means of an additional back-box for convenience
- ✓ 12-Position Selector Switch: Facilitates selective calling among all connected stations, ensuring targeted communication.
- O Built-In System Amplifier: Powered by a capacitor battery, it guarantees continuous operation, vital during power outages.

Ideal for strategic installation onboard, the VSP-211-L ensures robust, uninterrupted communication, fulfilling SOLAS requirements for secondary communication systems.

Technical Dimensions

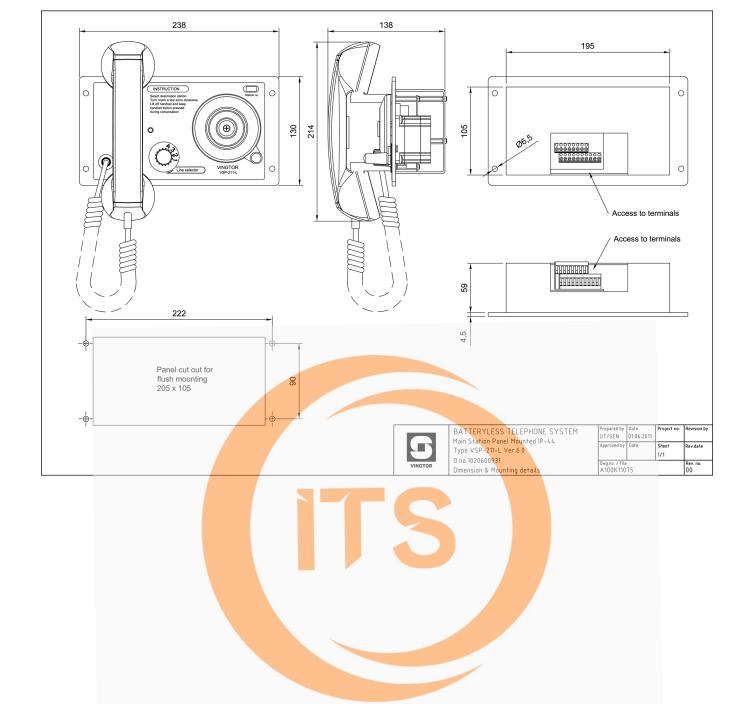

Specifications

GENERAL

Connections Screw terminals Color Color Black IP rating IP-44 (in console) Dimensions (WxHxD) 238 x 205 x 137 mm (w/ handset and built-in depth) Panel cut-out 205 x 105 mm Weight 1.30 kg Operating temperature range -25°C to 55°C Compass Safe Distance > 155cm		
IP rating IP-44 (in console) Dimensions (WxHxD) 238 x 205 x 137 mm (w/ handset and built-in depth) Panel cut-out 205 x 105 mm Weight 1.30 kg Operating temperature range -25°C to 55°C	Connections	Screw terminals Color
Dimensions (WxHxD) 238 x 205 x 137 mm (w/ handset and built-in depth) Panel cut-out 205 x 105 mm Weight 1.30 kg Operating temperature range -25°C to 55°C	Color	Black
handset and built-in depth) Panel cut-out Weight 1.30 kg Operating temperature range -25°C to 55°C	IP rating	IP-44 (in console)
Weight 1.30 kg Operating temperature range -25°C to 55°C	Dimensions (WxHxD)	· ·
Operating temperature range -25°C to 55°C	Panel cut-out	205 x 105 mm
	Weight	1.30 kg
Compass Safe Distance > 155cm	Operating temperature range	-25°C to 55°C
	Compass Safe Distance	> 155cm





MBOKS-G

VSP Batteryless Telephone System



VSP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable



CD-4

Plugbox Waterproof



VSP-36-PELP-A

Headset with boom mic, headband, and 10m cable



VSP-36-PELP-A/20

Headset with boom mic, headband, and 20m cable



VSP-36-PELP-A/25

Headset with boom mic, headband, and 25m cable



IRR-24

Relay Box



page 4/4

Contact: +971507924960 Email: sales@industrytechstore.com Website: www.industrytechstore.com

