



MULTIPURPOSE WATERTIGHT LUMINAIRE FOR
ENGINE ROOMS, WORK SHOPS, STORES,
PASSAGE WAYS AND OUTDOOR AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, seamless deep drawn, powder coated white (RAL9016)
Cover	Clear or opal polycarbonate, impact-proof, UV resistant
Mounting	Different systems available, see next page
Cable entry	Max. 4 cable glands M20
Protection class	IP67
Light source	Linear LP LED modules with anti-glare cover
Wattage	Max. 20 W / HO: max. 30 W
CCT (color)	4,000 K
Luminous flux	2,200 lm / HO: 4,500 lm (clear cover)
CRI	≥ 80
Voltage	220–240 V AC
Frequency	50–60 Hz

PART NO.

TL40S	5105012000-xxx
TL40S HO	5105012900-xxx

SPARE PARTS

PART NO.



Clear cover TL40S	7112001100
Opal cover TL40S	7112001900
Clamps (6 pcs)	7106000300

EXTRAS

- > TL40S Plus: –40°C ... +60°C
- > Stainless steel housing
- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > LED mounting tray as refit for TL40 fluorescent types
- > Exterior connection box
- > Emergency battery back-up
- > Different color temperatures
- > Different cable glands
- > IP66





Type: Bolt kit 8 mm

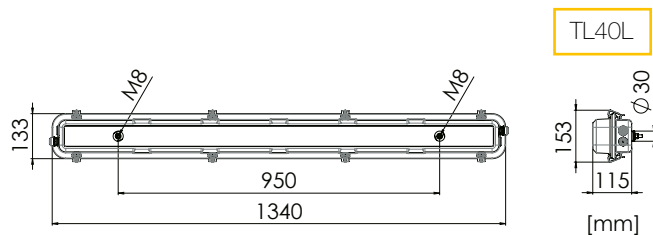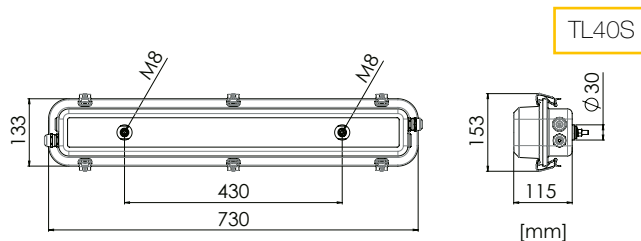

Type: Bolt kit 8 mm





Type: LP160

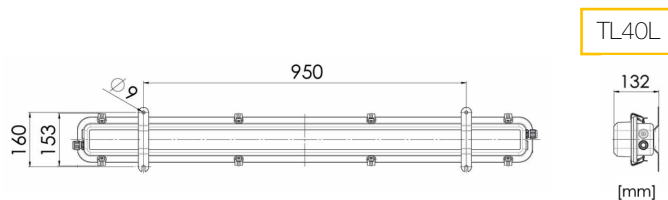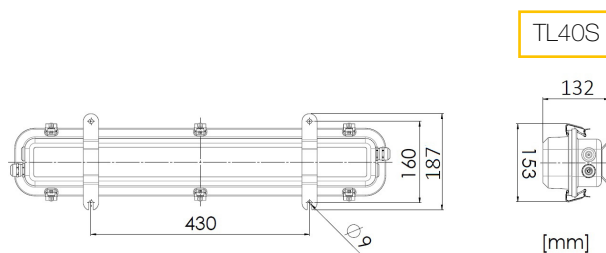

Type: LP160



Type: LP GL

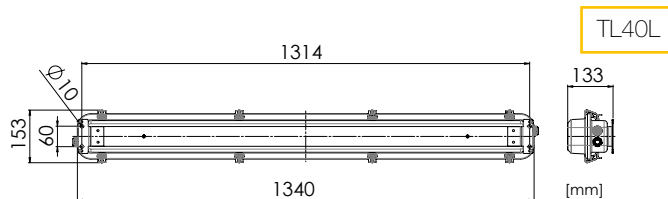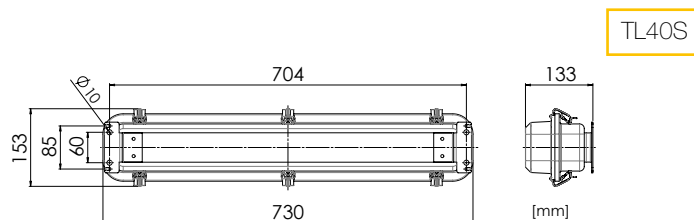

Type: LP GL



Type: Pipe brackets

