

## Lighting

### Linear luminaire With LED

#### GRP

6002/4168-0210-172-1110-11-8500 Art. No. 309307



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Optionally addressable for direct actuation of a common battery system

#### MY R. STAHL 6002D



The linear luminaire with Series 6002/4 LED is ideal for lighting surfaces at a mounting height of up to 10 m. It can also be used to illuminate equipment and objects, both inside and outside. The pole mounting sleeve accessory can be used to easily mount the luminaire on poles. Optionally, the luminaire can be equipped with addressable equipment. It can be used to control and monitor the luminaire for the common battery systems.

#### Technical Data

##### Explosion Protection

Ex version	Yes
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX IBE 14.0035
IECEX gas certificate	IECEX IBE 14.0035
IECEX gas explosion protection	Ex db eb ib op is IIC T4 Gb
IECEX dust certificate	IECEX IBE 14.0035
IECEX dust explosion protection	Ex tb op is IIIC T100 °C Db
ATEX gas certificate	IBExU 14ATEX1088
ATEX gas certificate	IBExU 14ATEX1088
ATEX gas explosion protection	Ex II 2 G Ex db eb ib op is IIC T4 Gb
ATEX dust certificate	IBExU 14ATEX1088
ATEX dust explosion protection	Ex II 2 D Ex tb op is IIIC T100 °C Db
Certificates and approvals	ATEX IECEX UKEX
Certificates	ATEX (IBE), IECEX (IBE), India (PESO)
Ship approval	DNV
Declaration of conformity	ATEX (EUK)

##### Electrical Data

Rated operational voltage AC	110 ... 240 V
Rated operational voltage DC	110 ... 250 V
Interfaces	DALI
Frequency range	50 – 60Hz

##### Lighting Data

Number of lamps	1
Lamp wattage	50 W

# Lighting

## Linear luminaire With LED

### GRP

6002/4168-0210-172-1110-11-8500 Art. No. 309307

STAHL

#### Lighting Data

Lamp	LED
Light colour	5000 K – neutral white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	139 lm/W
Luminous flux	6960 lm
Colour rendering	≥ 80
Colour temperature	5000 K

#### Ambient Conditions

Ambient temperature	-20 °C ... 50 °C Note: Through wiring Max. 3x16 A -20 °C ... 60 °C Note: Through wiring 2 Max. 3x10 A
---------------------	--

#### Mechanical Data

Version	Standard
Translucent cover	Clear
IP degree of protection (IEC 60598)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Light grey (RAL 7035)
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3 + D1+D2
Max. solid connection terminals	6 mm <sup>2</sup>
Max. finely stranded connection terminals	4 mm <sup>2</sup>
Type of connection cable	Finely stranded Solid
Size	6
Width	184 mm
Height	125 mm
Length	1610 mm
Impact strength (IEC 62262)	IK10
Weight	8 kg
Weight	17.64 lb
Disconnection of the luminaire	No

#### Components

Threaded plate	2x plastic
Ballast	6045/311-111-10
Through wiring	With 7 conductors 2.5 mm <sup>2</sup>
Drilled holes	3 x M25
Cable glands and entries	2 x M25 Ø 7 ... 17 mm
Material cable gland	Polyamide, black
Stopping plugs	2 x M25 x 1.5
Stopping plug material	Polyamide, black
Accessories	Provided

# Lighting


## Linear luminaire With LED

### GRP


6002/4168-0210-172-1110-11-8500 Art. No. 309307




#### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations




Ring bolt fitted in insert nut of the luminaire

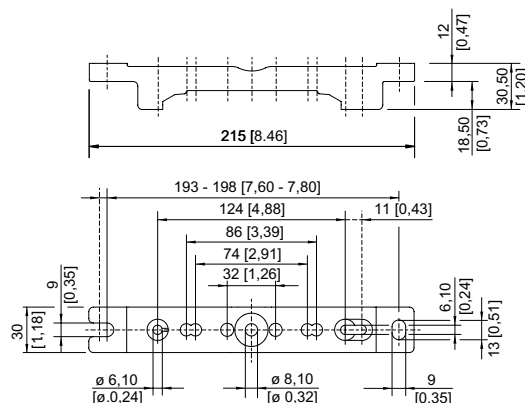


Mounting rail





Mounting rail



Pipe clamp fitted in mounting rail




Mounting bracket fitted in mounting rail



Wall mounting bracket fitted in mounting rail

## Accessories

### Box spanner




M8 / A/F 13;  
For actuating the central lock

### Art. No.

222430


### Breather



Thread: M25 x 1.5 (20 pieces); without jam nut


### Art. No.

285780



Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut

296608



M25 x 1.5 in order to avoid condensate formation

115738

# Lighting

## Linear luminaire With LED


### GRP

6002/4168-0210-172-1110-11-8500 Art. No. 309307

STAHL

#### Ceiling and wall mounting bracket

#### Art. No.



mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair

222827

#### Holder for translucent cover

#### Art. No.




The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.

222691

#### Mounting bracket

#### Art. No.




mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair

222456

#### Mounting rail

#### Art. No.




for a variable mounting distance; 1 pair

222826

#### Pipe clamp

#### Art. No.



R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair

222459

R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair


222458

R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair

222460

#### Protection against accidental contact

#### Art. No.



The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.

283153

#### Ring bolt

#### Art. No.




M8, direct mounting in insert nuts; 1 pair

115736

## Spare Parts

#### Cover

#### Art. No.



for luminaire size 6

222429

## Lighting

Linear luminaire With LED


GRP

6002/4168-0210-172-1110-11-8500 Art. No. 309307

STAHL

Reflector plate

Art. No.



308995

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.

