



Frequency Converter with Trip Values KFD2-UFC-Ex1.D

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input for NAMUR sensors or dry contacts
- Input frequency 1 mHz ... 5 kHz
- Current output 0/4 mA ... 20 mA
- Relay contact and transistor output
- Start-up override
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC/EN 61508 / IEC/EN 61511



SIL 2



Function

This isolated barrier is used for intrinsic safety applications.

The device is a universal frequency converter that changes a digital input signal into a proportional free adjustable 0/4 mA ... 20 mA analog output signal and functions as a switch amplifier and a trip alarm.


The functions of the switch outputs (2 relay outputs and 1 potential free transistor output) are easily adjustable [trip value display (min/max alarm), serially switched output, pulse divider output, error signal output].

The device is easily configured by the use of keypad or with the PACTware configuration software.

A fault is signalized by LEDs acc. to NAMUR NE44 and a separate collective error message output.

For additional information, refer to the manual and www.pepperl-fuchs.com.

Connection

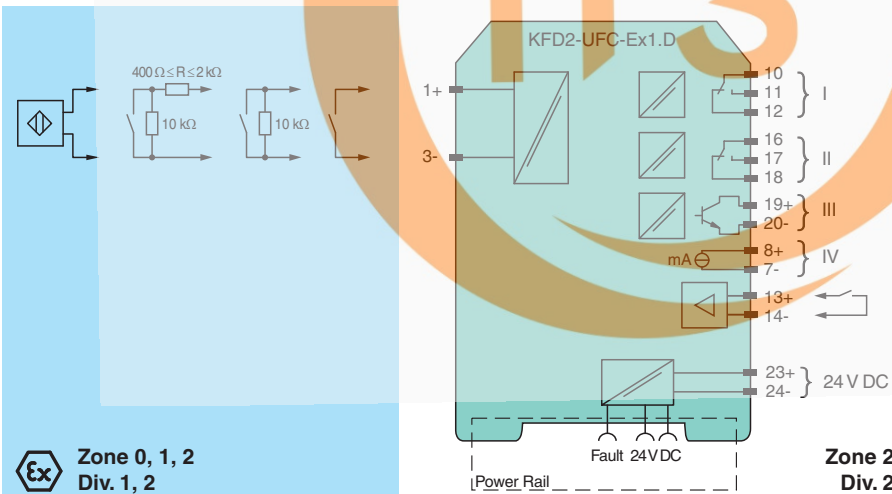

Technical Data

General specifications

Signal type	Digital Input
-------------	---------------

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 2
------------------------------	-------

Supply

Connection	terminals 23+, 24- or power feed module/Power Rail	
Rated voltage	U_r	20 ... 30 V DC
Rated current	I_r	approx. 100 mA
Power dissipation/power consumption	≤ 2 W / 2.2 W	

Interface

Technical Data

Programming interface	programming socket
Input	
Connection side	field side
Connection	Input I: intrinsically safe: terminals 1+, 3- Input II: non-intrinsically safe: terminals 13+, 14-
Input I	sensor acc. to EN 60947-5-6 (NAMUR) or mechanical contact
Pulse duration	> 50 µs
Input frequency	0.001 ... 5000 Hz
Line fault detection	breakage $I \leq 0.15$ mA; short-circuit $I > 6.5$ mA
Input II	startup override: 1 ... 1000 s, adjustable in steps of 1 s
Active/Passive	$I > 4$ mA (for min. 100 ms) / $I < 1.5$ mA
Open circuit voltage/short-circuit current	18 V / 5 mA
Output	
Connection side	control side
Connection	output I: terminals 10, 11, 12 output II: terminals 16, 17, 18 output III: terminals 19+, 20- output IV: terminals 8+, 7-
Output I, II	signal, relay
Contact loading	253 V AC / 2 A / $\cos \phi \geq 0.7$; 40 V DC / 2 A
Mechanical life	5×10^7 switching cycles
Energized/De-energized delay	approx. 20 ms / approx. 20 ms
Output III	electronic output, passive
Contact loading	40 V DC
Signal level	1-signal: (L+) - 2.5 V (50 mA, short-circuit/overload proof) 0-signal: switched off (off-state current ≤ 10 µA)
Output IV	analog
Current range	0 ... 20 mA or 4 ... 20 mA
Open loop voltage	max. 24 V DC
Load	max. 650 Ω
Fault signal	downscale $I \leq 3.6$ mA , upscale ≥ 21.5 mA (acc. NAMUR NE43)
Collective error message	Power Rail
Transfer characteristics	
Input I	
Measurement range	0.001 ... 5000 Hz
Resolution	0.1 % of the measurement value , ≥ 0.001 Hz
Accuracy	0.1 % of the measurement value , > 0.001 Hz
Measuring time	< 100 ms
Influence of ambient temperature	0.003 %/K (30 ppm)
Output I, II	
Response delay	≤ 200 ms
Output IV	
Resolution	< 10 µA
Accuracy	< 20 µA
Influence of ambient temperature	0.005 %/K (50 ppm)
Galvanic isolation	
Input I/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output I, II/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Mutual output I, II, III	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Output III/power supply and collective error	basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V _{eff}
Output III/start-up override	basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V _{eff}
Output III/IV	basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V _{eff}
Output IV/power supply and collective error	functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Start-up override/power supply and collective error	functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}

Technical Data


Interface/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}	
Interface/output III		basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V _{eff}	
Indicators/settings			
Display elements		LEDs , display	
Control elements		Control panel	
Configuration		via operating buttons via PACTware	
Labeling		space for labeling at the front	
Directive conformity			
Electromagnetic compatibility			
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)	
Low voltage			
Directive 2014/35/EU		EN 61010-1:2010	
Conformity			
Electromagnetic compatibility		NE 21:2006	
Degree of protection		IEC 60529:2001	
Input		EN 60947-5-6:2000	
Ambient conditions			
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)	
Mechanical specifications			
Degree of protection		IP20	
Connection		screw terminals	
Mass		300 g	
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) (W x H x D) , housing type C2	
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001	
Data for application in connection with hazardous areas			
EU-type examination certificate		TÜV 99 ATEX 1471	
Marking		Ⓢ II (1)G [Ex ia Ga] IIC Ⓢ II (1)D [Ex ia Da] IIIC Ⓢ I (M1) [Ex ia Ma] I	
Supply			
Maximum safe voltage		U _m	40 V DC (Attention! U _m is no rated voltage.)
Input I		terminals 1+, 3-: Ex ia	
Voltage U _o		10.1 V	
Current I _o		13.5 mA	
Power P _o		34 mW (linear characteristic)	
Input II		terminals 13+, 14- non-intrinsically safe	
Maximum safe voltage U _m		40 V (Attention! The rated voltage can be lower.)	
Output I, II		terminals 10, 11, 12; 16, 17, 18 non-intrinsically safe	
Maximum safe voltage		U _m	253 V (Attention! The rated voltage can be lower.)
Contact loading		253 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load	
Output III		terminals 19+, 20- non-intrinsically safe	
Maximum safe voltage U _m		U _m	40 V (Attention! U _m is no rated voltage.)
Output IV		terminals 8+, 7- non-intrinsically safe	
Maximum safe voltage		U _m	40 V DC (Attention! U _m is no rated voltage.)
Interface		RS 232	
Maximum safe voltage		U _m	40 V (Attention! U _m is no rated voltage.)
Certificate		TÜV 02 ATEX 1885 X	
Marking		Ⓢ II 3G Ex nA nC IIC T4 Gc	
Output I, II			
Contact loading		50 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load	
Galvanic isolation			
Input I/other circuits		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	

Technical Data

Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		16-538FM-12
UL approval		E223772
IECEx approval		
IECEx certificate		IECEx TUN 04.0007 IECEx TSA 18.0007X
IECEx marking		[Ex ia Ga] IIC, [Ex ia Da] IIC, [Ex ia Ma] I Ex ec nC IIC T4 Gc
General information		
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .	

Assembly

Front view

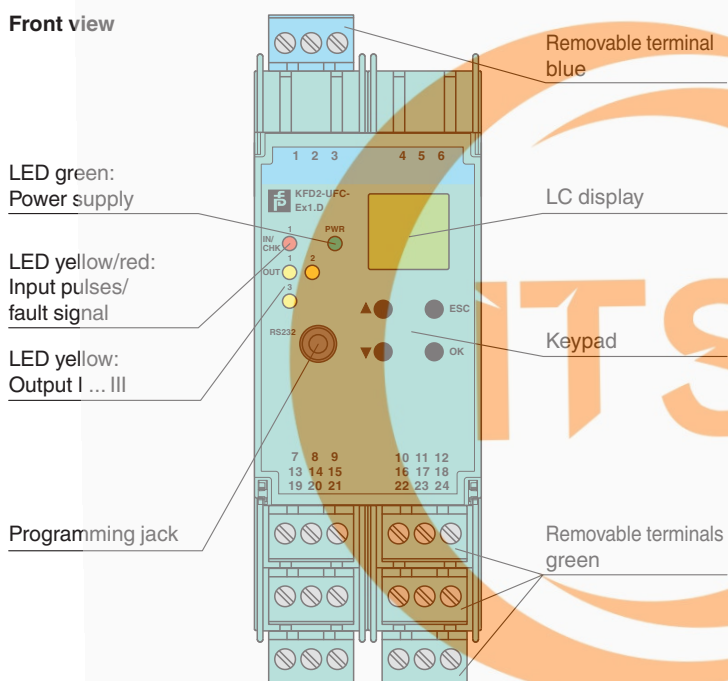

Matching System Components

	DTM Interface Technology	Device type manager (DTM) for interface technology
	PACTware 5.0	FDT Framework
	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m

Matching System Components

	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	F-NR3-Ex1	NAMUR Resistor Network
	K-250R	Measuring resistor
	K-500R0%1	Measuring resistor
	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Characteristic Curve

Maximum Switching Power of Output Contacts

