

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid

DIN rail power supply unit, primary-switched mode, 1-phase, output: 24 V DC / 5 A, for the potentially explosive area



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	1222.8 GRM
Custom tariff number	85044082
Country of origin	Thailand

Technical data

Dimensions

Width	55 mm
Height	130 mm
Depth	125 mm
Width with alternative assembly	122 mm
Height with alternative assembly	130 mm
Depth with alternative assembly	58 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (/ +40°C)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	100 % (condensation permitted)
Noise immunity	EN 61000-6-2:2005

Input data

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Technical data

Input data

Input voltage range	85 V AC ... 264 V AC
	90 V DC ... 250 V DC
AC frequency range	45 Hz ... 65 Hz
Frequency range DC	0 Hz
Current consumption	approx. 1.6 A (120 V AC)
	0.8 A (230 V AC)
Nominal power consumption	120 W
Inrush surge current	< 20 A (typical)
Power failure bypass	> 20 ms (120 V AC)
	> 120 ms (230 V AC)
Input fuse	5 A (slow-blow, internal)
Choice of suitable fuses	6 A ... 16 A (Characteristics B, C, D, K)

Output data

Nominal output voltage	24 V DC $\pm 1\%$
Setting range of the output voltage	22.5 V DC ... 28.5 V DC
Output current	5 A (Up to +60°C)
	7.5 A (with POWER BOOST)
Derating	60 °C ... 70 °C (2.5%/K)
Connection in parallel	Yes, for redundancy and increased capacity
Connection in series	Yes
Residual ripple	< 100 mV _{PP}
Peak switching voltages nominal load	< 50 mV _{PP} (20 MHz)
Maximum power dissipation NO-Load	2.7 W
Power loss nominal load max.	18 W

General

Net weight	1 kg
Operating voltage display	Green LED
Efficiency	> 87 %
Insulation voltage input/output	4 kV AC (routine test)
	2 kV AC (type test)
Protection class	I
MTBF (IEC 61709, SN 29500)	> 500000 h
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: Horizontally 0 mm, vertically 50 mm
Electromagnetic compatibility	Conformance with EMC directive 89/336/EC
Noise emission	EN 50081-2

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Technical data

General

Declaration of conformity in acc. with EN 60079-15	# II 3 G Ex nAC IIC T4 X
ATEX	# II 3 G Ex nAC IIC T4
Standard - Safety of transformers	EN 61558-2-17
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
	EN 61558-2-17
Shipbuilding approval	Germanischer Lloyd (EMC 2)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
	DIN VDE 0106-1010
Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard - Equipment safety	GS (tested safety)
Information technology equipment - safety (CB scheme)	CB Scheme
UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950
	UL/C-UL Listed UL 1604 Class I, Division 2, Groups A, B, C, D

Connection data, input

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3

Connection data, output

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm

Signaling

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Technical data

Signaling

Output name	DC OK active
Output description	$U_{OUT} > 0.9 \times U_N$: High signal
Maximum switching voltage	$\leq 24 \text{ V}$
Output voltage	+ 24 V DC (Signal)
Maximum inrush current	max. 44 mA
Continuous load current	$\leq 40 \text{ mA}$
Status display	"DC OK" LED green
Note on status display	$U_{OUT} < 0.9 \times U_N$: LED flashing
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M3
Output name	DC OK floating
Output description	Relay contact, $U_{OUT} > 0.9 \times U_N$: Contact closed
Maximum switching voltage	$\leq 30 \text{ V AC/DC}$
Maximum inrush current	max. 1 A
Continuous load current	$\leq 1 \text{ A}$
Status display	"DC OK" LED green

Classifications

eCl@ss

eCl@ss 4.0	27040702
eCl@ss 4.1	27040702
eCl@ss 5.0	27049002
eCl@ss 5.1	27049002
eCl@ss 6.0	27049002
eCl@ss 7.0	27049002
eCl@ss 8.0	27049002

ETIM

ETIM 2.0	EC001039
----------	----------

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Classifications

ETIM

ETIM 3.0	EC001039
ETIM 4.0	EC000599
ETIM 5.0	EC002540

UNSPSC

UNSPSC 6.01	30211502
UNSPSC 7.0901	39121004
UNSPSC 11	39121004
UNSPSC 12.01	39121004
UNSPSC 13.2	39121004

Approvals

Approvals

Approvals

UL Recognized / UL Listed / cUL Recognized / GOST / cUL Listed / GL / IEC CB Scheme / cULus Recognized / cULus Listed

Ex Approvals

UL Listed / cUL Listed / ATEX / cULus Listed

Approvals submitted

Approval details

UL Recognized 

UL Listed 

cUL Recognized 
--

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Approvals

GOST 
cUL Listed 
GL
IECEE CB Scheme 
cULus Recognized 
cULus Listed 

Accessories

Accessories

Assembly adapter

Assembly adapters - UWA 182/52 - 2938235



Universal wall adapter

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Accessories

Assembly adapters - QUINT-PS-ADAPTERS7/1 - 2938196



Assembly adapter for QUINT-PS... power supply on S7-300 rail

Assembly adapters - QUINT-PS-ADAPTERS7/2 - 2938206



Assembly adapter for QUINT POWER 10A on S7-300 rail

Mounting rail adapter


Assembly adapters - UTA 107 - 2853983



Universal DIN rail adapter


Drawings

Block diagram

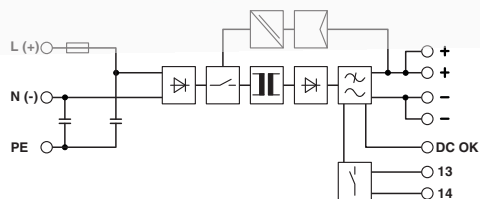

Power supply unit - QUINT-PS-100-240AC/24DC/ 5/EX - 2938853

Diagram

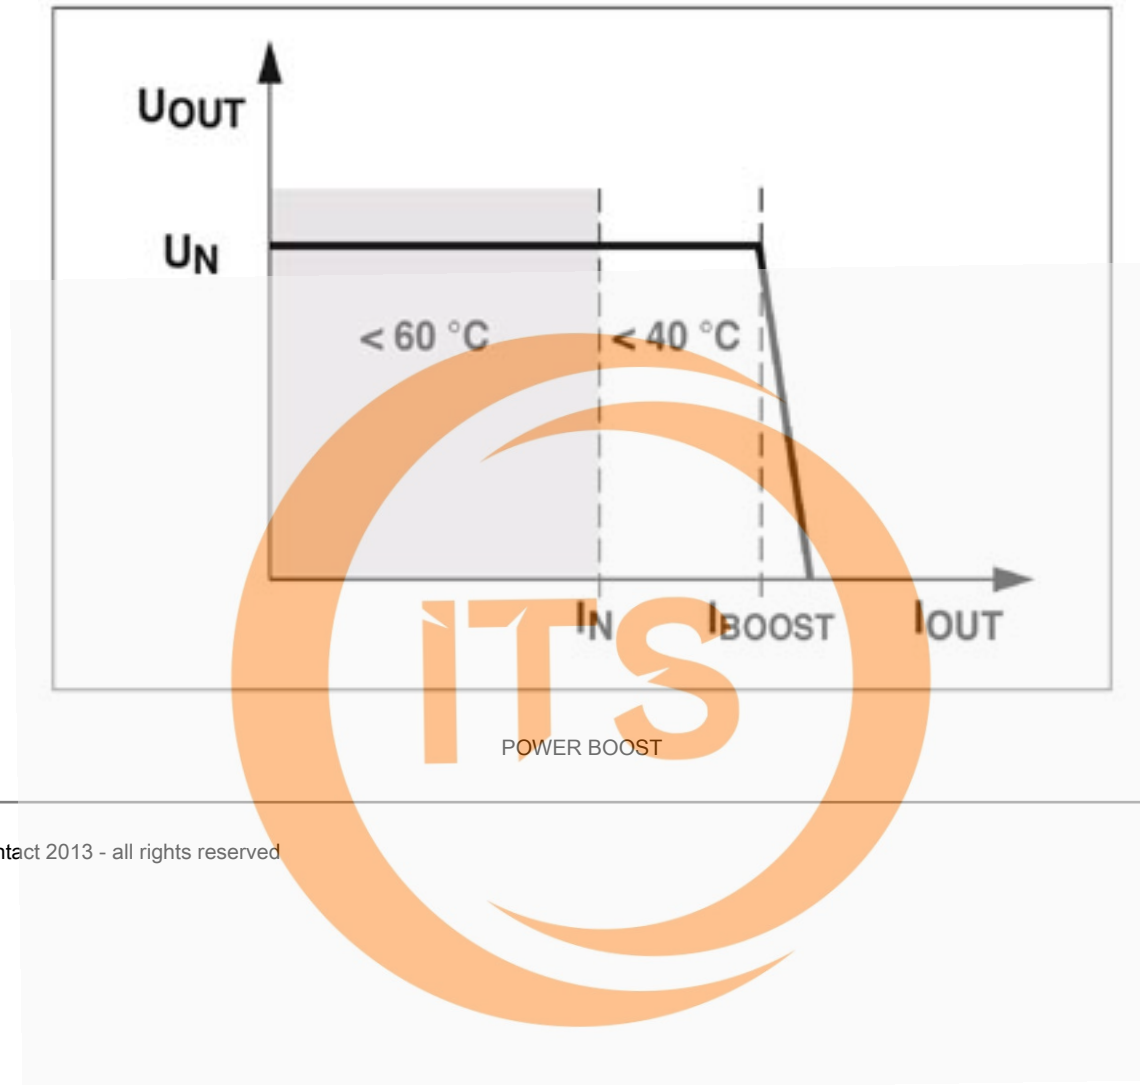

© Phoenix Contact 2013 - all rights reserved