




RECESSED MOUNTED CEILING LUMINAIRE
FOR PASSAGE WAYS, ACCOMMODATION AREAS
AND CORRIDORS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel, powder coated white (RAL9016)
Diffuser	Opal polycarbonate, impact-proof
Mounting	4 mounting holes, Ø 5.2 mm
Cable entry	4 inlets for cables max. Ø 13 mm
Protection class	IP30 / IP44 in conjunction with ceiling
Voltage	220-240 V AC
Frequency	50-60 Hz

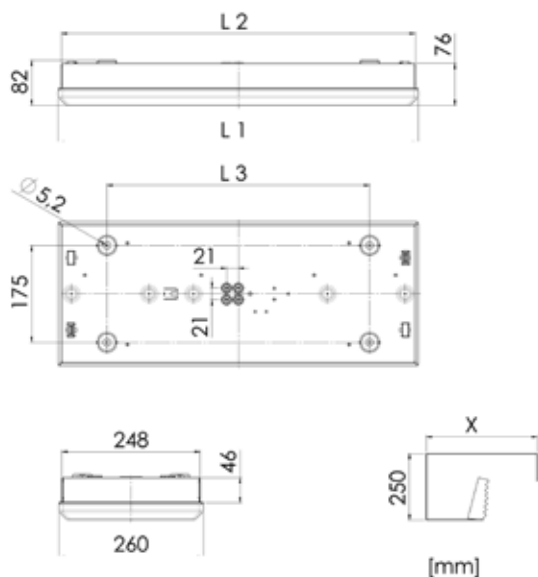

DE16S	5111008610-xxx
DE16L	5111008710-xxx
Light source	Linear LP LED modules
Wattage	Max. 20 W / max. 40 W
CCT (color)	3,000 K or 4,000 K
Luminous flux	DE16S: 1,500 lm DE16L: 3,100 lm
CRI	≥ 80
Weight	3.1 kg (DE16S) 5.5 kg (DE16L)

FLUORESCENT SOLUTION

DE16 2x 18 W	5111000100-046
DE16 2x 36 W	5111000800-023
Light source	T8 fluorescent tubes (not included)
Wattage	2x 18 W 2x 36 W
Lamp base	G13
Weight	3.1 kg (2x 18 W) 5.5 kg (2x 36 W)

SPARE PARTS

DE16S cover	7112000600
DE16L cover	7112000700

★ EXTRAS

- > 120 V AC execution
- > 24 V DC execution
- > Dimmable
- > Emergency battery back-up
- > Different fitting systems

TYPE	L1	L2	L3	X
DE16S	648	634	475	635
DE16L	1260	1244	950	1245