


## GTC-520F Series Single Channel Explosion Proof Type Gas Detector Receiver

| Usable in explosion hazardous area with flame proof structure | Easy installation with a wall mount type | Gas concentration display with 4-digit & Bar-graph (32 segment, 3-color LED) | 3-color display according to alarm stages (Green, Yellow, Red) | 3-stage alarm, 1-trouble LED display and relay contact output | Easy configuration of monitoring system with RS-485 Modbus isolated serial data communication(Optional) | Programmable alarm setting (Level, Time delay) | Peak hold | Self diagnosis |

### IMAGE



### DIMENSION (Unit : mm)

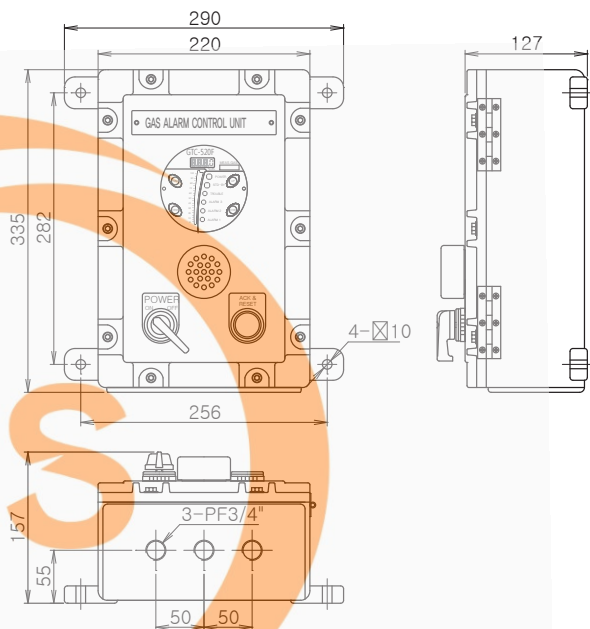

### ACCESSORIES



RS-485 module

### SPECIFICATION

※ Specifications are subject to be changed without prior notice.

EXPLOSION PROOF TYPE TYPE GAS DETECTOR RECEIVER GTC-520F SERIES					
	Model	GTC-520F			
Operation display	6-LED (Power, 3-stage alarm, Trouble, Stand-by)				
Measuring display	4-Digit FND & Bar-graph				
Measuring range	1-9999(programmable) / %LEL, ppm, %Vol				
Alarm display	Visual 3-stage alarm, Trouble LED		Audible : buzzer		
Alarm output signal	3-Stage Alarm, Trouble / AC250V 5A relay contact (SPDT)		Shut-off valve control signal (DC 12V)		
Alarm level set	Programmable within detection range				
Input signal	4-20mA DC (2-wire or 3-wire)				
Output signal	4-20mA DC		RS-485 Communication Modbus(option)		
Reset signal	Reset switch and remote control				
Program set mode	Alarm value (1, 2, 3 alarm)	Alarm time (instant & delay) 1-30min	Alarm dead band	Relay output on/off	
Operating temperature	-20℃ ~ +50℃				
Operating humidity	5-99%RH(non-condensing)				
Dimensions	290(W) x 347(H) x 137(D)mm				
Weight	12kg				
CERTIFICATION					
KCs	Ex d IIB+H2 T6				