


Tyco DHM-5B

Deckhead Mounting

INFORMATION SHEET

DESCRIPTION

The Deckhead Mounting is used when detectors are fitted in environments that can adversely affect the base terminals eg. particularly damp or dirty. It can be used with Tyco 600/800 Series detectors with 5B or 5BI bases and also with the Simplex range of detectors. Only detectors suitable for the environment should be used - consult bulletin GPBD0018. The Deckhead Mounting is secured to a suitable surface that is flat over the area of the underside of the Deckhead, using two 4.2 dia. countersunk screws at 144mm fixing centres. Two pan head 4.2 x 25mm (8-32x1") screws are supplied for fixing the detector base. When Tyco 600/800 Series detectors are to be used, the Deckhead Mounting is aligned so that the arrow which is embossed in the bottom is in line with the direction required for visual inspection of the detector LED. Where Simplex detectors are used, the LED location is at 90 degrees to the arrow.

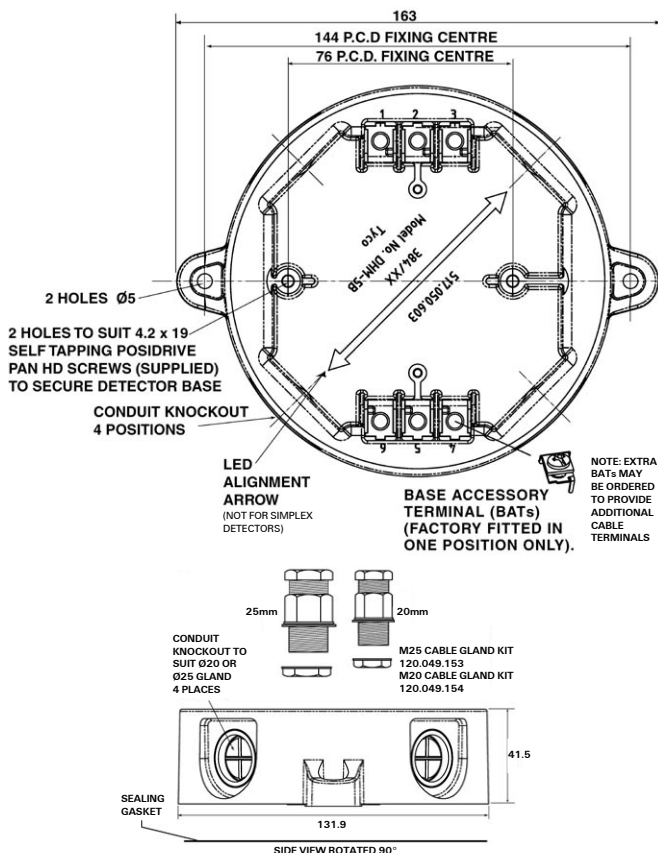

SPECIFICATIONS

Mechanical

Overall Dimensions:

Height	41.5mm
Width	163mm
Weight	200g

Material 20% glass filled P.B.T.

Part Numbers

DHM-5B	517.050.603
M20 Gland	120.049.154
M25 Gland	120.049.153
Base Accessory	517.050.612
Terminal Kit (pack of 10)	

Environmental

Ambient Temperature	-25°C to +70°C
Storage Temperature	-30°C to +75°C
Relative Humidity	up to 95% (non cond.)
Ingress Protection	IP55 (interface of 5B Base & DHM-5B)

The Deckhead Mounting comprises:

- Housing having 4x 20/25mm breakouts for conduit connection
- Two 4.2 x 25mm long, self tapping posidrive pan head screws to secure the detector base
- Sealing gasket

tyco / Safety
Products

www.tycosafetyproducts-anz.com

Tyco Safety Products, a division of Tyco Australia Pty Limited A.B.N. 80 008 399 004, reserve the right to alter specifications without notice, in line with Tyco's policy of continuing product improvement.