



HIGH EFFICIENT, STAINLESS STEEL LED FLOODLIGHT FOR DECKS AND HOLDS

|                         |                                                                                        |
|-------------------------|----------------------------------------------------------------------------------------|
| <b>Design</b>           | According to rules of maritime classification societies and relevant standards         |
| <b>Housing</b>          | Stainless steel, 1.4404 (AISI 316L), seamless deep drawn powder coated white (RAL9016) |
| <b>Safety pane</b>      | Tempered glass, DIN 12150, partially lacquered                                         |
| <b>Mounting</b>         | Stainless steel bracket, adjustable                                                    |
| <b>Cable entry</b>      | Exterior connection box, cable gland M20                                               |
| <b>Protection class</b> | IP67                                                                                   |
| <b>Weight</b>           | 8.7 kg                                                                                 |
| <b>Light source</b>     | 3 × LED array                                                                          |
| <b>Wattage</b>          | 3 × 25 W                                                                               |
| <b>CCT (color)</b>      | 5,700 K                                                                                |
| <b>Luminous flux</b>    | 8,000 lm                                                                               |
| <b>CRI</b>              | ≥ 80                                                                                   |
| <b>Voltage</b>          | 110–240 V AC                                                                           |
| <b>Frequency</b>        | 50–60 Hz                                                                               |

## PART NO.

|                |                |
|----------------|----------------|
| ST76 L 3 × 22° | 5101005720-001 |
| ST76 L 3 × 37° | 5101005720-000 |
| ST76 L 3 × 52° | 5101005720-002 |
| ST76 L 3 × 91° | 5101005720-015 |


## SPARE PARTS

## PART NO.

|                   |            |
|-------------------|------------|
| Cover with frame  | 7902003500 |
| Bracket           | 7501000100 |
| Reflector kit 22° | 7901003400 |
| Reflector kit 37° | 7901003500 |
| Reflector kit 52° | 7901003600 |
| Reflector kit 91° | 7901003700 |

## ★ EXTRAS

- > 24 V DC execution
- > Different cable glands
- > Reflectors with different beam angles can be combined
- > Different color temperatures

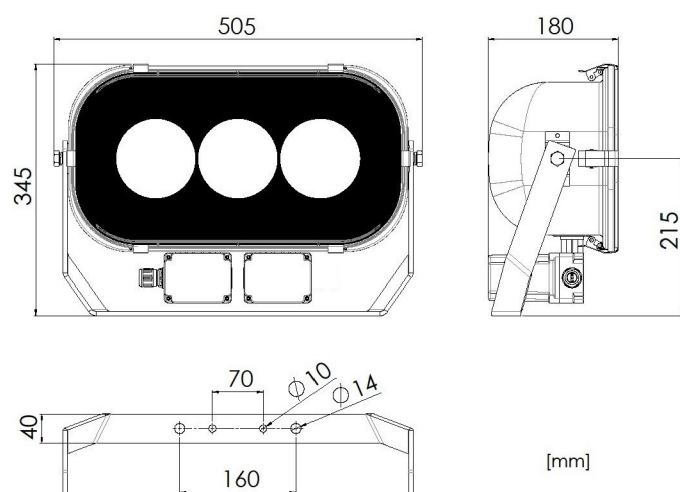

[mm]



LIGHTPARTNER LICHTSYSTEME GMBH & CO. KG  
AM MOHRENSHOF 7 · 28277 BREMEN · GERMANY  
+49 (0)421-87 195-0 · SALES@LIGHTPARTNER.DE

Technical modification reserved without prior notice

Find our complete  
digital catalogue here:

