

3005020022

## ETB-5

Central Panel Mounted This product has been replaced by Phontech CIS Talk-Back System





This product will be replaced by the equivalent Phontech solution, but Zenitel will honor prior commitments given to the market. Therefore, we will continue to provide expansion and spare-part service for this product.



### Description

- ✓ Master station with 5 lines selection
- ✓ All Call facility
- ✓ Monitor-speaker / microphone
- ✓ Connector for gooseneck or handheld microphone
- ✓ Dimable memory light
- ✓ Line buttons with memory light
- ✓ Buzzer indication of incoming calls
- ✓ Step volume control
- ✓ Call signal
- ✓ Output for extra signal device all lines
- ✓ 24V DC power supply

### Technical Dimensions

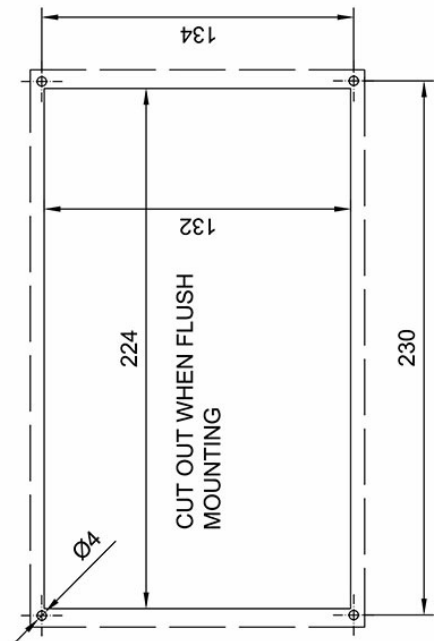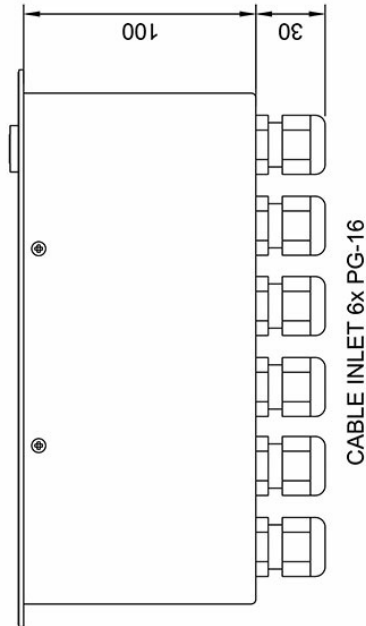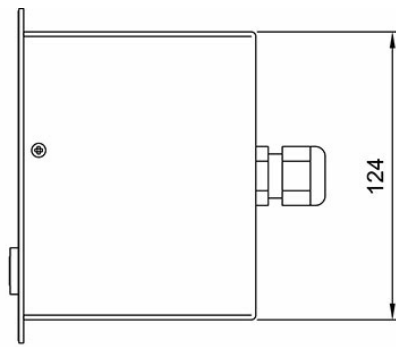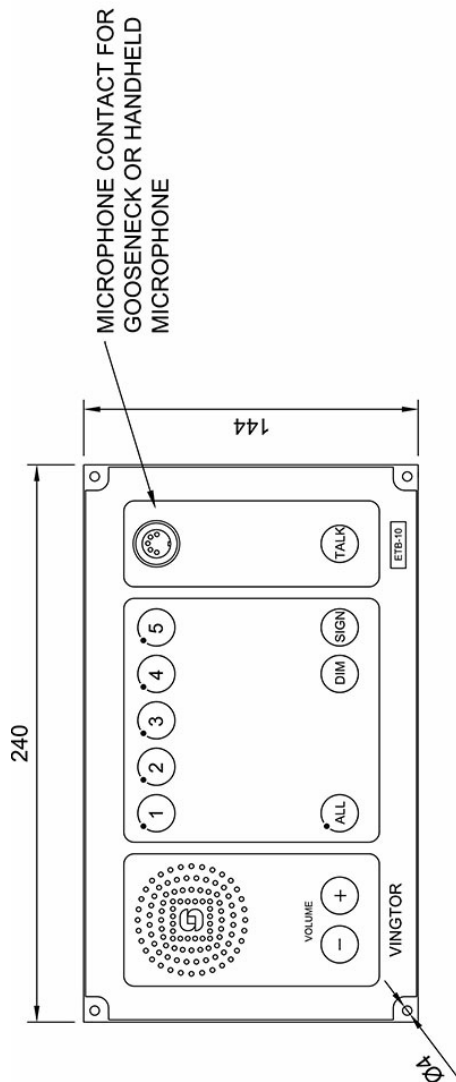

# Specifications

## GENERAL

Material / finish	Aluminium / black
Mounting	Flush with 4 x 4 mm screws
Terminals	Plugable screw terminals for cable max. 2.5 mm <sup>2</sup>
Cable gland	6 x PG-16
IP rating	IP-22
Dimensions (mm)	240W x 144H x 130D (with glands)
Cut-out dimensions	224 x 132 mm
Weight	Approx. 1.6 kg
Microphone input	Contact for handheld and gooseneck -microphone
Switches	Push-button type with LED indication
Power supply	24 - 32 VDC
Max. current consumption	1A
Output power	15 W RMS
Frequency range	200 Hz - 8 KHz (-3 dB)
Temperature operating	-15 to +55 °C

## Accessories



### WBOKS

Wall Mounted Backbox for ETB-5/10 and CTB-10/20 This product has been replaced by Phontech CIS Talk-Back System



### ETC-1-TB

Hand Microphone



### MB-30G

Gooseneck Microphone

3005020033

**MB-30G**

Gooseneck Microphone

**EN54**

EN 54 Certified



ICX-AlphaCom




Exigo

## Description

- ✓ Electret Gooseneck Microphone
- ✓ 5-pin DIN plug
- ✓ For use in Public Address and Talk-Back Systems
- ✓ For correct operation and performance speaking distance approximate 2cm.

## Technical Dimensions

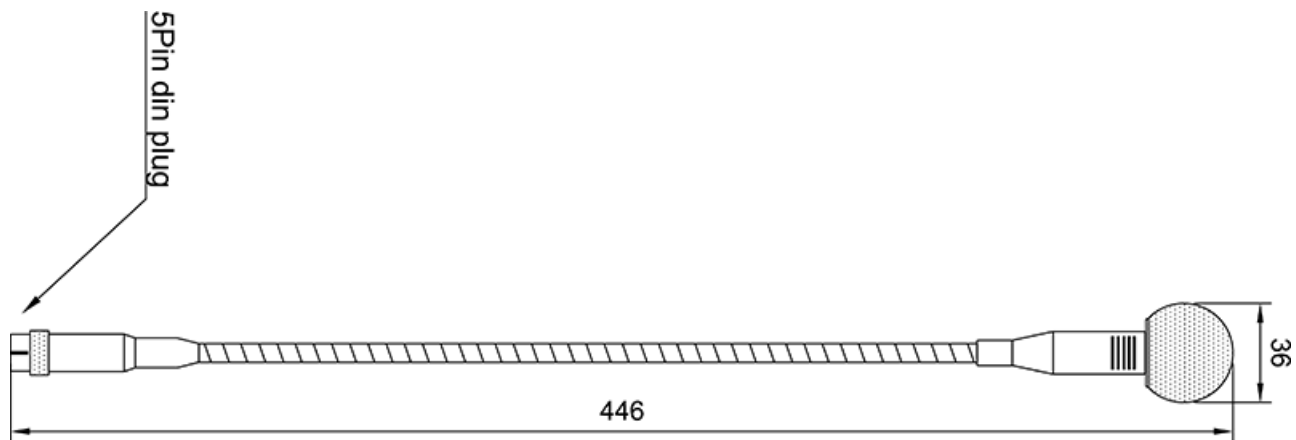

# Specifications

## GENERAL

Manufacturer	Paso
Type	Electret
Art.no	MB-30G
Impedance	680 ohm
Freq.response	100 - 20000 Hz
Sensitivity	4mv/Pa
Supply	1.1-9 V
Front rear ratio	10 dB
Length	446 mm
Plug	5 pole DIN
Windscreen	Detachable sponge windscreen
Weight	0.1 kg
IP Rating	IP-32
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

## Used With



### ECPIR-3P

Exigo Access Panel /  
Turbine Intercom



### ECPIR-P

Exigo Call Panel, PTT  
Button



### SPA-M6-V2



### SPA-M6-D



### SPA-M1-V2



### SPA-M1-D



### CTB-10

Control Unit This product  
has been replaced by  
Phontech CIS Talk-Back  
System



### CTB-20

Control Unit This product  
has been replaced by  
Phontech CIS Talk-Back  
System



### ETB-5

Central Panel Mounted This  
product has been replaced  
by Phontech CIS Talk-Back  
System



### ETB-10

Central, Panel Mounted  
This product has been  
replaced by Phontech CIS  
Talk-Back System



### ETB-10A

Central incl. All-call 10 lines  
panel mounted This product  
has been replaced by  
Phontech CIS Talk-Back  
System



### ETB-100

Central, Panel Mounted  
This product has been  
replaced by Phontech CIS  
Talk-Back System



### ETB-100A

Central panel mounted 10  
lines This product has been  
replaced by Phontech CIS  
Talk-Back System