



HDS 801 D

Mobile hot water high-pressure cleaner with combustion engine for the universal use where no power supply is available.



1 Maximum independence

- Efficient four-stroke gasoline or diesel engine with reversing starter.
- The right motor for the right job.

2 For the toughest jobs

- Sturdy tubular steel frame protects all components.
- Crane hook for use in the rental business and in construction, agriculture and forestry.



HDS 801 D

- Hot water compact unit
- Safety valve protects the unit against overpressure
- Sturdy pipe frame for handling with crane

Technical data

Order no.	1.210-104.0	
EAN code	4039784729971	
Pressure	bar / MPa	140 / 14
Flow rate	l/h	600
Temperature (for supply 12 °C)	°C	max. 80
Consumption of heating oil or gas at full load	kg/h	3.7
Motor type	15 LD 225 / diesel	
Motor manufacturer	Lombardini	
Engine rating	kW / hp	3.5 / 4.8
Number of simultaneous users	1	
Portability	medium	
Weight	kg	130
Dimensions (L × W × H)	mm	1168 × 862 × 767

Equipment

Spray gun	Extended high-pressure trigger gun	
High-pressure hose	m	10
Spray lance	mm	1050
Triple nozzle (0° / 25° / 40°)	Manual	
Cage protective frame	■	
Anti-twist system	-	
Electro start	-	
Servo control	-	
sturdy tubular steel frame for handling with crane	■	

■ Included in the scope of supply.

HDS 801 D

1.210-104.0

KÄRCHER


		Order no.	Flow rate				Price	Description	
Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)									
Extended Easy Press trigger gun	1	4.775-529.0						Extended easy press high-pressure trigger gun for high-pressure hoses with rotating connector.	■
Trigger guns									
High-end HP trigger gun	2	4.775-823.0						High-end spray guns with optimised flow. Small pressure losses also with water volumes up to 2500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best conditions for use in the food sector and in industry. Connector for HP hoses M 22 x 1.5.	□
Quick connect									
Quick coupling	3	6.401-458.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Male coupling	4	6.401-459.0						Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.	□

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER



1



2

		Order no.	Max. working pressure	Length			Price	Description	
Spray lance									
550 mm lance, non-rotatable	1	4.760-665.0		550 mm				550 mm stainless steel lance. With manual coupling. Non-rotatable.	■
250 mm lance, non-rotatable	2	4.760-667.0		250 mm				250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Angular spray lance									
Spray lance for toilets and rain gutters	3	4.760-073.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance									
Flexible lance	4	6.394-654.0	210 bar	1050 mm				1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
Telescopic spray lance									
Strap for telescopic spray pipe	5	6.373-987.0						Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□
Gutter cleaner									
Gutter cleaning lance	6	2.642-305.0						The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle	1	4.767-149.0	300 bar	38				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5.	■
Dirt blaster, large									
Dirt blaster	2	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	□
Triple nozzle, touchless changeover									
Triple nozzle	3	4.767-112.0		40				Triple nozzle with high-pressure pencil jet (25°) and low-pressure fan jet (40°). Fast and easy jet changeover by turning the nozzle.	□

■ Included in the scope of supply. □ Available accessories.

Page 2

1.Object

page6152296391516_dd_1_272x272px.jpg wurde anstatt PAGE6152296391516_HP_hose_AVS_conn_dd_1_272x272px.JPG platziert.

2.Object

page6152296391517_dd_1_272x272px.jpg wurde anstatt PAGE6152296391517_dd_1_272x272px.JPG platziert.

3.Object

page6152296388886_dd_1_272x272px.jpg wurde anstatt



2



12

		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard								
High-pressure hose, 10 m, ID 6, AVS trigger gun connector	1	6.391-238.0	DN 6	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.	■
Standard with unions on both sides								
High-pressure hose, 10 m, ID 8, 315 bar, extension	2	6.391-342.0	DN 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
High-pressure hose, 15 m, ID 8, 315 bar, including rotary coupling	3	6.390-010.0	DN 8	315 bar	15 m		With screw connections on both sides, M 22 x 1.5 with bend protection.	□
High-pressure hose, 20 m, ID 8, 315 bar, extension piece	4	6.390-031.0	DN 8	315 bar	20 m		Screw connections at both ends, M 22 x 1.5, with kink protection.	□
High-pressure hose, 30 m, ID 8, incl. rotary coupling	5	6.390-293.0	DN 8	315 bar	30 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
High-pressure hose, 15 m, ID 10, 220 bar, extension piece	6	6.390-023.0	DN 10	220 bar	15 m		Connectors at both ends, M 22 x 1.5, with kink protection.	□
Longlife 400								
Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5	7	6.391-882.0	DN 6	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	□
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	8	6.391-351.0	DN 8	400 bar	10 m		With patented AVS connection in the trigger gun (rotatable) and hand screw connection, M 22 x 1.5 with kink protection. With double steel reinforcement.	□
Longlife 400 with unions on both sides								
High pressure hose ID 6, 10 m, including rotary coupling	9	6.391-883.0	DN 6	400 bar	10 m		With rotary coupling, 2 x M 22 x 1.5	□
High-pressure hose 1.5 m, ID 8, including connectors	10	6.390-178.0	DN 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling	11	6.388-083.0	DN 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends, M 22 x 1.5, with kink protection.	□
High-pressure hose Longlife 400, 10 m, ID 8, extension	12	6.391-354.0	DN 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	□
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	13	6.389-709.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	□
High-pressure hose Longlife 400, 20 m, ID 8, extension	14	6.390-027.0	DN 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	□
High-pressure hose Longlife 400, 30 m, ID 8, including rotary coupling	15	6.390-294.0	DN 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	□
Food industry version								
High-pressure hose, 15 m, ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	16	6.391-654.0	DN 6	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	□
Food industry version with unions on both sides								
High-pressure hose, 10 m, DN 8, suitable for the food industry, extension piece	17	6.389-479.0	DN 8	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	□
High-pressure hose, 20 m, ID 8, suitable for food industry, extension piece	18	6.389-581.0	DN 8	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	□

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER



		Order no.	ID	Max. working pressure	Length		Price	Description	
Longlife food design									
High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection	19	6.391-888.0	DN 6	400 bar	15 m			Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>
Longlife food design with screw connections at both ends									
High pressure hose food ID 8, 10 m	20	6.391-864.0	DN 8	400 bar	10 m			Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	<input type="checkbox"/>
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	21	6.391-887.0	DN 8	400 bar	20 m				<input type="checkbox"/>
Special hoses									
High-pressure hose, 1.5 m, ID 8, incl. connection parts, curved outflow	22	6.388-886.0	DN 8	400 bar	1.5 m			Connection hose in longlife quality with 2x M22 x 1.5, with angled connection on one side.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

Page 2

5.Object page615273noz-
zleunion_det_dd_1_272x-
272px.jpg wurde anstatt
PAGE615273Chemical_
injektor_d0_10_272x-
272px.JPG plziert.

6.Object
page6152734769001_
std_1_272x272px.jpg
wurde anstatt
PAGE6152734769011_
std_01_272x272px.JPG
plziert.

12.Object
page6152734111030_
std_1_272x272px.jpg
wurde anstatt
PAGE6152734424004_
std_01_272x272px.JPG
plziert.



2, 5

		Order no.	Nozzle size				Price	Description	
HP nozzle spray angle 0°									
Power nozzle	1	2.884-533.0	40					High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 15°									
Power nozzle	2	2.883-388.0	40					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 25°									
Power nozzle	3	2.883-805.0	38					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
Chemical nozzle	4	2.884-521.0	250					Brass power nozzle for low pressure operation and cleaning agent suction.	<input type="checkbox"/>
Power nozzle spray angle 40°									
Power nozzle	5	2.884-522.0	40					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER



		Order no.					Price	Description	
Nozzle union									
Nozzle connector	1	5.401-210.0						For protecting and connecting Kärcher power nozzles to spray lances (M 18 x 1.5 IG).	<input type="checkbox"/>
Spacer (including nozzle union)									
Spacer (includes nozzle screws)	2	5.394-294.0						Guarantees constant safety clearance, e.g. for tyres and bodywork. Helps prevent damage to sensitive surfaces. Mounts directly to lance.	<input type="checkbox"/>
Cleaning agent injector									
Cleaning agent injector for high pressure (without nozzle)	3	3.637-170.0						Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Cleaning agent injector for high and low pressure (without nozzles)	4	3.637-001.0						Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 4.637-033.0									
Nozzle kit 500-700 l/h	5	4.769-009.0						For HDS 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Nozzle kit 500-700 l/h	6	4.769-046.0							<input type="checkbox"/>
Nozzle insert with order no. 4.637-032.0									
Nozzle insert up to 1,100 l/h - high pressure	7	4.769-003.0						Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Nozzle insert up to 1,100 l/h - low pressure	8	4.769-001.0						For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Rotary coupling									
Rotary coupling	9	4.401-091.0						Reliably prevents twisting of HP hoses. Connection M 22 x 1.5 m. Handle protection	<input type="checkbox"/>
Coupling									
Coupler -2 x M22 x 1,5	10	4.403-002.0						For overriding the dismantled heating coil for cleaning alternative: 4.111-029.0 adapter 1 - hose old / hose new	<input type="checkbox"/>
Connector									
Nozzle screws / screw socket	11	4.402-022.0						Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapters									
Sealing cone complete	12	4.424-004.0						In order to install high-pressure hose with male coupling on thread with M22 x 1.5 Alternative: 4.111-032.0 Adapter 4 - Device new / Hose old Swivel	<input type="checkbox"/>
EASY!Lock adapter									
Adapter 1 M22AG-TR22AG	13	4.111-029.0						Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	14	4.111-030.0						Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	15	4.111-031.0						Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 4 TR22IG-D11	16	4.111-032.0						Adapter 4 to connect the new gun with the old swivel hose	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	17	4.111-033.0						Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	18	4.111-034.0						Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	19	4.111-035.0						Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	20	4.111-036.0						Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

Page 2

5.Object

page6152682642911_


std_1_272x272px.jpg

wurde ansta

615268FR_30_

dd_3_272x272px.JPG pla-

ziert. 1-2



12-13

		Order no.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Pipe cleaning hose, ID 6								
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	1	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high-pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	2	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	3	6.390-030.0	250 bar				The 20 m pipe cleaning hose is a highly flexible high-pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning nozzle								
Pipe cleaning dirt blaster D21/040	4	4.765-001.0		40	21 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Pipe cleaning dirt blaster D30/040	5	4.765-004.0		40	30 mm			<input type="checkbox"/>
Pipe cleaning nozzle	6	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	7	5.763-016.0		60	16 mm			<input type="checkbox"/>
	8	5.763-020.0		65	16 mm			<input type="checkbox"/>
	9	5.763-017.0		50	30 mm		Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 x 30° backwards, diameter 30 mm.)	<input type="checkbox"/>
	10	5.763-021.0		70	30 mm		30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
Drum and tank cleaning								
Add-on kit mud sucker	11	2.641-798.0					For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	<input type="checkbox"/>
HKF 50 spray head, brass								
HKF 50 spray head, brass	12	3.631-039.0					Depth of immersion 850 mm. Interior cleaning head for barrels and containers with bungholes of 50 mm and more. Can be directly connected to the high-pressure cleaner. Electric motor drive. Operation is possible both vertically and horizontally	<input type="checkbox"/>
	13	3.631-058.0					Depth of immersion 150 mm. Interior cleaning head for barrels and containers with bungholes of 50 mm and more. Can be directly connected to the high-pressure cleaner. Electric motor drive. Operation is possible both vertically and horizontally	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER


		Order no.	Flow rate	Nozzle size	Diameter	Price	Description	
Hard Surface Cleaner FRV 30								
FRV 30 surface cleaner	1	2.642-999.0					With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
Rubber lip for FRV 30	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
FR 30 Me surface cleaner								
Hard surface cleaner FR 30 Me	4	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Machine-specific nozzle kits for FR								
Nozzle kit for surface cleaners	5	2.640-401.0	500 - 650 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 040 - for FRV	6	2.642-431.0		40			Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
FRV 30 Me surface cleaner								
FRV 30 Me	7	2.642-911.0					Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	<input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	8	4.441-040.0					5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D 1.210-104.0

KÄRCHER



1




3

		Order no.	Flow rate				Price	Description	
Cup foam lance									
Cup foam lance	1	6.394-668.0	max. 1200 l/h					Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for foam lance	2	6.414-954.0						Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 6.394-668)	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	3	2.640-691.0						HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	4	2.640-870.0	500 - 600 l/h					Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle attachment kit	5	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

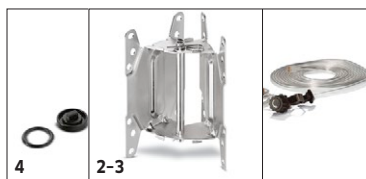

		Order no.	Length				Price	Description	
Automatic, self-winding hose reels for wall mounting									
Add-on kit hose reel stainless steel K/P	1	6.391-520.0	20 m						<input type="checkbox"/>
Powder-coated swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	3	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

Page 2

5.Object

page6152724730102_

dd_1_272x272px.jpg

wurde anstatt

PAGE6152722637691_

std_1_272x272px.JPG

plaziert. 1-2

6.Object

page6152724440038_

std_1_272x272px.jpg

wurde anstatt

PAGE6152724730102_

dd_1_272x272px.JPG pla-

ziert.



3

		Order no.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle kits for wet jet unit									
Nozzle kit for wet jet unit 040	3	2.637-900.0	40					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D

1.210-104.0

KÄRCHER


		Order no.					Price	Description	
Geka coupling									
Geka connector with hose barb, R 1/2"	1	6.388-461.0						with hose liner	<input type="checkbox"/>
Geka connector with hose barb, R 3/4"	2	6.388-455.0							<input type="checkbox"/>
Geka connector with inner thread, R 3/4"	3	6.388-473.0						with female thread	<input type="checkbox"/>
Suction filter									
Water suction filter	4	6.414-956.0						Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	<input type="checkbox"/>
Suction filter with check valve	5	4.730-012.0						Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Water fine filter									
Universal water fine filter, 25 µm	6	2.637-020.0						Fine-mesh water filter, 25 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water fine filter, 100 µm, R 3/4"	7	2.637-691.0						Fine-mesh water filter, 100 µm, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4".	<input type="checkbox"/>
Water fine filter, with adapter	8	4.730-102.0						Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose									
Water supply hose	9	4.440-038.0						NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	10	4.440-207.0						NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
Backflow check valve									
Backflow preventer	11	2.641-374.0						To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D 1.210-104.0

KÄRCHER



Page 1

2.Object

page6152354113002_std_2_272x272px.jpg wurde anstatt PAGE6152354113002_std_2_272x272px.JPG platziert.¹



3.Object page615235rwb_2002_dd_4_272x272px.jpg wurde anstatt PAGE615235RWB_2002_dd_4_272x272px.JPG platziert.

		Order no.	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush	1	4.762-016.0						For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 x 1.5	<input type="checkbox"/>
	2	4.762-497.0						The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for > 800 l/h machines	3	4.762-559.0	900 - 1300 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>
	4	4.762-562.0	900 - 1300 l/h						<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

HDS 801 D, 1.210-104.0, 2021-04-21