

8040/1280X-54C06SXXX-23D01SA05 Art. No. 130898



- Flexible: Modular design and three sizes make customer-specific versions possible
- Lightweight enclosure made of glass fibre reinforced polyester resin (GRP), suitable for the marine industry and offshore applications

MY R. STAHL 8040B



With the R. STAHL Series 8040 control device system, you can get a clear overview of the control devices. The three combinable sizes and the modular design offer flexibility. You can choose from one standard version and customised variants.

Technical Data

Explosion Protection

Area of application	IECEX European Union (ATEX)
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 06.0025
IECEX gas explosion protection	Ex db eb IIC T6 / T5 Gb
IECEX dust certificate	IECEX PTB 06.0025
IECEX dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
ATEX gas certificate	PTB 01 ATEX 1105
ATEX gas explosion protection	II 2 G Ex db eb IIC T6 / T5 Gb
ATEX dust certificate	PTB 01 ATEX 1105
ATEX dust explosion protection	II 2 D Ex tb IIIC T80 °C / T95 °C Db
Certificates	ATEX (PTB), Brazil (ULB), Canada (UL), China (NEPSI), IECEX (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (UL)
Ship approval	DNVGL
Declaration of Conformity	ATEX (EUK), China (CCC)
Explosion protection note	Product label may vary. Series devices are labelled with ATEX and IECEX.

Electrical Data

Rated operational voltage AC	690 V
Rated operational current	10 A (T6)

Ambient Conditions

Ambient temperature	-60 °C ... +40 °C (T6) -60 °C ... +55 °C (T5)
Ambient temperature	-76 °F ... +104 °F (T6) -76 °F ... +131 °F (T5)

Mechanical Data

Degree of protection IP (IEC 60529)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Dark grey

Control and signalling devices**Control device system Series ConSig 8040**

8040/1280X-54C06SXXX-23D01SA05 Art. No. 130898

Mechanical Data


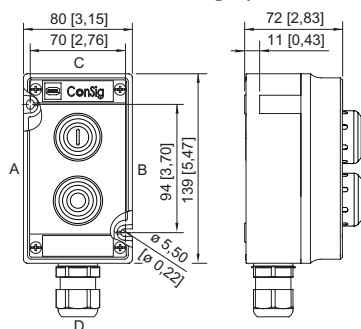
Silicone-free	No
Clamping range AWG	14 AWG
Connection cross-section max.	2.5 mm ²
Solid connection cross section	0.32 – 2.5 mm ²
Connection cross-section AWG single stranded	22 AWG ... 14 AWG
Finely stranded connection cross section	0.32 – 2.5 mm ²
Finely stranded connection cross-section AWG	22 AWG ... 14 AWG
Cover fixing type	With captive screws, M4 stainless steel screws
Width	80 mm
Width, inches	3.15 in
Height	139 mm
Height in inches	5.47 in
Depth	72 mm
Depth in inches	2.76 in
Seal	Silicone, foamed
Weight	540 g
Weight	1.19 lb

Mounting / Installation

Tightening torque of cover screw 1	1.4 Nm
Tightening torque of cover screw 1 lbf in	12.4 lbf in

Components

Installation position top	Indicator lamp bezel, All colours
Built-in element top	LED indicator lamp
Installation position bottom	Twin pushbutton, Red "0", green "I"
Built-in element bottom	Contact element NC/NO
Flange and plates	Without flange, without plates
Cable glands and entries	1 x M25 Ø 7 ... 17 mm
Entry type	Standard 8161, moulded material
Entry 1	1 x 8161/7-M25-1707-LT
Entry 1 type	Polyamide cable gland, black
Entry 1	M25 x 1.5
Entry 1 clamping range	7 – 17 mm
Entry 1 clamping range, inch	0.28 – 0.67 in
Metal entry possible 1	No

Control and signalling devices**Control device system Series ConSig 8040****STAHL****8040/1280X-54C06SXXX-23D01SA05 Art. No. 130898****Technical Drawings – Subject to Alterations****Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations**

ConSig 8040/12

Accessories**Indicator lamp bezel**

BG054	Art. No.
	Diameter 39 mm All colours Silicone-free: No
223123	

Twin pushbutton

BG023	Art. No.
	Black Front panel mounting Silicone-free: No
244639	

Spare Parts**Caps for BG054**

	Art. No.
	for indicator lamp, all colours packaged
248685	

Control and signalling devices**Control device system Series ConSig 8040****STAHL**

8040/1280X-54C06SXXX-23D01SA05 Art. No. 130898

Designation plates set for ASSY001, ASSY023**Art. No.**

The button label set contains nine labels
 6x blank disc without text in red, green, white, blue, yellow and black
 1x red label, text: STOP
 1x green label, text: START
 1x blue label, text: RESET

321791

Label holder**Art. No.**

Size 1, without insert disc, 1-line label
 for actuators Ø 39

223566



Size 2, without insert disc, 1- or 2-line label
 for actuators Ø 39

223567




Size 3, without insert disc, 1-, 2- or 3-line label
 for actuators Ø 39

223568

Special key**Art. No.**

for tightening plastic locking nut

169101

Tag label**Art. No.**

plain
 for attaching to enclosure 8040; moulded material;
 with paper insert strip

130673

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.