

Nexus 105/110/120 Sounder

High output sounders certified to EN54.

Connections are made to the base during the initial wiring phase which results in faster and more reliable installation. In addition, the head is fixed by quarter turn fasteners enabling faster installation and accurate seal compression for weatherproofing.


IP66 as standard means that Nexus can be installed in almost any location.

Features


- 105dB, 110dB and 120dB sound output variants
- Three alarm stages
- First-fix, wire to base technology
- IP66 rated
- Volume control for greater flexibility - 20dB
- 64 tones



Nexus 105

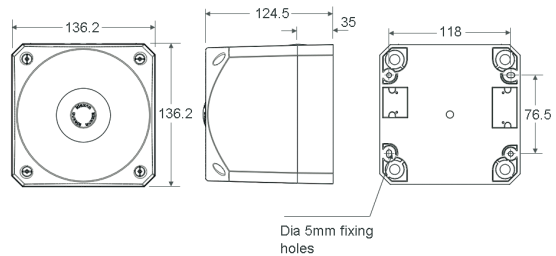

Nexus 110/120

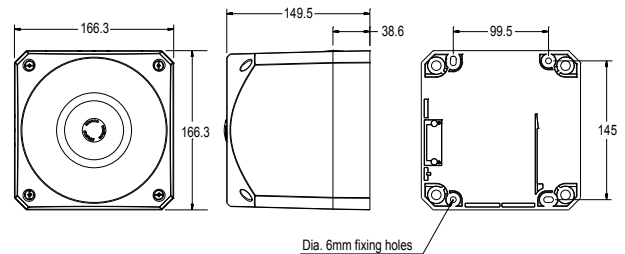

Specifications

Part No.	Description	Colours	Audibility at 1m	Tones	Voltage	Current (tone dependent)
PNS-0001	Nexus 105	Red	105dB (A)	64	10-60V DC	8-40mA
PNS-0013	Nexus 110	Red	110dB (A)	64	10-60V DC	10-50mA
PNS-0005	Nexus 120	Red	120dB (A)	64	10-60V DC	120-550mA

IP Rating: IP66 **Operating Temp:** -25°C to +70°C **Cable Entries:** 5 **Weight:** 105dB Sounder - 0.7kg; 110dB Sounder - 1.1Kg; 120dB Sounder - 1.8Kg
Compliance: EN54-3 Type B

klaxon
 Signalling Solutions