

Ø125mm Bulb Revolving Warning Lights

S125 Series


S125U Bulb Revolving Warning Light

Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S125U	DC12V	965mA	12V10W	T16x35 15S	9	CE	0.41kg	● R-Red
	DC24V	565mA	24V10W	T16x35 15S	10		0.41kg	● A-Amber
	AC110V	130mA	12V10W	T16x35 15S	9		0.65kg	● G-Green
	AC220V	65mA	12V10W	T16x35 15S	9		0.65kg	● B-Blue

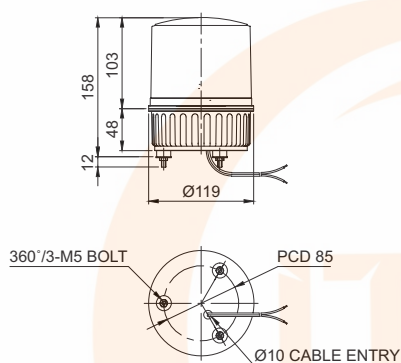
· Protection rating: IP44

※ CE Compliant: DC12V, DC24V

**S125U****Technical Diagram**

Units: mm

·S125U

**Wiring Instructions**

- External Power line - UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Customization

- 2 buzzer sound types: Both prolonged (beep, beep) and staccato(beep, beep, beep) buzzer output available
- Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount
Bracket
SWP125



Wall Mount
Bracket
SWM125

Ordering Specification

S125U	-	BZ	-	220	-	R
[Model number]		[Buzzer option]		[Voltage]		[Color]
S125U		(None)		12-DC12V		● R-Red
		- No buzzer		24-DC24V		● A-Amber
		BZ		110-AC110V		● G-Green
		- Built-in buzzer		220-AC220V		● B-Blue