


Lighting

LED tubular light fitting

STAHL

6036/1212-452-0371-11 Art. No. 274372

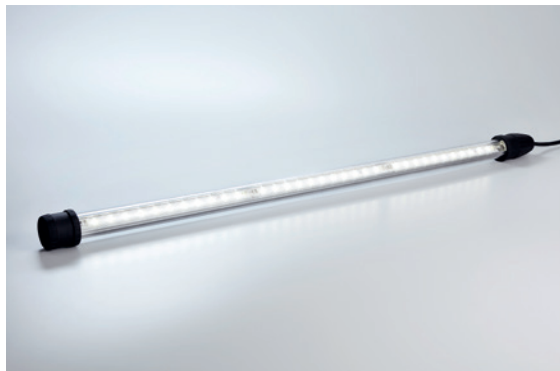

- Degree of protection IP66 and IP68
- Type of protection Ex d
- Vibration-resistant, lightweight, robust (impact strength rating of IK10) and maintenance-free
- Many light fittings can be connected to single miniature circuit breaker due to incredibly low start-up current

MY R. STAHL 6036A



The 6036 series compact LED tubular light fitting is ideal for general lighting applications and for use as machine lighting, even in relatively inaccessible places with very little space. This light boasts a long service life of up to 100,000 hours thanks to its use of energy-efficient LED technology, coupled with electronics that have been developed in-house by R. STAHL. Due to its robust construction, it can withstand extreme temperatures of between -55 °C and +60 °C.

Technical Data

Explosion Protection

Application range (zones)	1, 2, 21, 22
IECEEx gas certificate	IECEEx EPS 13.0027
IECEEx gas explosion protection	Ex db op is IIC T4 Gb
IECEEx dust certificate	IECEEx EPS 13.0027
IECEEx dust explosion protection	Ex tb IIIC T100 °C Db
ATEX gas certificate	EPS 13 ATEX 1 597
ATEX gas explosion protection	Ex II 2 G Ex db op is IIC T4 Gb
ATEX dust certificate	EPS 13 ATEX 1 597
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC T100 °C Db
Certificates and approvals	ATEX IECEEx ship approval (DNV GL)
Certificates	ATEX (BVIS), IECEEx (BVIS)

Electrical Data

Rated operational voltage DC	12 V
Frequency range	50 – 60 Hz

Lighting Data

Number of lamps	1
Lamp wattage	13 W
Lamp	Single-row LED
Light colour	Neutral white
Light distribution	with diffuser
Luminaire efficacy	104 lm/W
Luminous flux	1396 lm
Colour rendering	≥ 80
Colour temperature	5000 K

6036/1212-452-0371-11 Art. No. 274372

Lighting Data

Note Values apply to $T_a = +25\text{ °C}$

Ambient Conditions

Ambient temperature -40 °C ... +40 °C
Storage temperature -40 °C ... +70 °C


Mechanical Data

Version Size 1
Degree of protection (IP) IP66 / IP67
IP degree of protection (IEC 60598) IP66 / IP68 (10 m / 60 min)
Class II (double insulated)
Enclosure material Polycarbonate
Silicone-free content Silicone-free
Pipe material Polycarbonate
Type of connection cable (N)HXSLHXÖ-J 2x1.5 mm²
Cable length 10 m
Size 1
Width 54 mm
Height 54 mm
Length 444 mm
Diameter 54 mm
Impact strength (IEC 62262) IK10
Weight 1.3 kg
Weight 2.87 lb

Components

Ballast LED, CSS
Wire guard No

Technical Drawings – Subject to Alterations

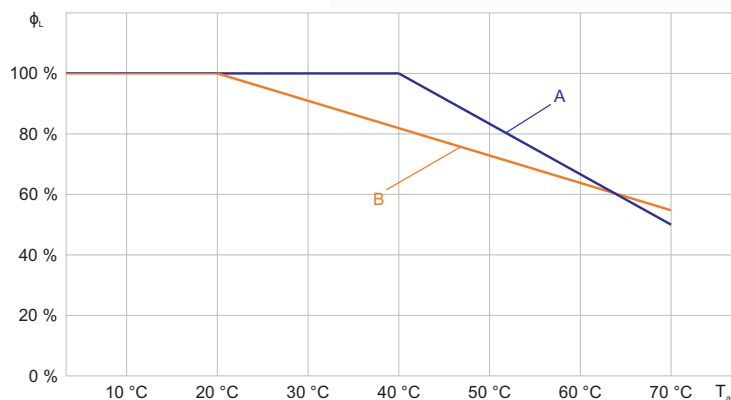


Luminous flux decline relative to ambient temperature

A: Size 1 (110 to 240 V)


B: Size 1 (24 to 48 V)

6036/1212-452-0371-11 Art. No. 274372

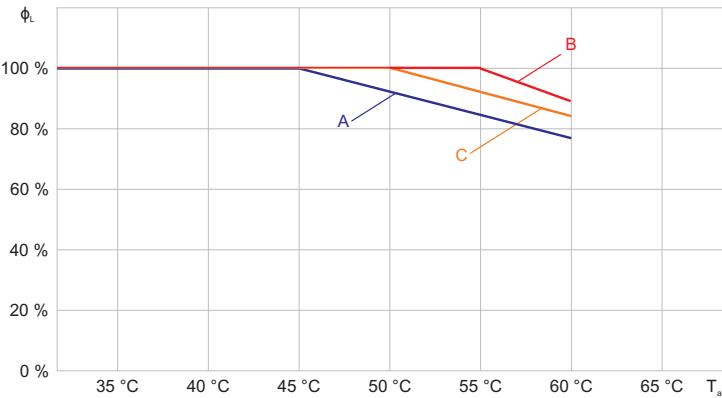


Luminous flux decline relative to ambient temperature
A: Size 2
B: Size 3
C: Size 4

Light Distribution Curves

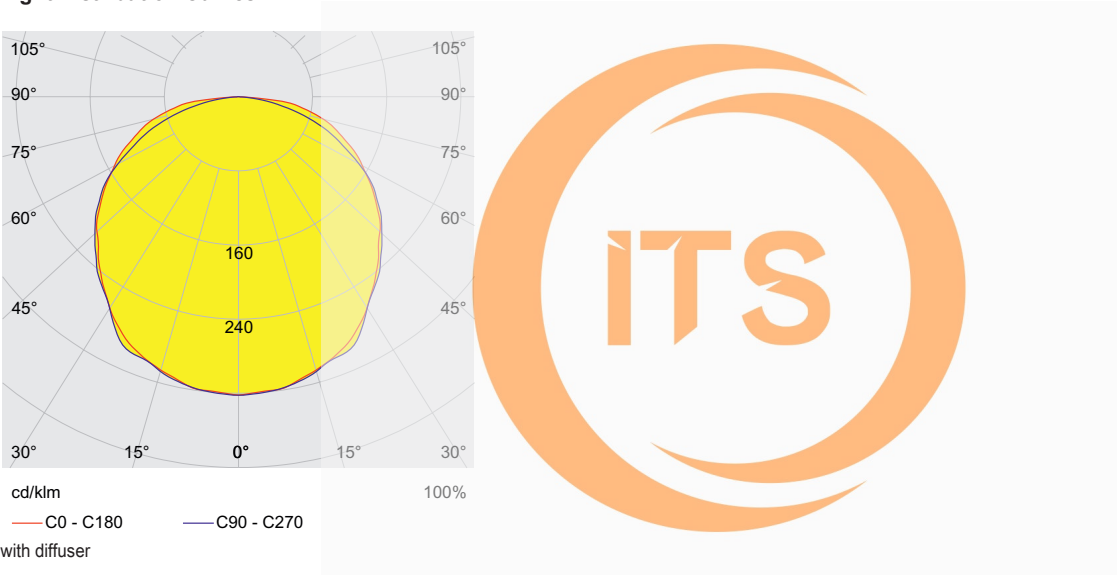


Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations


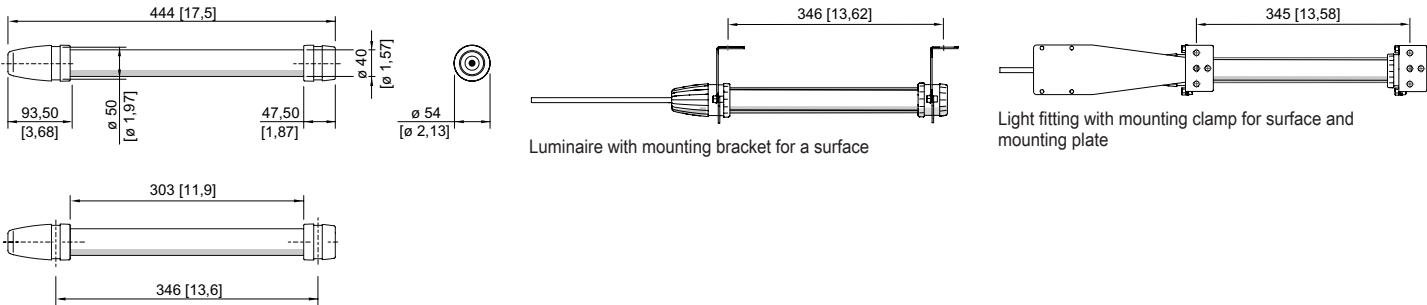


Design size 1



6036/1212-452-0371-11 Art. No. 274372

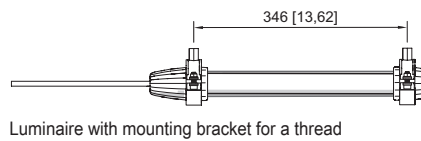


Luminaire with mounting bracket for a thread



Mounting bracket for a thread

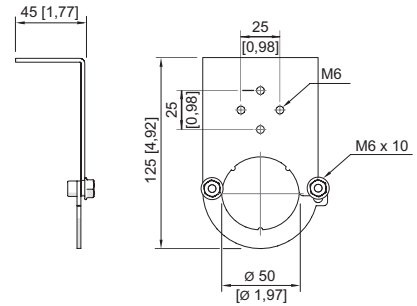

Mounting bracket for surfaces




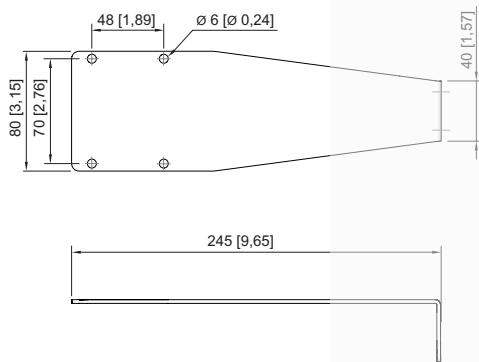


Mounting plate

Accessories

Plug		Art. No.
	8573/12-200 2-pole, 20 to 25 V, 50 / 60 Hz, 16 A	243197
	8573/12-210 2-pole, 20 to 25 V, DC, 16 A	243203
	8573/12-300 3-pole, 20 to 25 V, 50 / 60 Hz, 16 A	243190
	8573/12-312 3-pole, 40 to 50 V, 50 / 60 Hz, 16 A	243195
	8570/12-304-S-XX-X-XX-XXX 3-pole plug, 100 to 130 V AC, 50/60 Hz, 16 A	272896
	8570/12-306-S-XX-X-XX-XXX 3-pole plug, 200 to 250 V AC, 50 / 60 Hz, 16 A	272898

6036/1212-452-0371-11 Art. No. 274372

Mounting bracket		Art. No.
	Mounting bracket made of galvanised sheet steel to screw onto thread M8 or M10 (2 pieces)	227256
	Mounting bracket made of stainless steel V4A to screw onto thread M8 or M10 (2 pieces)	227257
	Double plastic mounting clamp for mounting on pipes with a diameter of 45 to 55 mm (screws and nuts made from stainless steel V2A) (2 pieces)	254932
	Set of mounting plate Art. no. 254494 and mounting bracket Art. no. 252940	248100
	Mounting bracket made of stainless steel V4A for fastening on surfaces (2 pieces)	252940
	Mounting bracket made from galvanised sheet steel (x 2 units); for design size 1	120535
	Mounting plate made of stainless steel V4A for terminal box Ex e Series 8010 (for example Art. No. 130724) for fastening on mounting bracket Art. No. 252940	254494
Mounting bracket and magnet		Art. No.
	Mounting bracket made from galvanised sheet steel with magnetic base (x 2 units); for design size 1	120536

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.