



DOWNLIGHT FOR ACCOMODATION AND PUBLIC AREAS

Design	According to rules of maritime classification societies and relevant standards
Housing	Galvanized steel
Decorative ring	Gold, chrome or colors in accordance with RAL or NCS. Optional with cover (has to be ordered separately, see page 111)
Cover	Different covers available (see page 111)
Reflector	Chrome
Mounting	Max. 6 mounting holes, Ø 4.5 mm
Connection type	Connection cable with Wago 3-pole plug
Protection class	IP20 / IP44 with lens
Light source	Compact fluorescent lamp (not included)
Wattage	1x 13 W / 1x 18 W / 1x 26 W
Voltage	220-240 V AC
Frequency	50-60 Hz



PART NO.

DL52/DL63

5501xxxxxx-xxx


	TYPE	W	BASE	PART NO.	WEIGHT
	DL52 M	13 W	G24q-1	5501007900-xxx	0.85 kg
	DL63 M	13 W	G24q-1	5501007800-xxx	0.80 kg
	DL52 M	18 W	G24q-2	5501006300-xxx	0.85 kg
	DL63 M	18 W	G24q-2	5501007000-xxx	0.80 kg
	DL52 L	13 W *	G24q-1	5501009300-xxx	1.20 kg
	DL63 L	13 W *	G24q-1	5501009400-xxx	1.50 kg
	DL52 L	18 W *	G24q-2	5501006500-xxx	1.20 kg
	DL63 L	18 W *	G24q-2	5501007300-xxx	1.15 kg
	DL52 L	26 W	GX24q-3	5501006700-xxx	1.40 kg
	* DIM				

* DIM


EXTRAS

- > 120 V AC execution
- > 230 V LED emergency operation
- > B0 execution
- > Emergency battery back-up
- > Different connectors
- > Built-in connectors (type Ensto)


Form M

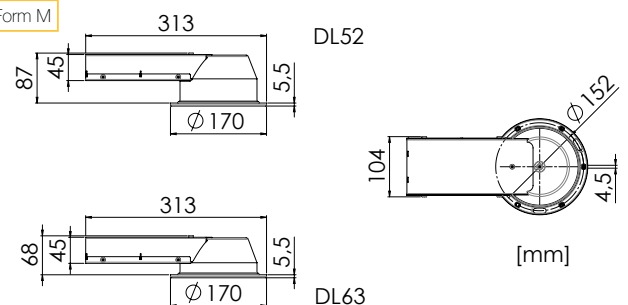

Form L

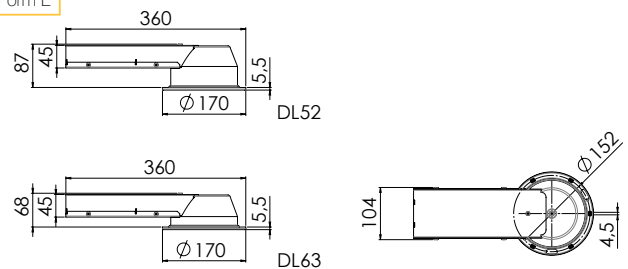

Form L

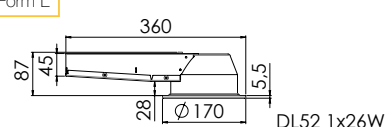



Form A1, 5543000100-001
Zinc coated steel, powder coated RAL9016



Form A1, 5543000100-004
Stainless steel, gold



Form A2, 5543000200-006
Zinc coated steel, lacquered
anodized silver with satined glass



Form A2, 5543000200-018
Stainless steel, nickel brushed with
outside satined / center clear Ø 60 mm glass



Form A2, 5543000200-033
Zinc coated steel, chrome plated with
inside satined Ø 111 mm / outside clear glass



Form A2, 5543000200-043
Zinc coated steel, chrome plated with
PMMA ice crystal lens

Different finishes on request