

Control and signalling devices**Control device system ConSig 8040 series****ConSig**

8040/1380X-54C01SA70-01L13SA05-01L08SA05 Art. No. 130697



- Flexible: Modular design and three sizes make customer-specific versions possible
- Lightweight enclosure made of glass fibre reinforced polyester resin (GRP), suitable for the marine industry and offshore applications

MY R. STAHL 8040B

With the R. STAHL Series 8040 control device system, you can get a clear overview of the control devices. The three combinable sizes and the modular design offer flexibility. You can choose from one standard version and customised variants.

Technical Data**Explosion Protection**

Scope of validity	IECEX European Union (ATEX)
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX PTB 06.0025
IECEX gas explosion protection	Ex db eb IIC T6 Gb
IECEX dust certificate	IECEX PTB 06.0025
IECEX dust explosion protection	Ex tb IIIC T80 °C Db
ATEX gas certificate	PTB 01 ATEX 1105
ATEX gas explosion protection	II 2 G Ex db eb IIC T6 Gb
ATEX dust certificate	PTB 01 ATEX 1105
ATEX dust explosion protection	II 2 D Ex tb IIIC T80 °C Db
Certificates	ATEX (PTB), Brazil (ULB), Canada (UL), China (NEPSI), IECEX (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (UL)
Ship approval	DNVGL
Declaration of Conformity	ATEX (EUK), China (CCC)
Explosion protection note	Product label may vary. Series devices are labelled with ATEX and IECEX.

Electrical Data

Rated operational voltage AC	690 V
Rated operational current	10 A (T6)

Ambient Conditions

Ambient temperature	-60 °C ... +60 °C (T6)
Ambient temperature	-76 °F ... +140 °F (T6)

Mechanical Data

Degree of protection IP (IEC 60529)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Dark grey
Silicone-free	No
AWG clamping range	14 AWG

Control and signalling devices**Control device system ConSig 8040 series**

8040/1380X-54C01SA70-01L13SA05-01L08SA05 Art. No. 130697

Mechanical Data

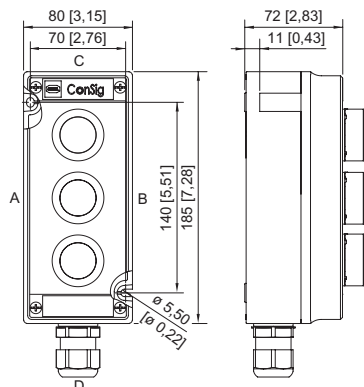
Connection cross-section max.	2.5 mm ²
Solid connection cross section	0.32 – 2.5 mm ²
Connection cross-section AWG single stranded	22 AWG ... 14 AWG
Finely stranded connection cross section	0.32 – 2.5 mm ²
Finely stranded connection cross-section AWG	22 AWG ... 14 AWG
Cover fixing type	With captive screws, M4 stainless steel screws
Width	80 mm
Width, inches	3.15 in
Height	185 mm
Height in inches	7.28 in
Depth	72 mm
Depth in inches	2.76 in
Seal	Silicone, foamed
Weight	680 g
Weight	1.5 lb

Mounting / Installation

Tightening torque of cover screw 1	1.4 Nm
Tightening torque of cover screw 1 lbf in	12.4 lbf in

Components

Installation position top	Indicator lamp bezel, Red
Built-in element top	LED indicator lamp
Installation position middle	Pushbutton, Green - "I"
Built-in element middle	Contact element NC/NO
Installation position bottom	Pushbutton, Red - "0"
Built-in element bottom	Contact element NC/NO
Flange and plates	Without flange, without plates
Entry type	Standard 8161, moulded material
Entry 1	1 x 8161/7-M25-1707-LT
Entry 1 type	Polyamide cable gland, black
Entry 1	M25 x 1.5
Entry 1 terminal area	7 – 17 mm
Entry 1 clamping range, inch	0.28 – 0.67 in
Metal entry possible 1	No

Control and signalling devices**Control device system ConSig 8040 series****STAHL****8040/1380X-54C01SA70-01L13SA05-01L08SA05 Art. No. 130697****Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations**

ConSig 8040/13

Accessories**Indicator lamp bezel**

		Art. No.
	BG054	
	Diameter 39 mm All colours Silicone-free: No	223123

Pushbutton

		Art. No.
	BG001	
	Ø 39 mm Black Designation plate: Black, blank disc without text Front panel mounting Silicone-free: No	223692

Spare Parts

		Art. No.
	Caps for BG054	
	for indicator lamp, all colours packaged	248685

		Art. No.
	Label holder	
	Size 1, without insert disc, 1-line label for actuators Ø 39	223566
	Size 2, without insert disc, 1- or 2-line label for actuators Ø 39	223567
	Size 3, without insert disc, 1-, 2- or 3-line label for actuators Ø 39	223568

Control and signalling devices

Control device system ConSig 8040 series

STAHL

8040/1380X-54C01SA70-01L13SA05-01L08SA05 Art. No. 130697

Locking devices

Art. No.


8602C3-753 for not actuated pushbutton
BG001

244870


8602C3-754 for actuated pushbutton
BG001

244871


8602C3-755 for not actuated pushbutton
BG001

244872

Special key

Art. No.




for tightening plastic locking nut

169101

Tag label

Art. No.


plain
for attaching to enclosure 8040; moulded material;
with paper insert strip

130673

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.

Contact: +971507924960

Email: sales@industrytechstore.com

Website: www.Industrytechstore.com