


ITEM	Symbol	Description	UNIT
Picture of real products			
Rated Voltage	VOLT	DC24V	V
Power	P	40-80	W
Protection Level	IP	IP66	IP
Lighting Angle	θ	120	°
LED Qty	/	80	PCS
Base specifications	/	CREE3030	
Anti-corrosion Grade	/	WF2	
Explosion Proof Grade	/	Ex d IIC T6	
Light Efficiency	η	120	Lm/W
Frequency	f	50/60	Hz
Power Factor	PF	>0.95	PF
Operating Temperature	TOPR	-30~50	℃
Storage Temperature	TOPR	-30~50	℃
Light Source	/	led	
Correlate Color Temperature	Tc	3000-6500	K
Color Rendering Index	CRI	≥70	RA
LED'S Operating Life	LIFE	100000	Hours
Start-up Time	T	≤0.2	S
Executive Standard	/	GB3836.1、 GB3836.2	
Weight	/	5.4	KG
Size	/	Φ230×211	MM

4. Test Report



5. Dimensions

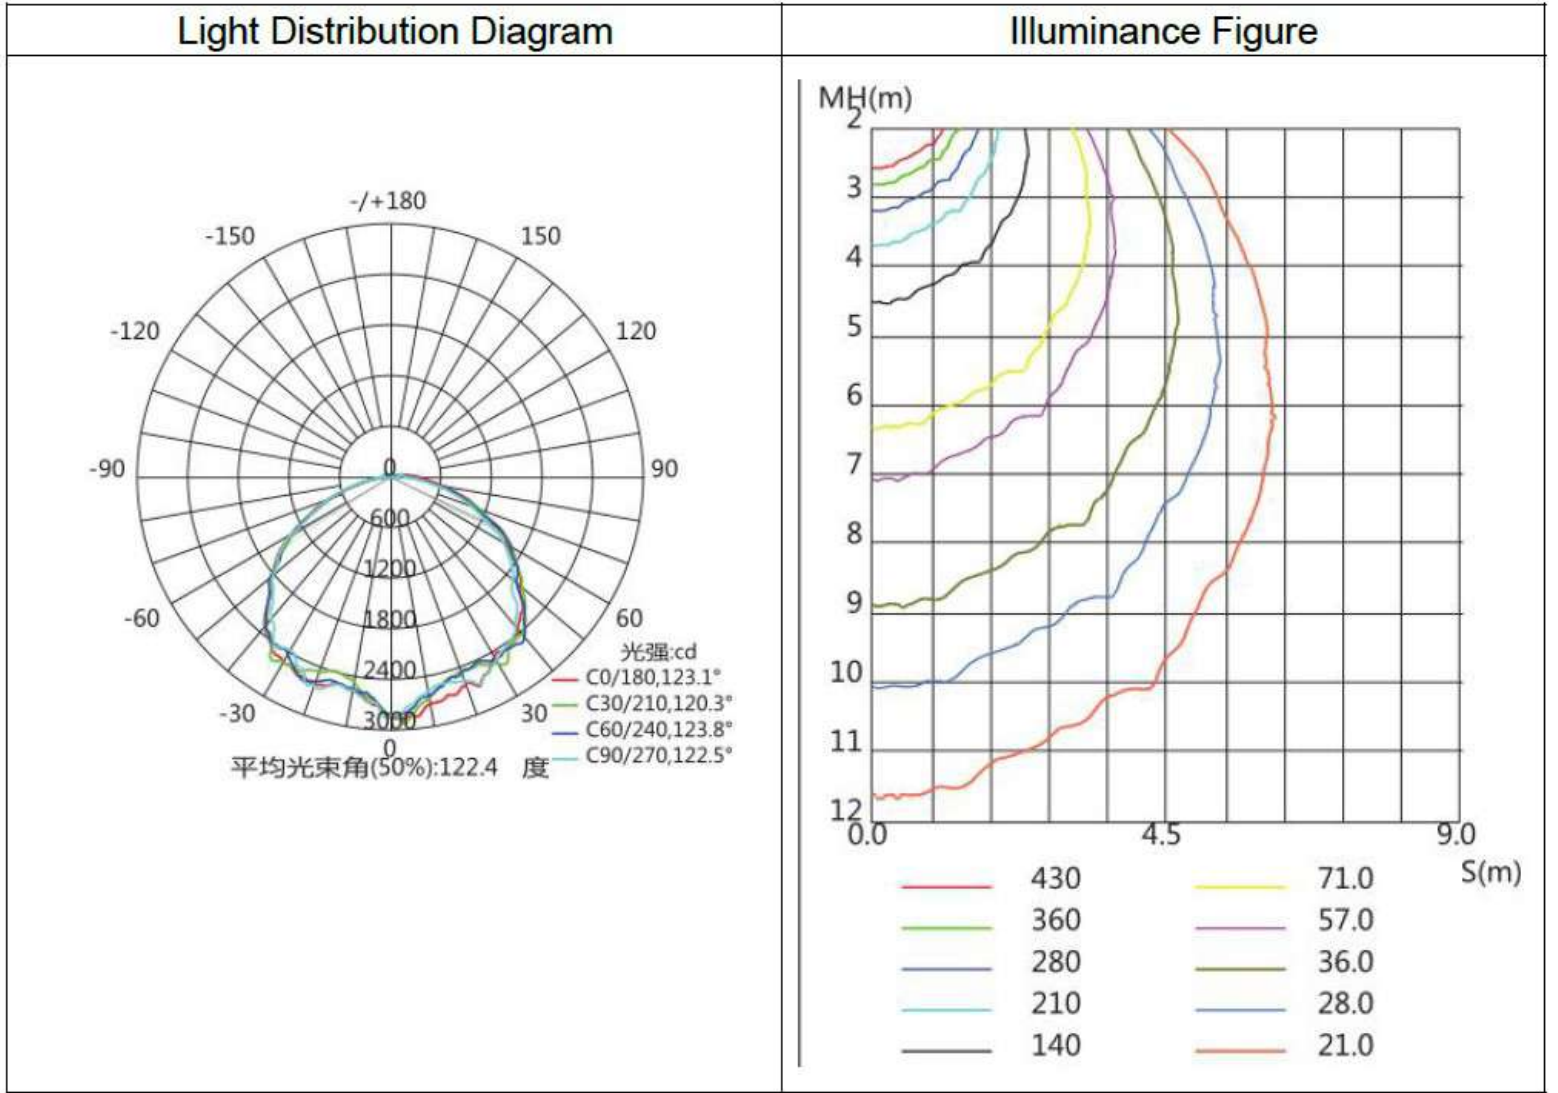