

Electrical data

Rated voltage	100-240VAC, 50-60Hz
Power factor	>0.95
THD	<20%



Luminous characteristics

Power consumption [W]	20 ~ 80	100~120	150~200	250-300
Colour rendering [CRI]	70 (±2)			
Colour temperature [K]	6000-6500			
Luminaire efficiency [Lm/W]	115-130			
Beam angle	120° (60°, 90° is optional, with lens)			

Mechanical data

Degree of protection	IP66			
Cable entry	G 3/4"; NPT 3/4"			
Weight [kg]	5.12	9	12	
Terminal	≤2.5 mm²			
Mounting Styles	Ceiling; Wall Bracket; Pendant			

Dimension [mm]

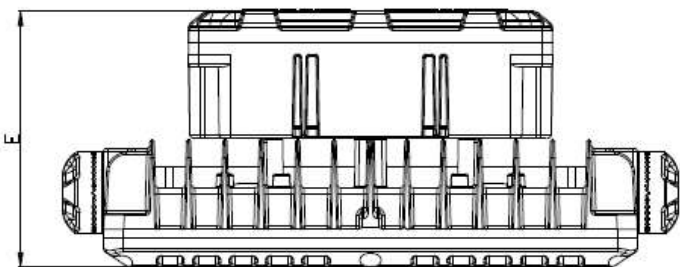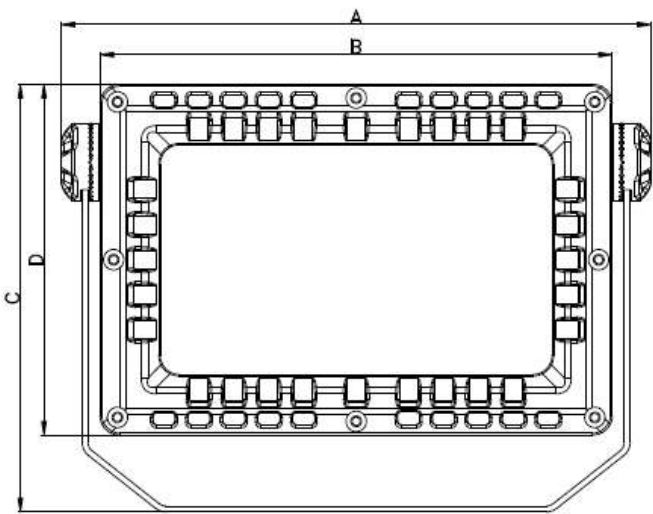

	A	B	C	D	E	F	G	H
GYD970-1	304	264	219	180	126	216	227	219
GYD970-2	384	344	273	240	126	255	277	273
GYD970-3	472	418	315	275	130	295	320	315
GYD970-4	544	492	371	330	130	341	374	371

GYD970-1 Bracket	
GYD970-2 Bracket	
GYD970-3 Bracket	
GYD970-4 Bracket	