



# Harmony, Socket, for RXM2 relays, screw connectors, separate contact

RXZE2S108M

## Main

range of product	Harmony Electromechanical Relays Harmony Timer Relays	
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay REXL with 2 C/O contact	
Device short name	RXZ	
[Ith] conventional free air thermal current	ir thermal 12 A	
product or component type	nponent type Socket	
Contacts type and composition	2 C/O	

# Complementary

[Ue] rated operational voltage	< 250 V conforming to IEC < 300 V conforming to UL	
Connections - terminals	Screw connectors, 1 x 0.341 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Screw connectors, 2 x 0.342 x 1 mm² (AWG 22AWG 17) flexible with cable end Screw connectors, 1 x 0.51 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw connectors, 2 x 0.252 x 1.5 mm² (AWG 20AWG 16) solid without cable end	
Shape of pin	Flat	
Tightening torque	< 1 N.m for M3 screw(s)	
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)	
Wire stripping length	8 mm	
Contact terminal arrangement	Separate	
[Uimp] rated impulse withstand voltage	4 kV	
Overvoltage category	III	
Pollution degree	3	
Sale per indivisible quantity	10	
Width	27 mm	
net weight	0.048 kg	

#### **Environment**

IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	2500 V
Standards	IEC 61984

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Contact: +971507924960 Email: sales@industrytechstore.com

chstore.com



Product certifications	CSA Lloyd's UL
marking	CE
Ambient air temperature for storage	-4085 °C
Ambient air temperature for operation	-4055 °C

# **Packing Units**

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.100 cm
Package 1 Width	2.700 cm
Package 1 Length	7.500 cm
Package 1 Weight	49.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	6.900 cm
Package 2 Width	11.500 cm
Package 2 Length	14.300 cm
Package 2 Weight	531.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	10.955 kg

# **Contractual warranty**

Warranty 18 months





**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

How we assess product sustainability >





Transparency RoHS/REACh

## Well-being performance

<b>Ø</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
	Mercury Free	
<b>Ø</b>	Rohs Exemption Information	Yes

#### **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations



**Dimensions Drawings** 

#### Socket

Socket with Separate Contact Terminals and Connector for 2 Timed C/O Contacts

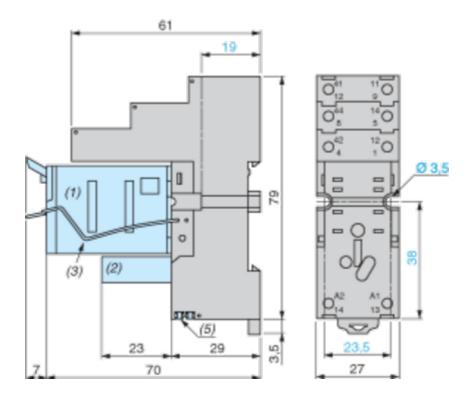

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection




# **Product datasheet**

## RXZE2S108M

**Technical Illustration** 

#### **Dimensions**

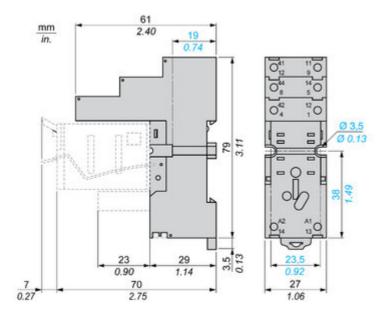


Life Is On Schneider



Image of product / Alternate images

## **Alternative**

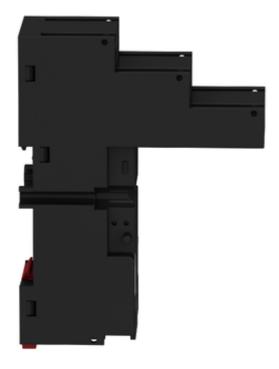



Life Is On Schneider













