

AXC F 3152 - Controller

1069208



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PLCnext Control for the direct control of Axioline F I/Os. With three independent Ethernet interfaces. Complete with connector and bus base module.

Product description

Development process certified in accordance with IEC 62443-4-1 Certified in accordance with IEC 62443-4-2

Your advantages

- Linux operating system
- Supports high-level languages
- Up to 63 AXIO I/O modules can be mounted side by side
- 3 independent Ethernet interfaces
- Increased resistance to EMI
- Extended temperature range of -40°C ... +70°C (see section "Tested successfully: use under extreme ambient conditions" in the user manual)
- PROFINET controller and PROFINET device
- Use of up to two left-alignable extension modules
- Connection to PROFICLOUD
- Numerous protocols supported such as: http, https, FTP, SNTP, SNMP, SMTP, SQL, MySQL, DCP, etc.
- Cybersecurity in accordance with IEC 62443

Commercial data

Item number	1069208
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRADAD
Product key	DRADAD
GTIN	4055626741192
Weight per piece (including packing)	671 g
Weight per piece (excluding packing)	670 g
Customs tariff number	85371091
Country of origin	DE

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Controller
Product family	PLCnext Control
Type	modular

Insulation characteristics

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
Overvoltage category	II
Pollution degree	2

Display

Diagnostics display	no
---------------------	----

System properties

Trusted Platform Module	TPM 1.2 (To hardware version 03) TPM 2.0 (From hardware version 04)
Processor	Intel®Atom® x5-E3930, 2x 1.3 GHz
Flash memory	1 GByte (internal flash memory) SD card from Phoenix Contact (for external flash memory, see accessories)
Retentive data storage	1 Mbyte
RAM	2048 Mbyte

IoT capability: PROFICLOUD

IoT platform	PROFICLOUD
Supports cloud computing	yes

IEC 61131 runtime system

Program memory	12 Mbyte
Data storage system	32 Mbyte

Axioline

Amount of process data	max. 1482 Byte (per station (total input and output data)) max. 1024 Byte (Axioline F local bus (input)) max. 1024 Byte (Axioline F local bus (output))
Number of supported devices	max. 63 (per station)
Number of local bus devices that can be connected	max. 63 (observe current consumption)

PROFINET

Device function	PROFINET controller, PROFINET device
-----------------	--------------------------------------

Update rate	min. 1 ms (32 participants)
	min. 2 ms (64 devices)
	min. 4 ms (128 participants)
Conformance Class	B
Number of supported devices	max. 128 (at PROFINET controller)
Supported functions	FSU PROFINET controller
Device ID	0158 _{hex}
Vendor ID	00B0 _{hex}

Function

Diagnostics display	no
Controller redundancy	yes
Note on controller redundancy	applicative system redundancy possible
Safety function	no
Note on the safety function	Functional safety is provided with the left-alignable AXC F XT SPLC 1000 or AXC F XT SPLC 3000 extension modules.
Industrial cybersecurity	yes

Functionality

Programming languages supported	Symbolic flowchart (SFC)
	Ladder diagram (LD)
	Function block diagram (FBD)
	Structured text (ST)
	C++
	C#
	Java
	Python®
	Simulink®

System requirements

Engineering tool	PLCnext Engineer
	Eclipse®
	Visual Studio®
	MATLAB®/ Simulink®
Application interface	OPC UA®

Electrical properties

Maximum power dissipation for nominal condition	7.1 W
---	-------

Real-time clock

Realtime clock	yes
Description realtime clock	0.7 s/day = 8 ppm at 25 °C

Potentials: Communications power U_L feed-in (the supply of the Axioline F local bus U_{Bus} is generated from U_L)

Supply voltage	24 V DC
----------------	---------

Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple ($\pm 5\%$))
Current draw	max. 650 mA (with 1 A at U_{Bus} for the I/Os)
Power consumption	max. 13.3 W (with 1 A at U_{Bus} for the I/Os)
Protective circuit	Surge protection; electronic Reverse polarity protection; electronic

Potentials: Axioline F local bus supply (U_{Bus})

Supply voltage	5 V DC (via bus base module)
Power supply unit	1 A

Connection data

Connection method	Push-in connection
-------------------	--------------------

Axioline F connector

Connection method	Push-in connection
Conductor cross section, rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Interfaces

Supported protocols	HTTP HTTPS PROFINET INTERBUS Modbus/TCP (via corresponding library) Modbus/RTU (via corresponding library) EtherNet/IP™ (ES Adapter) CANopen® (via corresponding library) DALI (via corresponding library) DALI-2 (via corresponding app) HART (via corresponding app) IO-Link® (via corresponding app) PROFIBUS MQTT (via corresponding app) OPC UA® Server OPC UA® Client (via corresponding app) DHCP (via corresponding app) SFTP SMTP (via corresponding app) SNTP (via corresponding app) SNMP (via corresponding app) DNS (via corresponding app) DNP3 (via corresponding app)
---------------------	---

	IEC 60870-5-1 (via corresponding library)
	IEC 60870-5-104 (via corresponding library)
	IPsec
	syslog
Web server	yes

Axioline F local bus

Number of interfaces	1
Connection method	Bus base module
Transmission speed	100 Mbps


Ethernet

Bus system	RJ45
Number of interfaces	3
Connection method	RJ45 jack
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
Transmission physics	Ethernet in RJ45 twisted pair
Transmission length	max. 100 m

Service

Bus system	USB
Number of interfaces	1
Connection method	USB type C
Note on the connection method	Only device interface

Dimensions

Dimensional drawing	
Width	100 mm
Height	126.93 mm
Depth	75 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Material specifications

Color (Housing)	gray (RAL 7042)
-----------------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (Manufacturers declaration, not evaluated by UL)
----------------------	---

Ambient temperature (operation)	-25 °C ... 60 °C up to 2000 m above mean sea level (observe derating)
	-25 °C ... 55 °C up to 3000 m above mean sea level (observe derating)
	55 °C (with max. 1 A on U _{Bus})
	55 °C ... 60 °C (only in conjunction with an Axioline F power module AXL F PWR 1H (Item no. 2688297))
	-40 °C ... 70 °C (Extended, see Section "Tested successfully: use under extreme ambient conditions" in the user manual)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	5 % ... 95 % (according to DIN EN 61131-2)
Shock (operation)	30g (in accordance with EN 60068-2-27/IEC 60068-2-27)
Vibration (operation)	5g (in accordance with EN 60068-2-6/IEC 60068-2-6)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	58 kPa ... 106 kPa (up to 4500 m above mean sea level)

Approvals

UL, USA/Canada	
Identification	cULus
Certificate	E238705
Corrosive gas test	
Identification	ISA S71.04.2013 G3 Harsh Group A, DIN EN 60068-2-60:2016-06 Method 4
Industrial Cyber Security	
Identification	Industrial IT Security, IACS Component
Certificate	IITS2 029429 0027
Note	Configuration: Security Profile active
References to standards	IEC 62443-4-1:2018
	IEC 62443-4-2:2019
	PPP 15003B:2021 (IEC 62443-4-1: Full ML3 Process Profile)

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conformance with EMC directives	Immunity test in accordance with EN IEC 61000-6-2 Electrostatic discharge (ESD) IEC 61000-4-2 Criterion B, ±6 kV contact discharge, ±8 kV air discharge
	Immunity test in accordance with EN IEC 61000-6-2 Electromagnetic fields IEC 61000-4-3 Criterion A, Field intensity: 10 V/m
	Immunity test in accordance with EN IEC 61000-6-2 Fast transients (burst) IEC 61000-4-4 Criterion B, ±2 kV
	Immunity test in accordance with EN IEC 61000-6-2 Transient overvoltage (surge) IEC 61000-4-5 Criterion B; DC supply lines: ±0.5 kV/±1.0 kV (symmetrical/asymmetrical), fieldbus cable shielding: ±1.0 kV

	Immunity test in accordance with EN IEC 61000-6-2 Conducted interferenceIEC 61000-4-6 Criterion A, Test voltage 10 V
	Noise emission test in accordance with EN IEC 61000-6-4 Class A

Mounting

Mounting type	DIN rail mounting
---------------	-------------------



AXC F 3152 - Controller


1069208

<https://www.phoenixcontact.com/gb/products/1069208>



Drawings

Dimensional drawing

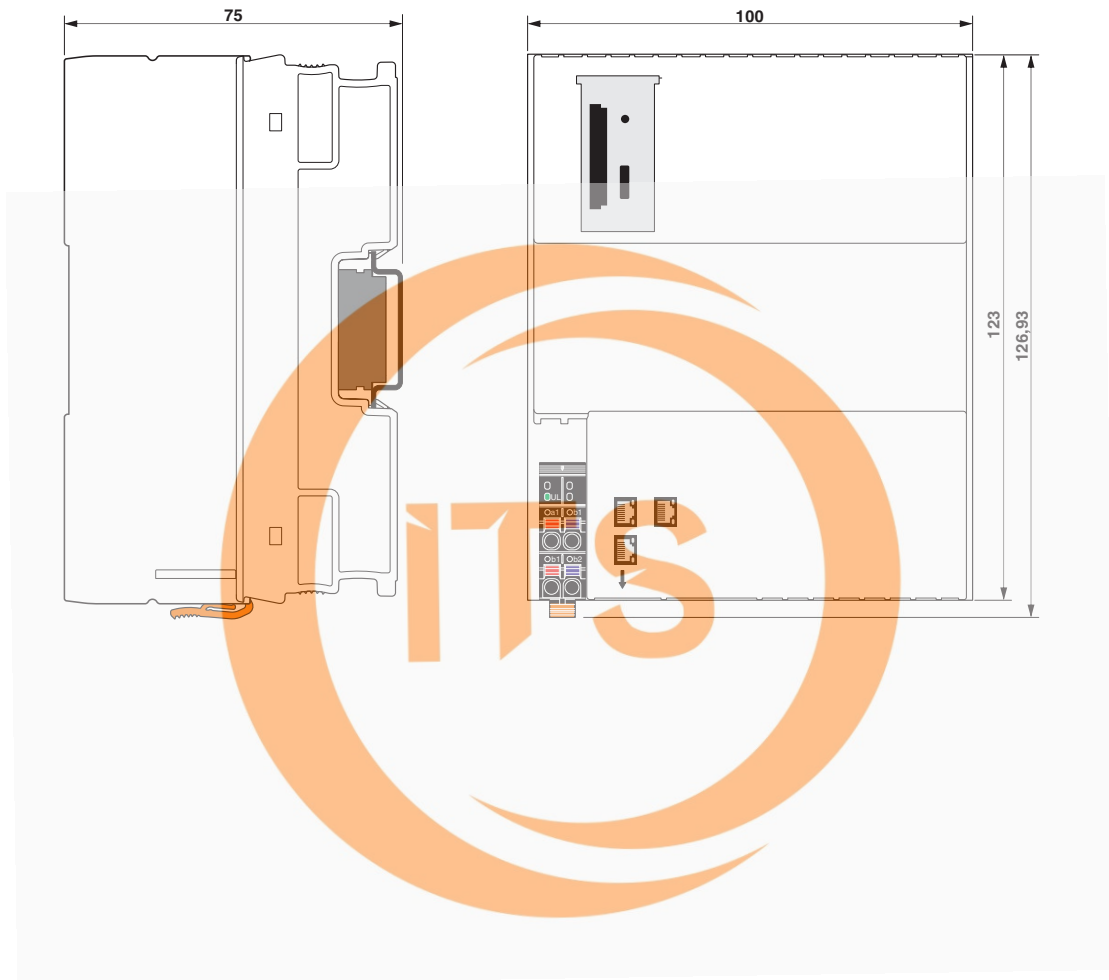

AXC F 3152 - Controller



1069208

<https://www.phoenixcontact.com/gb/products/1069208>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1069208>



EAC

Approval ID: RU*DE*08.B.00529/19



DNV GL

Approval ID: TAA00000DF

BSH

Approval ID: 840

ABS

Approval ID: 20-2059154-PDA

PROFINET

Approval ID: Z13491

PROFINET

Approval ID: Z13492



TÜV SÜD Type tested

Approval ID: IITS2 029429 0027

UAE-RoHS

Approval ID: 23-02-63241



cULus Listed

Approval ID: E238705



RINA

Approval ID: ELE008423XG



AXC F 3152 - Controller

1069208
<https://www.phoenixcontact.com/gb/products/1069208>



Classifications

ECLASS


ECLASS-11.0	27242207
ECLASS-12.0	27242207
ECLASS-13.0	27242207

ETIM

ETIM 9.0	EC000236
----------	----------

UNSPSC

UNSPSC 21.0	32151700
-------------	----------

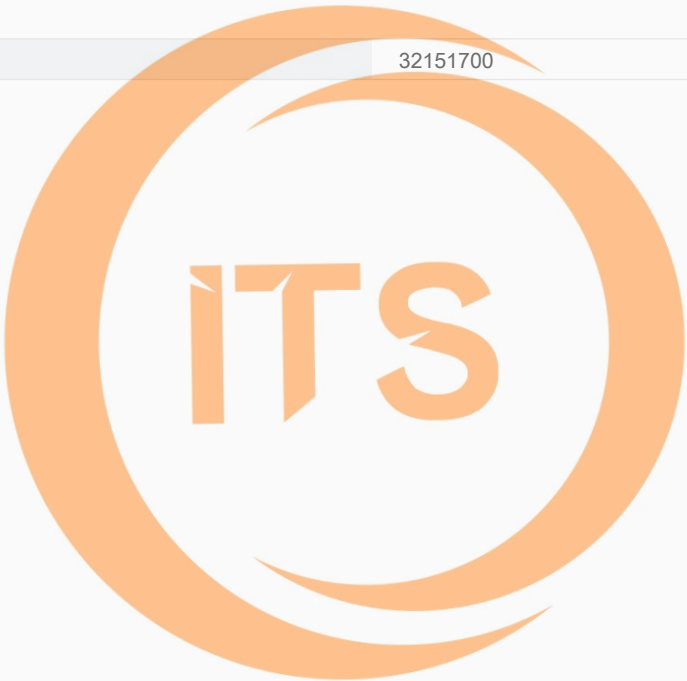

AXC F 3152 - Controller

1069208

<https://www.phoenixcontact.com/gb/products/1069208>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(a), 6(a)-I, 7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	af0e0fbc-0c65-4147-b7b5-a67bef6bf16c

