



1020600943

# VSP-223-L

Main Station - Batteryless Telephone System - 12-Way


- 12 extensions selector switch
- ❷ Built-in relay latch timer for activation of external visible or audible 24V DC signal units
- Alarm stop button
- Noise compensated microphone
- Optical LED call indication at front (in addition to audible call signal)
- Flush mounted
- ✓ Wall mounting with corresponding metal cabinet type MBOKS-G
- ✓ Desk mounting with corresponding wooden cabinet type VSPC-OAK
- Suitable for installation in control rooms and noisy areas like steering gear, engine- and thrusterrooms, etc

## Description

VSP-223-L is a batteryless telephone requiring no external power supply and fulfils the demands for emergency communication between vital positions. The unit is tested and type approved for internal communication for marine vessels.

### **Technical Dimensions**



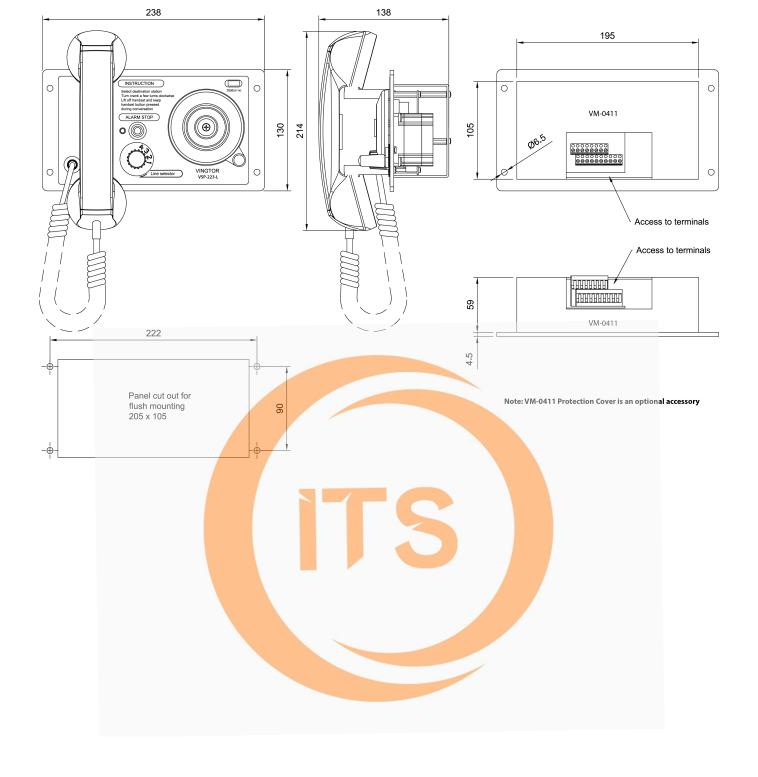


# Specifications

#### **GENERAL**

Connections	Screw terminals
Color	Black
IP rating	IP-44
Dimensions (WxHxD)	238 x 130 x 77 mm
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C
Swiching Current (max)	8 A


## Accessories

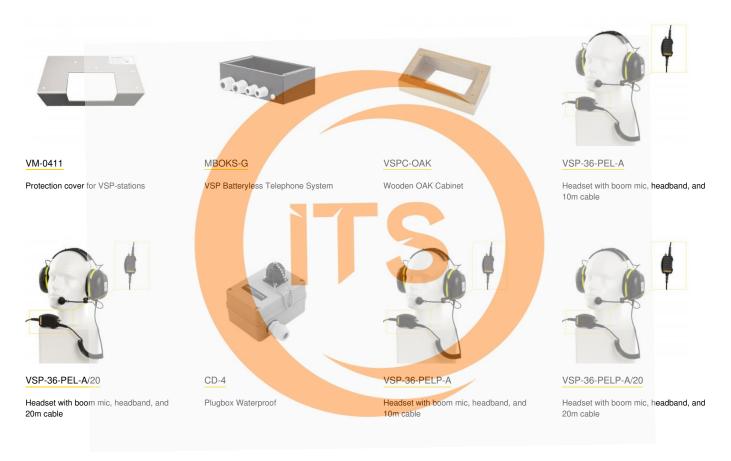



VSP-36-PELP-A/25

Headset with boom mic, headband, and 25m cable

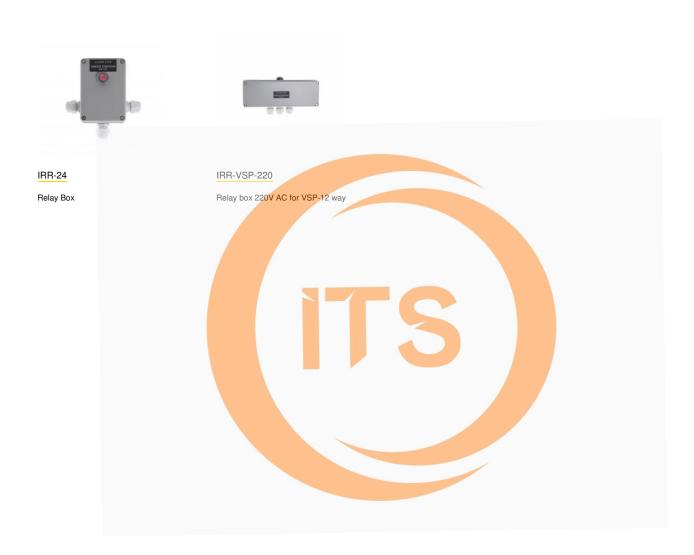

page 4/4

Contact: +971507924960

Email: sales@industrytechstore.com Website: www.industrytechstore.com

