

Terminal boxes

Series G150

STAHL



- > Enclosure made from brush finished stainless steel 1.4301 (AISI 304) or 1.4404 (AISI 316L)
- > With a choice of hinges, cam lock or screw-on cover
- > Hinged versions with wide opening angle of 130°
- > Withstands a wider range of ambient temperatures due to high-quality sealing materials
- > Protection channel that runs around the edge to prevent the ingress of water
- > M8 external earth connection
- > Flange plate that can be screwed on from the outside for easy installation
- > IP66 degree of protection

E3

www.stahl.de



12779E00

WebCode G150A

Terminal boxes

Series G150

Advantages of the G150 series



The new shape of the drainage edge allows quick water drainage and prevents standing water from accumulating around the seal. This solution helps to increase the safety inside the enclosure.

12660E00




The flange plate mounted from the outside is another advantage of this enclosure: This guarantees perfect accessibility - even if the cables are already installed.

13128E00



The large opening angle provides convenient access and enables easy and fast work.

13130E00



If regular access to the enclosure is required, the version equipped with a cam lock (or a hinge) is recommended.

12659E00



The M8 earth connection is already included in the delivery. In addition, there are different mounting possibilities.

13129E00

Terminal boxes

Series G150



Advantages of the G150 series



16639E00

The locking device is used to lock the cam locks by way of a padlock. These can be easily mounted and retrofitted.




16636E00

Enclosures that are opened from the top must be equipped with a cover support. This makes it possible to hold the enclosure cover open in different positions.



16959E00

The modular construction design of the sunroof system allows several enclosures to be covered simultaneously. This sunroof system can be retrofitted at any time. The bayonet suspension system enables quick and easy mounting.



17721E00

The terminal box is optionally available with interior construction on Z rails or mounting rails made from 1.4404 stainless steel (AISI316L).



17812E00



17813E00





Label holder support for subsequent retrofitting of labels. The label holder is available on request, allowing easier on-site mounting of labels. The label holder is available in various sizes.

E3

Terminal boxes

Series G150

Order number supplement

G150/1-.....	Not the Ex version		
G150/1-.....	Dimensions of side C/D	Without hinge	With hinge
G150/1-.....	Dimensions of side A/B	 13020E00	 13021E00
			 13022E00
			 13023E00
		I = hinge	
G150/1-.....-091-....	Depth 91 mm		
G150/1-.....-150-....	Depth 150 mm		
G150/1-.....-190-....	Depth 190 mm		
G150/1-.....-230-....	Depth 230 mm		
G150/1-.....-2-...	1.4301 stainless steel		
G150/1-.....-3-...	Stainless steel 1.4404		
G150/1-.....-3-..	Brushed (line pattern)		
G150/1-.....-1.	Cover fixed with screws		
G150/1-.....-2.	Cover with hinge and cam lock		

Enclosure height

	91 mm	150 mm	190 mm	230 mm	With hinge
	G150/1-.....-091-3.1	G150/1-.....-150-3.1	G150/1-.....-190-3.1	G150/1-.....-230-3.1	
G150/1-0116-0116-...-311	x				
G150/1-0176-0116-...-311	x				
G150/1-0176-0176-...-311	x				
G150/1-0236-0176-...-311	x	x			
G150/1-0176-0236-...-3.1		x			x
G150/1-0300-0200-...-3.1		x			x
G150/1-0200-0300-...-3.1		x			x
G150/1-0360-0176-...-311	x	x			
G150/1-0176-0360-...-3.1		x			x
G150/1-0360-0360-...-3.1	x	x	x	x ¹⁾	x
G150/1-0400-0300-...-3.1		x ¹⁾		x	x
G150/1-0300-0400-...-3.1		x		x	x
G150/1-0400-0400-...-3.1		x ³⁾		x ³⁾	x
G150/1-0550-0360-...-3.1				x	x
G150/1-0360-0550-...-321				x ²⁾	x
G150/1-0600-0400-...-3.1		x ¹⁾		x	x
G150/1-0400-0600-...-3.1		x		x	x
G150/1-0727-0360-...-311	x	x	x		
G150/1-0360-0727-...-321		x ²⁾	x ²⁾		x
G150/1-0600-0600-...-3.1		x		x	x
G150/1-0787-0480-...-321				x	x

x = available
¹⁾ = without hinge
²⁾ = only with hinge
³⁾ = Depth 300

Terminal boxes

Series G150



Version 116 x 116 and 176 x 116 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																						
		Wago																						
Nominal cross-section [mm²]		2.5				4									6					10				
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE		
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2		
Mounting rail placement		12971E00 Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
G150/1-0116-0116-...-3.1			1	14	14	14	14	11	11	11	-	-	11	11	11	9	9	9	-	-	-	-	-	
G150/1-0176-0116-...-3.1			1	17	17	17	17	14	14	14	14	-	-	14	14	14	12	12	12	-	-	-	-	-

Note

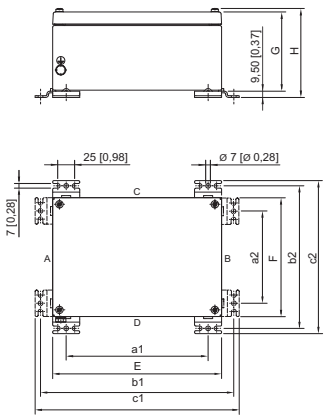
	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm

Terminal boxes equipped with terminals > 35 to 300 mm² on request

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 D = 91 mm	W x H	without flange				Flange		D = 91 mm	W x H	without flange				Flange	
		A	B	C	D	A/B	C/D			A	B	C	D	A/B	C/D
	116 x 116								176 x 116						
	M16 x 1.5	6	6	5	5	-	-		M16 x 1.5	6	6	12	12	-	-
	M20 x 1.5	4	4	3	3	-	-		M20 x 1.5	4	4	8	8	-	-
	M25 x 1.5	2	2	2	2	-	-		M25 x 1.5	2	2	4	4	-	-
	M32 x 1.5	1	1	1	1	-	-		M32 x 1.5	1	1	3	3	-	-
	M40 x 1.5	1	1	1	1	-	-		M40 x 1.5	1	1	2	2	-	-
	M50 x 1.5	-	-	-	-	-	-		M50 x 1.5	-	-	-	-	-	-
	M63 x 1.5	-	-	-	-	-	-		M63 x 1.5	-	-	-	-	-	-

Dimensional Drawings (all dimensions in mm) - Subject to alterations

 12648E00	Dimensions in mm	Depth 91 mm	Dimensions in mm	Depth 91 mm
	a1	76	a1	136
	a2	76	a2	76
	b1	152	b1	212
	b2	152	b2	152
	c1	168	c1	228
	c2	168	c2	168
	E	116.5	E	176.5
	F	116.5	F	116.5
	G	91	G	91
	H	106	H	106

Type G150/1-0116-0116-...-3.1 Type G150/1-0176-0116-091-...-1.

Terminal boxes

Series G150

Version 176 x 176

Terminal box up to 35 mm²

		Max. number of terminals																						
		Wago																						
Nominal cross-section [mm²]		2.5				4								6				10						
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE		
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2		
Mounting rail placement		A B C D 12970E00 <th>Number of mounting rails</th> <td rowspan="4">2001 - 1201</td> <td rowspan="4">2001 - 1204</td> <td rowspan="4">2001 - 1207</td> <td rowspan="4">2001 - 1307</td> <td rowspan="4">2002 - 1201</td> <td rowspan="4">2002 - 1202</td> <td rowspan="4">2002 - 1204</td> <td rowspan="4">2002 - 1207</td> <td rowspan="4">2002 - 1401</td> <td rowspan="4">2002 - 1407</td> <td rowspan="4">2002 - 1301</td> <td rowspan="4">2002 - 1304</td> <td rowspan="4">2002 - 1307</td> <td rowspan="4">2004 - 1201</td> <td rowspan="4">2004 - 1204</td> <td rowspan="4">2004 - 1207</td> <td rowspan="4">2004 - 1301</td> <td rowspan="4">2004 - 1407</td> <td rowspan="4">2006 - 1201</td> <td rowspan="4">2006 - 1204</td> <td rowspan="4">2006 - 1207</td>	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207
G150/1-0176-0176-...-3.1	1	23	23	23	23	19	19	19	19	19	19	19	19	19	16	16	16	16	16	13	13	13		

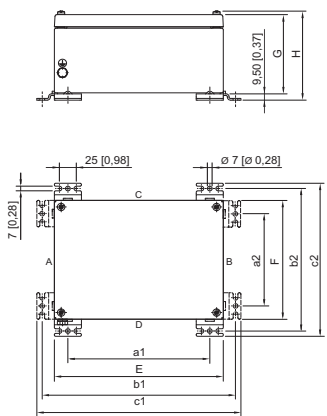
Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00 D = 91 mm	W x H	without flange				Flange	
	176 x 176	A	B	C	D	A/B	C/D
	M16 x 1.5	11	11	12	12	-	-
	M20 x 1.5	8	8	8	8	-	-
	M25 x 1.5	4	4	4	4	-	-
	M32 x 1.5	3	3	3	3	-	-
	M40 x 1.5	2	2	2	2	-	-
	M50 x 1.5	-	-	-	-	-	-
	M63 x 1.5	-	-	-	-	-	-

Dimensional Drawings (all dimensions in mm) - Subject to alterations

 12648E00		Dimensions in mm	Depth 91 mm
		a1	136
		a2	136
		b1	212
		b2	212
		c1	228
		c2	228
		E	176.5
		F	176.5
		G	91
		H	106

Type G150/1-0176-0176-091-..1.


Terminal boxes

Series G150



Version 236 x 176 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																					
		Wago																					
Nominal cross-section [mm²]		2.5				4								6				10					
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	
Mounting rail placement																							
	Number of mounting rails 12969E00	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
G150/1-0236-0176-...-3.1	1	37	37	37	37	27	27	27	27	27	27	27	27	27	23	23	23	23	23	21	21	21	

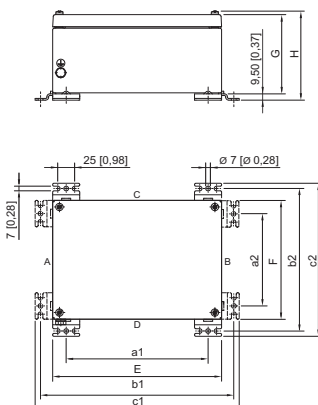
Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm; 150 mm
Terminal boxes equipped with terminals > 35 to 300 mm² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00	W x H	without flange				Flange		W x H	without flange				Flange	
		A	B	C	D	A/B	C/D		A	B	C	D	A/B	C/D
D = 91 mm	236 x 176							236 x 176						
	M16 x 1.5	11	11	14	14	-	4	M16 x 1.5	28	28	41	41	9	17
	M20 x 1.5	8	8	11	11	-	4	M20 x 1.5	17	17	26	26	6	10
	M25 x 1.5	4	4	5	5	-	2	M25 x 1.5	10	10	16	16	4	7
	M32 x 1.5	3	3	4	4	-	-	M32 x 1.5	6	6	10	10	2	5
	M40 x 1.5	2	2	3	3	-	-	M40 x 1.5	4	4	6	6	1	3
	M50 x 1.5	-	-	-	-	-	-	M50 x 1.5	3	3	4	4	1	2
D = 150 mm	M63 x 1.5	-	-	-	-	-	-	M63 x 1.5	2	2	2	2	-	2

Dimensional Drawings (all dimensions in mm) - Subject to alterations

 12648E00	Dimensions in mm	Depth	
		91 mm	150 mm
a1	196	196	
a2	136	136	
b1	272	272	
b2	212	212	
c1	288	288	
c2	228	228	
E	236.5	236.5	
F	176.5	176.5	
G	91	150	
H	106	165	


Type G150/1-0236-0176-091-..1. and G150/1-0236-0176-150-..1.

Terminal boxes

Series G150

Version 176 x 236 (vertical)

Terminal box up to 35 mm²

	Max. number of terminals																	
	Wago																	
Nominal cross-section [mm ²]	2.5				4				6				10					
Colour	GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal	2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4
Mounting rail placement																		
 19233E00	Number of mounting rails																	
	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407
G150/1-0176-0236-...-3.1	1	24	24	24	19	19	19	19	19	19	19	19	19	16	16	16	16	16
G150/1-0176-0236-...-3.1	2	48	48	48	38	38	38	38	-	-	38	38	38	32	32	32	32	-

Note

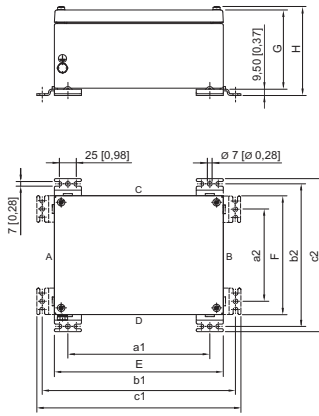
	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00	W x H	without flange				Flange	
	176 x 236	A	B	C	D	A/B	C/D
	M16 x 1.5	67	67	28	28	a	9
	M20 x 1.5	42	42	17	17		6
	M25 x 1.5	26	26	10	10		4
	M32 x 1.5	19	19	6	6		2
	M40 x 1.5	10	10	4	4		1
	M50 x 1.5	6	6	3	3		1
	M63 x 1.5	4	4	2	2		-

a = on request

Dimensional Drawings (all dimensions in mm) - Subject to alterations

 12648E00	Dimensions in mm		Depth	
			150 mm	150 mm*
	a1	136	136	
	a2	196	196	
	b1	212	212	
	b2	272	272	
	c1	228	228	
	c2	288	288	
	E	176.5	176.5	
	F	236.5	236.5	
	G	150	150	
	H	165	163.5	

Type G150/1-0176-0236-150-..1.
Type G150/1-0176-0236-150-..2.*

* with hinge or cam lock

Terminal boxes

Series G150



Version 300 x 200 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																				
		Wago																				
Nominal cross-section [mm²]		2.5				4									6					10		
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2
Mounting rail placement																						
	Number of mounting rails																					
																						
G150/1-0300-0200-...-3.1	1	54	54	54	54	43	43	43	43	43	43	43	43	43	36	36	36	36	36	30	30	30
G150/1-0300-0200-...-3.1	2	108	108	108	-	86	86	86	86	-	-	-	-	-	72	72	72	-	-	-	-	-

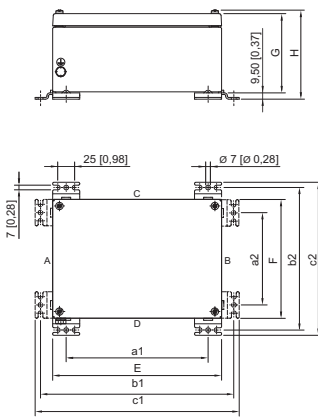
Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange	
	300 x 200	A	B	C	D	A/B	C/D
	M16 x 1.5	33	33	54	54	9	17
	M20 x 1.5	20	20	34	34	6	10
	M25 x 1.5	12	12	21	21	4	7
	M32 x 1.5	7	7	16	16	2	5
	M40 x 1.5	5	5	8	8	1	3
	M50 x 1.5	3	3	5	5	1	2
	M63 x 1.5	2	2	3	3	-	2

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	
	Depth 150 mm	150 mm*
a1	260	260
a2	160	160
b1	336	336
b2	236	236
c1	352	352
c2	252	252
E	300	300
F	200	200
G	150	150
H	165	163.5

Type G150/1-0300-0200-150-...1.
Type G150/1-0300-0200-150-...2.*


* with hinge or cam lock

Terminal boxes

Series G150

Version 200 x 300 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																					
		Wago																					
Nominal cross-section [mm²]		2.5				4										6				10			
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	
Mounting rail placement																							
 12966E00	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
		G150/1-0200-0300-...-3.1	1	30	30	30	30	24	24	24	24	24	24	24	24	20	20	20	20	20	17	17	17
		G150/1-0200-0300-...-3.1	2	60	60	60	60	48	48	48	48	48	48	48	48	40	40	40	40	40	34	34	34
		G150/1-0200-0300-...-3.1	3	90	90	90	-	72	72	72	72	-	-	-	-	-	-	-	-	-	-	-	-
		G150/1-0200-0300-...-3.1																					

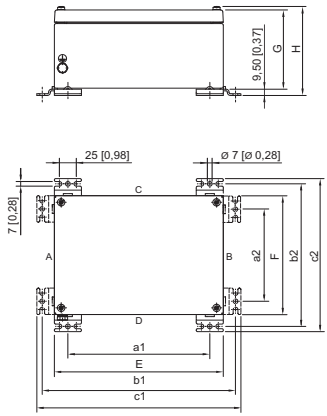
Note

Order numbers for enclosures with mounting rails and PE or PA rails	
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange	
		A	B	C	D	A/B	C/D
D = 150 mm	200 x 300						
	M16 x 1.5	54	54	33	33	17	9
	M20 x 1.5	34	34	20	20	10	6
	M25 x 1.5	21	21	12	12	7	4
	M32 x 1.5	16	16	7	7	5	2
	M40 x 1.5	8	8	5	5	3	1
	M50 x 1.5	5	5	3	3	2	1
	M63 x 1.5	3	3	2	2	2	-

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	
	Depth	150 mm
a1	160	160
a2	260	260
b1	236	236
b2	336	336
c1	252	252
c2	352	352
E	200	200
F	300	300
G	150	150
H	165	163.5

Type G150/1-0200-0300-150-..1.
Type G150/1-0200-0300-150-..2.*

* with hinge or cam lock


Terminal boxes

Series G150



Version 360 x 176 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																				
		Wago																				
Nominal cross-section [mm²]		2.5				4								6				10				
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2
Mounting rail placement																						
	Number of mounting rails																					
12965E00		2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207
G150/1-0360-0176-...-3.1	1	64	64	64	64	52	52	52	52	52	52	52	52	52	43	43	43	43	43	36	36	36

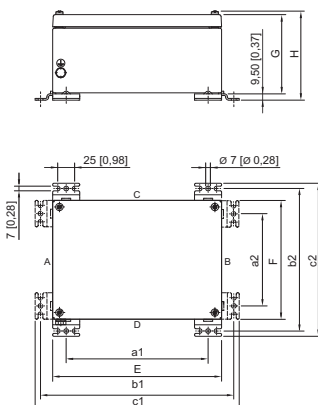
Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm; 150 mm
Terminal boxes equipped with terminals > 35 to 300 mm² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange			W x H	without flange				Flange		
		A	B	C	D	A/B	C/D			A	B	C	D	A/B	C/D	
D = 91 mm	360 x 176								360 x 176							
	M16 x 1.5	11	11	27	27	-	9		M16 x 1.5	28	28	67	67	9	28	
	M20 x 1.5	8	8	20	20	-	6		M20 x 1.5	17	17	42	42	6	18	
	M25 x 1.5	4	4	10	10	-	6		M25 x 1.5	10	10	26	26	4	13	
	M32 x 1.5	3	3	7	7	-	-		M32 x 1.5	6	6	19	19	2	9	
	M40 x 1.5	2	2	5	5	-	-		M40 x 1.5	4	4	10	10	1	5	
	M50 x 1.5	-	-	-	-	-	-		M50 x 1.5	3	3	6	6	1	3	
D = 150 mm	M63 x 1.5	-	-	-	-	-	-		M63 x 1.5	2	2	4	4	-	3	

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	Depth	
		91 mm	150 mm
a1		320	320
a2		136	136
b1		396	396
b2		212	212
c1		412	412
c2		228	228
E		360	360
F		176.5	176.5
G		91	150
H		106	165


Type G150/1-0360-0176-091-..1. and G150/1-0360-0176-150-..1.

Terminal boxes

Series G150

Version 176 x 360 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																	
		Wago																	
Nominal cross-section [mm ²]		2.5			4									6			10		
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4
Mounting rail placement																			
	Number of mounting rails																		
		2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407
G150/1-0176-0360-...-3.1	1	24	24	24	24	19	19	19	19	19	19	19	19	19	16	16	16	16	16
G150/1-0176-0360-...-3.1	2	48	48	48	48	38	38	38	38	38	38	38	38	38	32	32	32	32	32
G150/1-0176-0360-...-3.1	3	72	72	72	72	57	57	57	57	57	57	57	57	57	48	48	48	48	-

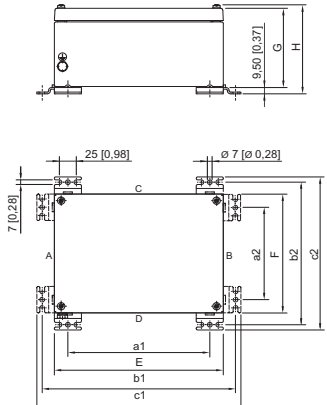
Note

		Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information		Terminal block: Number and type
Cable entry		Number, type and installation side in enclosure
Flanges		can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals		Phoenix; Weidmüller available on request
Available enclosure depths		150 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request		

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange	
	176 x 360	A	B	C	D	A/B	C/D
	M16 x 1.5	67	67	28	28	28	9
	M20 x 1.5	42	42	17	17	18	6
	M25 x 1.5	26	26	10	10	13	4
	M32 x 1.5	19	19	6	6	9	2
	M40 x 1.5	10	10	4	4	5	1
	M50 x 1.5	6	6	3	3	3	1
	M63 x 1.5	4	4	2	2	3	-

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	Depth	
		150 mm	150 mm*
a1		136	136
a2		320	320
b1		212	212
b2		396	396
c1		228	228
c2		412	412
E		176.5	176.5
F		360	360
G		150	150
H		165	163.5

Type G150/1-0176-0360-150-...1.
Type G150/1-0176-0360-150-...2.*

* with hinge or cam lock

Terminal boxes

Series G150



Version 360 x 360

Terminal box up to 35 mm²

		Max. number of terminals																				
		Wago																				
Nominal cross-section [mm ²]		2.5				4								6				10				
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2
Mounting rail placement																						
	Number of mounting rails																					
G150/1-0360-0360-...-3.1	1	64	64	64	64	52	52	52	52	52	52	52	52	52	43	43	43	43	43	36	36	36
G150/1-0360-0360-...-3.1	2	128	128	128	128	104	104	104	104	104	104	104	104	104	86	86	86	86	86	72	72	72
G150/1-0360-0360-...-3.1	3	192	192	192	192	156	156	-	-	-	-	156	156	156	129	129	129	129	-	108	108	108

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm; 150 mm; 190 mm; 230 mm

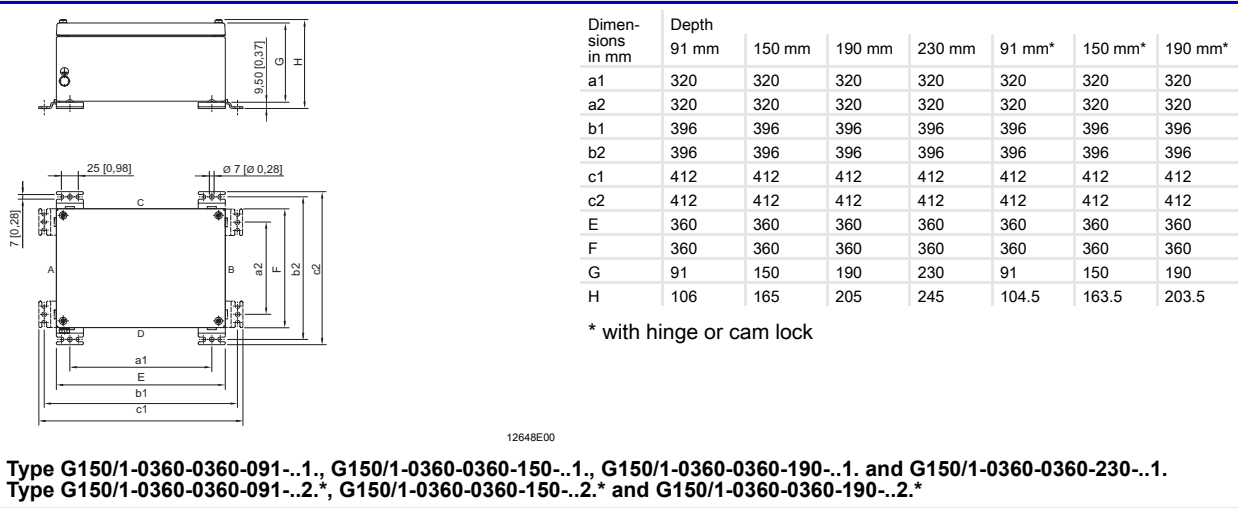
Terminal boxes equipped with terminals > 35 to 300 mm² on request

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	D = 91 mm	W x H	without flange				Flange		W x H	without flange				Flange	
		360 x 360	A	B	C	D	A/B	C/D	360 x 360	A	B	C	D	A/B	C/D
		M16 x 1.5	27	27	27	27	9	9	M16 x 1.5	65	65	67	67	28	28
		M20 x 1.5	20	20	20	20	6	6	M20 x 1.5	42	42	42	42	18	18
		M25 x 1.5	10	10	10	10	6	6	M25 x 1.5	26	26	26	26	13	13
		M32 x 1.5	7	7	7	7	-	-	M32 x 1.5	18	18	19	19	9	9
		M40 x 1.5	5	5	5	5	-	-	M40 x 1.5	10	10	10	10	5	5
		M50 x 1.5	-	-	-	-	-	-	M50 x 1.5	6	6	6	6	3	3
		M63 x 1.5	-	-	-	-	-	-	M63 x 1.5	4	4	4	4	3	3
	D = 150 mm	W x H	without flange				Flange		W x H	without flange				Flange	
		360 x 360	A	B	C	D	A/B	C/D	360 x 360	A	B	C	D	A/B	C/D
		M16 x 1.5	65	65	67	67	40	40	M16 x 1.5	91	91	91	91	69	69
		M20 x 1.5	42	42	42	42	28	28	M20 x 1.5	59	59	59	59	44	44
		M25 x 1.5	26	26	26	26	20	20	M25 x 1.5	43	43	43	43	28	28
		M32 x 1.5	18	18	19	19	12	12	M32 x 1.5	27	27	27	27	20	20
		M40 x 1.5	10	10	10	10	8	8	M40 x 1.5	15	15	15	15	10	10
		M50 x 1.5	6	6	6	6	6	6	M50 x 1.5	9	9	9	9	8	8
		M63 x 1.5	4	4	4	4	3	3	M63 x 1.5	6	6	6	6	6	6
	D = 190 mm	W x H	without flange				Flange		W x H	without flange				Flange	
		360 x 360	A	B	C	D	A/B	C/D	360 x 360	A	B	C	D	A/B	C/D
		M16 x 1.5	65	65	67	67	40	40	M16 x 1.5	91	91	91	91	69	69
		M20 x 1.5	42	42	42	42	28	28	M20 x 1.5	59	59	59	59	44	44
		M25 x 1.5	26	26	26	26	20	20	M25 x 1.5	43	43	43	43	28	28
		M32 x 1.5	18	18	19	19	12	12	M32 x 1.5	27	27	27	27	20	20
		M40 x 1.5	10	10	10	10	8	8	M40 x 1.5	15	15	15	15	10	10
		M50 x 1.5	6	6	6	6	6	6	M50 x 1.5	9	9	9	9	8	8
		M63 x 1.5	4	4	4	4	3	3	M63 x 1.5	6	6	6	6	6	6
	D = 230 mm	W x H	without flange				Flange		W x H	without flange				Flange	
		360 x 360	A	B	C	D	A/B	C/D	360 x 360	A	B	C	D	A/B	C/D
		M16 x 1.5	65	65	67	67	40	40	M16 x 1.5	91	91	91	91	69	69
		M20 x 1.5	42	42	42	42	28	28	M20 x 1.5	59	59	59	59	44	44
		M25 x 1.5	26	26	26	26	20	20	M25 x 1.5	43	43	43	43	28	28
		M32 x 1.5	18	18	19	19	12	12	M32 x 1.5	27	27	27	27	20	20
		M40 x 1.5	10	10	10	10	8	8	M40 x 1.5	15	15	15	15	10	10
		M50 x 1.5	6	6	6	6	6	6	M50 x 1.5	9	9	9	9	8	8
		M63 x 1.5	4	4	4	4	3	3	M63 x 1.5	6	6	6	6	6	6

Terminal boxes
Series G150

Dimensional Drawings (all dimensions in mm) - Subject to alterations




Terminal boxes

Series G150



Version 400 x 300 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																					
		Wago																					
Nominal cross-section [mm²]		2.5				4								6				10					
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	
Mounting rail placement																							
	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
G150/1-0400-0300-...-3.1		1	78	78	78	78	63	63	63	63	63	63	63	63	63	52	52	52	52	52	43	43	43
G150/1-0400-0300-...-3.1		2	156	156	156	156	126	126	126	126	126	126	126	126	126	104	104	104	104	104	86	86	86
G150/1-0400-0300-...-3.1		3	234	234	234	-	189	189	189	189	-	-	-	-	-	-	-	-	-	-	-	-	-

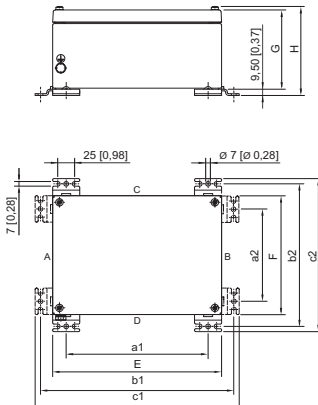
Note

Order numbers for enclosures with mounting rails and PE or PA rails	
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00	D = 150 mm	W x H	without flange				Flange		D = 230 mm	W x H	without flange				Flange	
		400 x 300	A	B	C	D	A/B	C/D		400 x 300	A	B	C	D	A/B	C/D
		M16 x 1.5	54	54	74	74	17	28		M16 x 1.5	91	91	123	123	a	69
		M20 x 1.5	34	34	48	48	10	18		M20 x 1.5	59	59	85	85		44
		M25 x 1.5	21	21	30	30	7	13		M25 x 1.5	43	43	60	60		28
		M32 x 1.5	15	15	22	22	5	9		M32 x 1.5	27	27	39	39		20
		M40 x 1.5	8	8	11	11	3	5		M40 x 1.5	15	15	22	22		10
		M50 x 1.5	5	5	7	7	2	3		M50 x 1.5	9	9	14	14	8	
		M63 x 1.5	3	3	5	5	2	3		M63 x 1.5	6	6	9	9	6	
a = on request																

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	Depth		
		150 mm	230 mm	230 mm*
a1		360	360	360
a2		260	260	260
b1		436	436	436
b2		336	336	336
c1		452	452	452
c2		352	352	352
E		400	400	400
F		300	300	300
G		150	230	230
H		165	245	243.5

Type G150/1-0400-0300-150-..1. and G150/1-0400-0300-230-..1.
Type G150/1-0400-0300-230-..2.*


* with hinge or cam lock

Terminal boxes

Series G150

Version 300 x 400 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																	
		Wago																	
Nominal cross-section [mm ²]		2.5				4				6				10					
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4
Mounting rail placement		2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407
 12961E00	Number of mounting rails	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	G150/1-0300-0400-...-3.1	54	54	54	54	43	43	43	43	43	43	43	43	43	36	36	36	36	36
	G150/1-0300-0400-...-3.1	108	108	108	108	86	86	86	86	86	86	86	86	86	72	72	72	72	72
	G150/1-0300-0400-...-3.1	162	162	162	162	129	129	129	129	129	129	129	129	129	108	108	108	108	108
	G150/1-0300-0400-...-3.1	216	216	216	-	172	172	172	172	-	-	-	-	-	-	-	-	-	-

Note

Order numbers for enclosures with mounting rails and PE or PA rails	
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

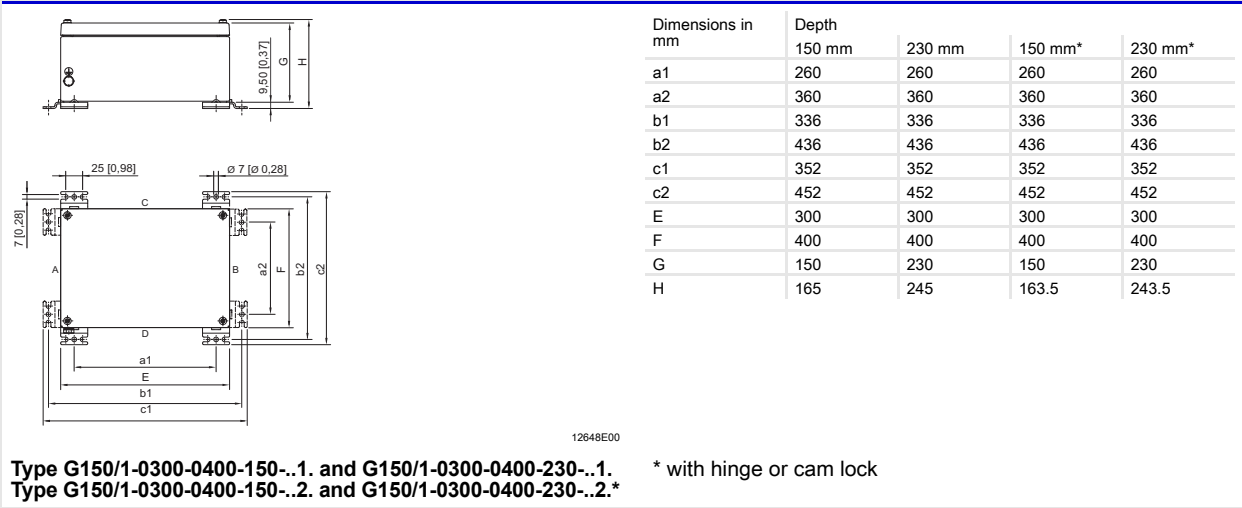
Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00	D = 150 mm	W x H	without flange				Flange		D = 230 mm	W x H	without flange				Flange	
		300 x 400	A	B	C	D	A/B	C/D		300 x 400	A	B	C	D	A/B	C/D
		M16 x 1.5	74	74	54	54	28	17		M16 x 1.5	123	123	91	91	69	a
		M20 x 1.5	48	48	34	34	18	10		M20 x 1.5	85	85	59	59	44	
		M25 x 1.5	30	30	21	21	13	7		M25 x 1.5	60	60	43	43	28	
		M32 x 1.5	22	22	15	15	9	5		M32 x 1.5	39	39	27	27	20	
		M40 x 1.5	11	11	8	8	5	3		M40 x 1.5	22	22	15	15	10	
		M50 x 1.5	7	7	5	5	3	2		M50 x 1.5	14	14	9	9	8	
		M63 x 1.5	5	5	3	3	3	2		M63 x 1.5	9	9	6	6	6	
a = on request																

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations




E3

Terminal boxes

Series G150

Version 400 x 400

Terminal box up to 35 mm²

	Max. number of terminals																				
	Wago																				
Nominal cross-section [mm ²]	2.5				4								6								10
Colour	GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal	2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2
Mounting rail placement																					
	Number of mounting rails																				
	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207
	1	78	78	78	63	63	63	63	63	63	63	63	63	52	52	52	52	52	43	43	43
	2	156	156	156	126	126	126	126	126	126	126	126	126	104	104	104	104	104	86	86	86
	3	234	234	234	189	189	189	189	189	189	189	189	189	156	156	156	156	156	129	129	129
G150/1-0400-0400-...-3.1	4	312	312	312	-	252	252	252	252	-	-	-	-	-	-	-	-	-	-	-	-

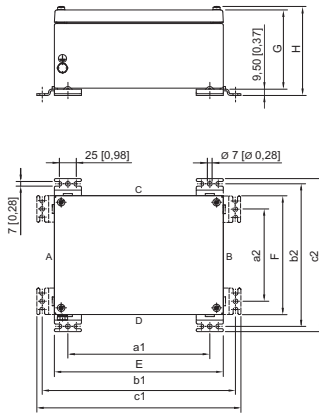
Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange			W x H	without flange				Flange		
	400 x 400	A	B	C	D	A/B	C/D		400 x 400	A	B	C	D	A/B	C/D	
D = 150 mm	M16 x 1.5	74	74	74	74	28	28	D = 230 mm	M16 x 1.5	123	123	123	123	69	69	
	M20 x 1.5	48	48	48	48	18	18		M20 x 1.5	85	85	85	85	44	44	
	M25 x 1.5	29	29	30	30	13	13		M25 x 1.5	59	59	60	60	28	28	
	M32 x 1.5	21	21	22	22	9	9		M32 x 1.5	38	38	39	39	20	20	
	M40 x 1.5	11	11	11	11	5	5		M40 x 1.5	22	22	22	22	10	10	
	M50 x 1.5	7	7	7	7	3	3		M50 x 1.5	14	14	14	14	8	8	
	M63 x 1.5	5	5	5	5	3	3		M63 x 1.5	9	9	9	9	6	6	

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	Depth			
		150 mm	230 mm	150 mm*	230 mm*
a1		360	360	360	360
a2		360	360	360	360
b1		436	436	436	436
b2		436	436	436	436
c1		452	452	452	452
c2		452	452	452	452
E		400	400	400	400
F		400	400	400	400
G		150	230	150	230
H		165	245	163.5	243.5

Type G150/1-0400-0400-150-..1. and G150/1-0400-0400-230-..1.
Type G150/1-0400-0400-150-..2. and G150/1-0400-0400-230-..2.*

* with hinge or cam lock

Terminal boxes

Series G150



Version 550 x 360 (horizontal)

Terminal box up to 35 mm²

		Max. number of terminals																							
		Wago																							
Nominal cross-section [mm ²]		2.5				4								6						10					
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE			
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2			
Mounting rail placement																									
	Number of mounting rails																								
	2001 - 1201	113	113	113	113	91	91	91	91	91	91	91	91	91	77	77	77	77	77	63	63	63			
	2001 - 1204	226	226	226	226	182	182	182	182	182	182	182	182	182	154	154	154	154	154	126	126	126			
	2001 - 1207	339	339	339	339	273	273	273	273	273	273	273	273	273	231	231	231	231	231	189	189	189			
	2001 - 1307	452	452	452	-	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2002 - 1201	91	91	91	91	91	91	91	91	91	91	91	91	91	77	77	77	77	77	63	63	63			
	2002 - 1202	182	182	182	182	182	182	182	182	182	182	182	182	182	154	154	154	154	154	126	126	126			
	2002 - 1204	273	273	273	273	273	273	273	273	273	273	273	273	273	231	231	231	231	231	189	189	189			
	2002 - 1207	364	364	364	364	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2002 - 1401	91	91	91	91	91	91	91	91	91	91	91	91	91	77	77	77	77	77	63	63	63			
	2002 - 1407	182	182	182	182	182	182	182	182	182	182	182	182	182	154	154	154	154	154	126	126	126			
	2002 - 1301	273	273	273	273	273	273	273	273	273	273	273	273	273	231	231	231	231	231	189	189	189			
	2002 - 1304	364	364	364	364	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2002 - 1307	452	452	452	-	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2004 - 1201	91	91	91	91	91	91	91	91	91	91	91	91	91	77	77	77	77	77	63	63	63			
	2004 - 1204	182	182	182	182	182	182	182	182	182	182	182	182	182	154	154	154	154	154	126	126	126			
	2004 - 1207	273	273	273	273	273	273	273	273	273	273	273	273	273	231	231	231	231	231	189	189	189			
	2004 - 1301	364	364	364	364	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2004 - 1407	452	452	452	-	364	364	364	364	-	-	-	-	-	-	-	-	-	-	-	-	-			
	2006 - 1201	91	91	91	91	91	91	91	91	91	91	91	91	91	77	77	77	77	77	63	63	63			
	2006 - 1204	182	182	182	182	182	182	182	182	182	182	182	182	182	154	154	154	154	154	126	126	126			
	2006 - 1207	273	273	273	273	273	273	273	273	273	273	273	273	273	231	231	231	231	231	189	189	189			

Note

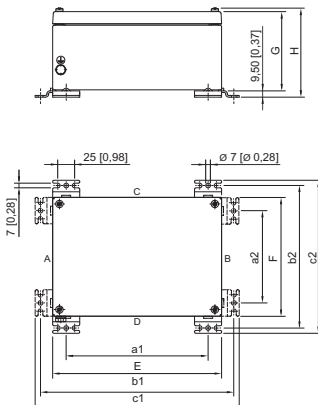
	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	230 mm

Terminal boxes equipped with terminals > 35 to 300 mm² on request

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 D = 230 mm	W x H	without flange				Flange	
	550 x 360	A	B	C	D	A/B	C/D
	M16 x 1.5	91	91	123	123	69	110
	M20 x 1.5	59	59	85	85	44	74
	M25 x 1.5	43	43	59	59	28	49
	M32 x 1.5	27	27	38	38	20	31
	M40 x 1.5	15	15	22	22	10	16
	M50 x 1.5	9	9	14	14	8	14
	M63 x 1.5	6	6	9	9	6	10

Dimensional Drawings (all dimensions in mm) - Subject to alterations

	Dimensions in mm	Depth 230 mm	230 mm*
a1	320	320	
a2	510	510	
b1	396	396	
b2	586	586	
c1	412	412	
c2	602	602	
E	360	360	
F	550	550	
G	230	230	
H	245	243.5	

Type G150/1-0550-0360-230-...1.
Type G150/1-0550-0360-230-...2.*


* with hinge or cam lock

Terminal boxes

Series G150

Version 360 x 550 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																					
		Wago																					
Nominal cross-section [mm²]		2.5				4										6					10		
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	
Mounting rail placement																							
 12958E00	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
	G150/1-0360-0550-...-3.1	1	64	64	64	64	52	52	52	52	52	52	52	52	52	43	43	43	43	43	36	36	36
	G150/1-0360-0550-...-3.1	2	128	128	128	128	104	104	104	104	104	104	104	104	104	86	86	86	86	86	72	72	72
	G150/1-0360-0550-...-3.1	3	192	192	192	192	156	156	156	156	156	156	156	156	156	129	129	129	129	129	108	108	108
	G150/1-0360-0550-...-3.1	4	256	256	256	256	208	208	208	208	208	208	208	208	208	172	172	172	172	172	144	144	144
	G150/1-0360-0550-...-3.1	5	320	320	320	320	260	260	260	260	-	-	260	260	260	215	215	215	-	-	-	-	-
	G150/1-0360-0550-...-3.1	6	384	384	384	-	312	312	312	312	-	-	-	-	-	-	-	-	-	-	-	-	-

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	D = 230 mm	W x H	without flange				Flange	
		360 x 550	A	B	C	D	A/B	C/D
		M16 x 1.5	123	123	91	91	110	69
		M20 x 1.5	85	85	59	59	74	44
		M25 x 1.5	59	59	43	43	49	28
		M32 x 1.5	38	38	27	27	31	20
		M40 x 1.5	22	22	15	15	16	10
		M50 x 1.5	14	14	9	9	14	8
		M63 x 1.5	9	9	6	6	10	6

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations

Technical drawing of a terminal box showing front and side views. The front view includes dimensions A, B, C, D, E, F, G, H, a1, a2, b1, b2, c1, c2. The side view shows dimensions 25 [0.98], 7 [0.28], and 9.50 [0.37].

Dimensions in mm	Depth
	230 mm*
a1	320
a2	510
b1	396
b2	586
c1	412
c2	602
E	360
F	550
G	230
H	243.5

Type G150/1-0360-0550-230-...2.*

12648E00

* with hinge or cam lock


E3

Terminal boxes

Series G150

Version 600 x 400 (horizontal)

Terminal box up to 35 mm²

	Max. number of terminals																				
	Wago																				
Nominal cross-section [mm ²]	2.5				4								6						10		
Colour	GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE
Number of conductors per terminal	2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2
Mounting rail placement																					
	Number of mounting rails																				
	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207
	1	125	125	125	101	101	101	101	101	101	101	101	101	85	85	85	85	85	70	70	70
	2	250	250	250	202	202	202	202	202	202	202	202	202	170	170	170	170	170	140	140	140
	3	375	375	375	303	303	303	303	303	303	303	303	303	255	255	255	255	255	210	210	210
	4	500	500	500	404	404	404	404	-	-	-	-	-	-	-	-	-	-	-	-	-

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

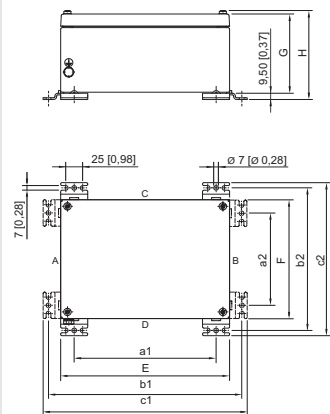
Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	W x H	without flange				Flange			W x H	without flange				Flange	
		A	B	C	D	A/B	C/D			A	B	C	D	A/B	C/D
	600 x 400														
	M16 x 1.5	74	74	117	117	28	47			123	123	190	190	69	110
	M20 x 1.5	48	48	74	74	18	31			85	85	131	131	44	74
	M25 x 1.5	29	29	46	46	13	21			59	59	94	94	28	49
	M32 x 1.5	21	21	33	33	9	15			38	38	63	63	20	31
	M40 x 1.5	11	11	18	18	5	8			22	22	36	36	10	16
	M50 x 1.5	7	7	11	11	3	5			14	14	22	22	8	14
	M63 x 1.5	5	5	7	7	3	5			9	9	14	14	6	10

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations



Dimensions in mm	Depth		
	150 mm	230 mm	230 mm*
a1	560	560	560
a2	360	360	360
b1	636	636	636
b2	436	436	436
c1	652	652	652
c2	452	452	452
E	600	600	600
F	400	400	400
G	150	230	230
H	165	245	243.5

Type G150/1-0600-0400-150-...1. and G150/1-0600-0400-230-...1.
Type G150/1-0600-0400-230-...2.*

* with hinge or cam lock


E3

Terminal boxes

Series G150

Version 400 x 600 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																						
		Wago																						
Nominal cross-section [mm²]		2.5				4								6						10				
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE		
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2		
Mounting rail placement																								
	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207		
G150/1-0400-0600-...-3.1	1	78	78	78	78	63	63	63	63	63	63	63	63	63	52	52	52	52	52	43	43	43		
G150/1-0400-0600-...-3.1	2	156	156	156	156	126	126	126	126	126	126	126	126	126	104	104	104	104	104	86	86	86		
G150/1-0400-0600-...-3.1	3	234	234	234	234	189	189	189	189	189	189	189	189	189	156	156	156	156	156	129	129	129		
G150/1-0400-0600-...-3.1	4	312	312	312	312	252	252	252	252	252	252	252	252	252	208	208	208	208	208	172	172	172		
G150/1-0400-0600-...-3.1	5	390	390	390	390	315	315	315	315	-	-	315	315	315	260	260	260	260	-	215	215	215		
G150/1-0400-0600-...-3.1	6	468	468	468	-	378	378	378	378	-	-	-	-	-	-	-	-	-	-	-	-	-		

Note

		Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information		Terminal block: Number and type
Cable entry		Number, type and installation side in enclosure
Flanges		can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals		Phoenix; Weidmüller available on request
Available enclosure depths		150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request		

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

		W x H								W x H							
		without flange				Flange				without flange				Flange			
		A	B	C	D	A/B	C/D			A	B	C	D	A/B	C/D		
D = 150 mm	05864E00	400 x 600								400 x 600							
		M16 x 1.5	117	117	74	74	47	28		M16 x 1.5	190	190	123	123	110	69	
		M20 x 1.5	74	74	48	48	31	18		M20 x 1.5	131	131	85	85	74	44	
		M25 x 1.5	46	46	29	29	21	13		M25 x 1.5	94	94	59	59	49	28	
		M32 x 1.5	33	33	21	21	15	9		M32 x 1.5	63	63	38	38	31	20	
		M40 x 1.5	18	18	11	11	8	5		M40 x 1.5	36	36	22	22	16	10	
		M50 x 1.5	11	11	7	7	5	3		M50 x 1.5	22	22	14	14	14	8	
D = 230 mm		M63 x 1.5	7	7	5	5	5	3		M63 x 1.5	14	14	9	9	10	6	

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations

12648E00

Dimensions in mm	Depth			
	150 mm	230 mm	150 mm*	230 mm*
a1	360	360	360	360
a2	560	560	560	560
b1	436	436	436	436
b2	636	636	636	636
c1	452	452	452	452
c2	652	652	652	652
E	400	400	400	400
F	600	600	600	600
G	150	230	150	230
H	165	245	163.5	243.5

Type G150/1-0400-0600-150-...1. and G150/1-0400-0600-230-...1.
Type G150/1-0400-0600-150-...2. and G150/1-0400-0600-230-...2.*

* with hinge or cam lock


E3

Terminal boxes

Series G150

Version 600 x 600

Terminal box up to 35 mm²

		Max. number of terminals																					
		Wago																					
Nominal cross-section [mm²]		2.5				4									6					10			
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	
Mounting rail placement																							
	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	
	G150/1-0600-0600-...-3.1	1	125	125	125	101	101	101	101	101	101	101	101	101	85	85	85	85	85	70	70	70	
	G150/1-0600-0600-...-3.1	2	250	250	250	202	202	202	202	202	202	202	202	202	170	170	170	170	170	140	140	140	
	G150/1-0600-0600-...-3.1	3	375	375	375	303	303	303	303	303	303	303	303	303	255	255	255	255	255	210	210	210	
	G150/1-0600-0600-...-3.1	4	500	500	500	500	404	404	404	404	404	404	404	404	340	340	340	340	340	280	280	280	
	G150/1-0600-0600-...-3.1	5	625	625	625	625	505	505	505	505	-	-	505	505	505	425	425	425	425	425	350	350	350
	G150/1-0600-0600-...-3.1	6	750	750	750	-	606	606	606	606	-	-	-	-	-	-	-	-	-	-	-	-	-

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 230 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

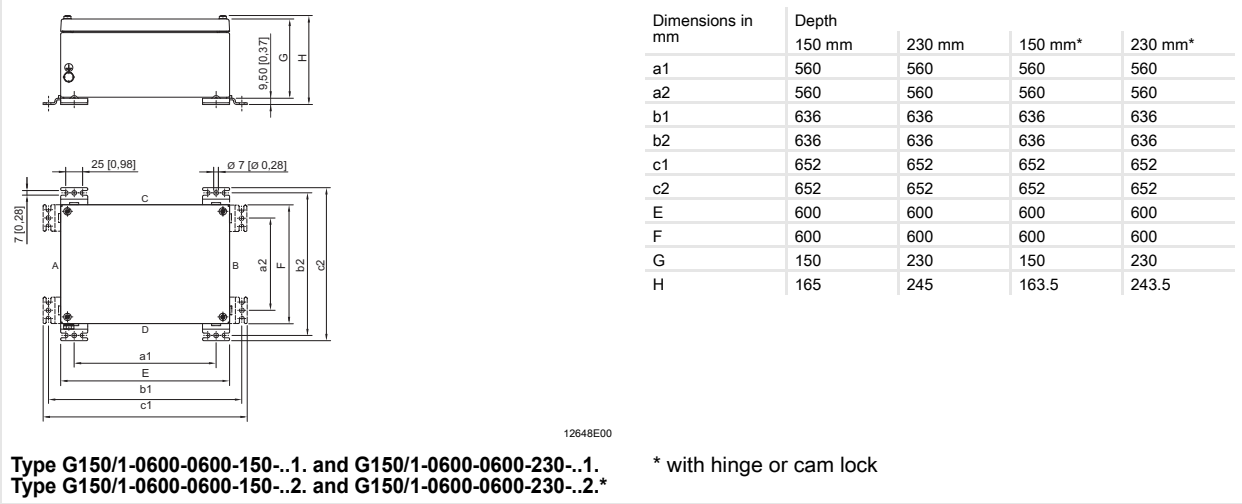
Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

	D = 150 mm	W x H	without flange				Flange		D = 230 mm	W x H	without flange				Flange	
		600 x 600	A	B	C	D	A/B	C/D		600 x 600	A	B	C	D	A/B	C/D
		M16 x 1.5	116	116	117	117				M16 x 1.5	187	187	190	190		
		M20 x 1.5	73	73	74	74				M20 x 1.5	130	130	131	131		
		M25 x 1.5	45	45	46	46	a	a		M25 x 1.5	91	91	94	94	a	a
		M32 x 1.5	33	33	33	33				M32 x 1.5	63	63	63	63		
		M40 x 1.5	18	18	18	18				M40 x 1.5	34	34	36	36		
		M50 x 1.5	11	11	11	11				M50 x 1.5	22	22	22	22		
		M63 x 1.5	7	7	7	7				M63 x 1.5	14	14	14	14		

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations




E3

Terminal boxes

Series G150

Version 727 x 360 (horizontal)

Terminal box up to 35 mm²

	Max. number of terminals																							
	Wago																							
Nominal cross-section [mm ²]	2.5				4				6				10				16				25			
Colour	GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE
Number of conductors per terminal	2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2	2	2	2
Mounting rail placement																								
	Number of mounting rails																							
	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207	2006 - 1201	2006 - 1204	2006 - 1207
	1	142	142	142	114	114	114	114	114	114	114	114	114	96	96	96	96	96	79	79	79	79	79	79
	2	284	284	284	228	228	228	228	228	228	228	228	228	192	192	192	192	192	158	158	158	158	158	158
	3	426	426	426	342	342	342	342	-	-	342	342	342	288	288	288	288	-	237	237	237	237	237	237
	4	568	568	568	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	91 mm; 150 mm; 190 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

05864E00

D = 91 mm

W x H	without flange				Flange
727 x 360	A	B	C	D	a
M16 x 1.5	27	27	48	48	
M20 x 1.5	20	20	36	36	
M25 x 1.5	10	10	30	30	
M32 x 1.5	7	7	14	14	
M40 x 1.5	5	5	12	12	
M50 x 1.5	-	-	8	8	
M63 x 1.5	-	-	-	-	

D = 150 mm

W x H	without flange				Flange
727 x 360	A	B	C	D	a
M16 x 1.5	65	65	117	117	
M20 x 1.5	42	42	74	74	
M25 x 1.5	26	26	46	46	
M32 x 1.5	18	18	33	33	
M40 x 1.5	10	10	18	18	
M50 x 1.5	6	6	11	11	
M63 x 1.5	4	4	7	7	

D = 190 mm

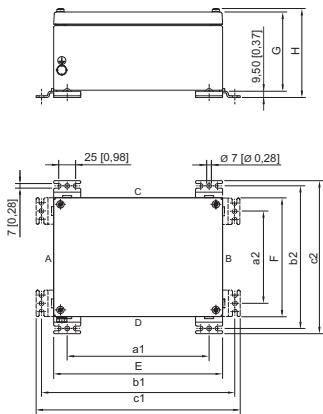
W x H	without flange				Flange
727 x 360	A	B	C	D	a
M16 x 1.5	68	68	140	140	
M20 x 1.5	51	51	100	100	
M25 x 1.5	34	34	70	70	
M32 x 1.5	19	19	32	32	
M40 x 1.5	15	15	22	22	
M50 x 1.5	9	9	20	20	
M63 x 1.5	6	6	15	15	

a = on request

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations



Dimensions in mm	Depth		
	91 mm	150 mm	190 mm
a1	687	687	687
a2	320	320	320
b1	763	763	763
b2	398	398	398
c1	779	779	779
c2	412	412	412
E	727	727	727
F	360	360	360
G	91	150	190
H	106	165	205

12648E00

Type G150/-0727-0360-091-..1.
Type G150/-0727-0360-150-..1.
Type G150/-0727-0360-190-..1.


E3

Terminal boxes

Series G150

Version 360 x 727 (vertical)

Terminal box up to 35 mm²

		Max. number of terminals																						
		Wago																						
Nominal cross-section [mm²]		2.5				4								6						10				
Colour		GY	BU	PE	PE	GY	OG	BU	PE	GY	PE	GY	BU	PE	GY	BU	PE	GY	PE	GY	BU	PE		
Number of conductors per terminal		2	2	2	3	2	2	2	2	4	4	3	3	3	2	2	2	3	4	2	2	2		
Mounting rail placement																								
	Number of mounting rails	2001 - 1201	2001 - 1204	2001 - 1207	2001 - 1307	2002 - 1201	2002 - 1202	2002 - 1204	2002 - 1207	2002 - 1401	2002 - 1407	2002 - 1301	2002 - 1304	2002 - 1307	2004 - 1201	2004 - 1204	2004 - 1207	2004 - 1301	2004 - 1407	2006 - 1201	2006 - 1204	2006 - 1207		
G150/1-0360-0727-...-3.1	1	64	64	64	64	52	52	52	52	52	52	52	52	52	43	43	43	43	43	36	36	36		
G150/1-0360-0727-...-3.1	2	128	128	128	128	104	104	104	104	104	104	104	104	104	86	86	86	86	86	72	72	72		
G150/1-0360-0727-...-3.1	3	192	192	192	192	156	156	156	156	156	156	156	156	156	129	129	129	129	129	108	108	108		
G150/1-0360-0727-...-3.1	4	256	256	256	256	208	208	208	208	208	208	208	208	208	172	172	172	172	172	144	144	144		
G150/1-0360-0727-...-3.1	5	320	320	320	320	260	260	260	260	260	260	260	260	260	215	215	215	215	215	180	180	180		
G150/1-0360-0727-...-3.1	6	384	384	384	384	312	312	312	312	312	312	312	312	312	258	258	258	258	-	216	216	216		
G150/1-0360-0727-...-3.1	7	448	448	448	448	364	364	364	364	-	-	-	-	-	301	301	301	-	-	-	-	-		

Note

	Order numbers for enclosures with mounting rails and PE or PA rails
Plain text information	Terminal block: Number and type
Cable entry	Number, type and installation side in enclosure
Flanges	can be installed acc. to order; please indicate the enclosure side on which they are to be equipped
Terminals	Phoenix; Weidmüller available on request
Available enclosure depths	150 mm; 190 mm
Terminal boxes equipped with terminals > 35 to 300 mm ² on request	

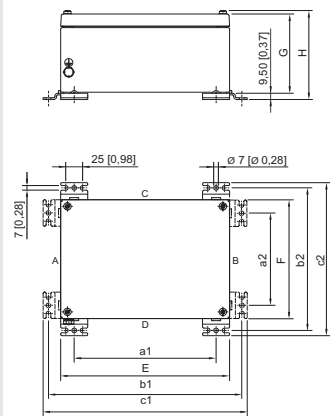
Table showing the max. number of possible entries of the enclosure using cable glands from series 8161

 05864E00	D = 150 mm	W x H	without flange				Flange		D = 190 mm	W x H	without flange				Flange	
		360 x 727	A	B	C	D	A/B	C/D		360 x 727	A	B	C	D	A/B	C/D
		M16 x 1.5	117	117	65	65	47	28		M16 x 1.5	a	a	67	67	a	40
		M20 x 1.5	74	74	42	42	31	18		M20 x 1.5			42	42		28
		M25 x 1.5	46	46	26	26	21	13		M25 x 1.5			26	26		20
		M32 x 1.5	33	33	18	18	15	9		M32 x 1.5			19	19		12
		M40 x 1.5	18	18	10	10	8	5		M40 x 1.5			10	10		8
		M50 x 1.5	11	11	6	6	5	3		M50 x 1.5			6	6		6
		M63 x 1.5	7	7	4	4	5	3		M63 x 1.5			4	4		3
		a = on request														

Terminal boxes
Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations



Dimensions in mm	Depth	
	150 mm*	190 mm*
a1	320	320
a2	687	687
b1	398	398
b2	763	763
c1	412	412
c2	779	779
E	360	360
F	727	727
G	150	190
H	163.5	203.5

Type G150/1-0360-0727-150-...2. and
G150/1-0360-0727-190-...2.*

12648E00

* with hinge or cam lock

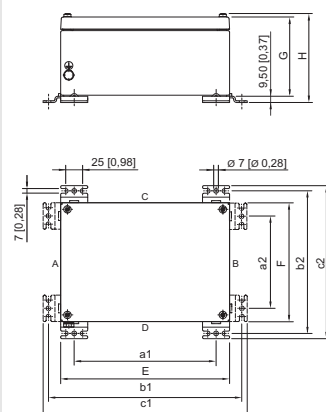
E3

Terminal boxes

Series G150



Dimensional Drawings (all dimensions in mm) - Subject to alterations



Dimensions in mm	Depth	
	230 mm	230 mm*
a1	747	747
a2	440	440
b1	823	823
b2	516	516
c1	839	839
c2	532	532
E	787	787
F	480	480
G	230	230
H	245	243.5

12648E00

Type G150/1-0787-0480-230-...1.
Type G150/1-0787-0480-230-...2.*

* with hinge or cam lock

Technical Data

Electrical data

Rated operational voltage	max. 1100 V depending on the terminal type and the components used
Rated operational current	max. 630 A depending on the terminal type and the components used

Ambient conditions

Ambient temperature	depending on the terminal type and the components used
---------------------	--

Mechanical data

Degree of protection	IP66 acc. to EN IEC 60529
Material	
Enclosure	stainless steel V1.4301 (AISI 304) respectively 1.4404 (AISI 316L) brush finished
Seal	Silicone, foamed
Mounting plate	sheet steel, galvanized
Cover lock	- with captive M6 stainless steel combo head screws or - with hinges / cam locks Double-bit key no. 5 for cam lock included in delivery
Flange	
Standard version	without flange
Special version	with flange
Wall thickness	
Enclosure cover	min. 2 mm
Mounting plate	3 mm
Cover screws tightening torque	4.5 Nm
Protective conductor connection	M8 blind rivet nut (1x): at the outside of the enclosure M8 rivet nut (1x): on mounting plate M6 bolt (1x): additionally on enclosures with cover hinges
Rated cross-section	max. 300 mm ² depending on the terminal type and the components used

Note


please refer to the manufacturer's terminal data, e.g. the tightening torque

E3

Terminal boxes

Series G150

Accessories and spare parts

Designation	Figure	Order number	Depth	Material thickness [mm]	Material			
					Side C/D		Side A/B	
					1.4301	1.4404	1.4301	1.4404
Flange		G150/1-0176-0116-...-3.1	91	-	-	-	-	-
		G150/1-0176-0176-...-3.1	91	-	a	a	a	a
		G150/1-0236-0176-...-3.1	91	3	202965	202966	a	a
				5	202967	202968	a	a
		G150/1-0300-0200-...-3.1	150	3	a	a	202885	202886
				5	a	a	202887	202888
		G150/1-0360-0176-...-3.1	91	3	202961	202962	a	a
				5	202963	202964	a	a
			150	3	202892	202893	202885	202886
				5	202894	202895	202887	202888
		G150/1-0360-0360-...-3.1	91	3	202961	202962	202961	202962
				5	202963	202964	202963	202964
			150	3	202892	202893	202892	202893
				5	202894	202895	202894	202895
			190	3	a	a	a	a
				5	a	a	a	a
			G150/1-0400-0300-...-3.1	150	202892	202893	a	a
					202894	202895	a	a
			230	3	202896	202897	a	a
				5	202898	202899	a	a
		G150/1-0400-0400-...-3.1	150	3	202892	202893	202892	202893
				5	202894	202895	202894	202895
			230	3	202896	202897	202896	202897
				5	202898	202899	202898	202899
		G150/1-0550-0360-...-3.1	230	3	202900	202901	202896	202897
				5	202902	202903	202898	202899
		G150/1-0600-0400-...-3.1	230	3	202900	202901	202896	202897
				5	202902	202903	202898	202899
		G150/1-0727-0360-...-3.1	150	3	a	a	202892	202893
				5	a	a	202894	202895
		G150/1-0600-0600-...-3.1	150	3	202904	202905	202904	202905
				5	202906	202907	202906	202907
			230	3	202900	202901	202900	202901
				5	202902	202903	202902	202903
		G150/1-0787-0480-...-3.1	230	3	202953	202954	202896	202897
				5	202955	202956	202898	202899

a = on request

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.