



Monolithic pilot light, Easy Harmony XA2, plastic, blue, 22mm, integral LED, screw clamp terminals, 220...230V AC, anti interference

XA2EVM6LC

#### Main

Range of product	Easy Harmony XA2	
Product or component type	Monolithic pilot light	
Device short name	XA2	
Mounting diameter	22.5 mm	
Shape of signaling unit head	Round	
Cap/operator or lens colour	Blue	
Light source	LED	
Bulb base	Integral LED	
[Us] rated supply voltage	220230 V AC 50/60 Hz	

# Complementary

Terminals description ISO n°1	(X1-X2)PL	
Device mounting	Fixing hole 22.3 +0.4/0 conforming to IEC 60947-5-1	
Fixing center	>= 30 x 40 mm (support panel) metal - thickness: 16 mm >= 30 x 40 mm (support panel) plastic - thickness: 26 mm	
Fixing mode	Fixing nut beneath head recommended torque: 2.2 N.m (+/- 0.2 N.m)	
Marking	CE CCC	
[Us] rated supply voltage	220230 V	
Connections - terminals	Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to IEC 60947-1 Screw clamp terminals, 1 x 0.51 x 2.5 mm² without cable end conforming to IEC 60947-1	
Shape of screw head	Cross compatible with Philips No 2 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver	
[Ui] rated insulation voltage	oltage 400 V (pollution degree 3) conforming to IEC 60947-1	
[Uimp] rated impulse withstand voltage	d impulse withstand 6 kV conforming to IEC 60947-1	
Signalling type	Steady	
Supply voltage limits	0.81.2 V AC	
Current consumption	<= 20 mA	
Service life	40000 h at rated voltage and 25 °C	
Height	29 mm	
Width	29 mm	

Depth	53 mm
Net weight	0.02 kg

# **Environment**

Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-2570 °C	
Overvoltage category	Class I conforming to IEC 536	
IP degree of protection	IP65 conforming to IEC 60529	
IK degree of protection	IK05	
Standards	IEC 60947-1 GB 14048.1 IEC 60947-5-1 GB 14048.5 IEC 60529 IEC 50102	
Product certifications	CE CCC	
Vibration resistance	sistance 5 gn (f= 12500 Hz) conforming to IEC 60068-2-6	
Shock resistance	ck resistance 30 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

# **Packing Units**

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	2.900 cm	
Package 1 Width	2.900 cm	
Package 1 Length	5.300 cm	
Package 1 Weight 22.000 g		
Unit Type of Package 2 BB1		
lumber of Units in Package 2 10		
Package 2 Height 8.000 cm		
ackage 2 Width 2.200 cm		
Package 2 Length	2.950 cm	
Package 2 Weight	216.000 g	
Unit Type of Package 3	S02	
Number of Units in Package 3	160	
Package 3 Height	15.000 cm	
Package 3 Width	30.000 cm	
Package 3 Length	40.000 cm	
Package 3 Weight	5.800 kg	



Green Premium<sup>TM</sup> label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO2 products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance

<b>Ø</b>	Reach Free Of Svhc	
<b>Ø</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

## XA2EVM6LC

#### **Dimensions Drawings**

#### **Dimensions**

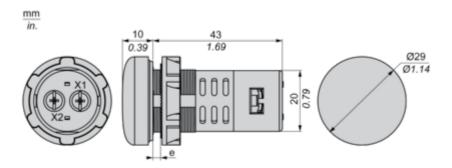

e: Calmping thickness:1 to 6 mm/0.04 to 0.24 in.


## **Product datasheet**

### XA2EVM6LC

### Mounting and Clearance

Panel Cut-Out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


#### **Connection by Screw Clamp Terminals**



- (1) Diameter on finished panel or support
- (2) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

Connections and Schema

## Wiring Diagram




(1) LED

## XA2EVM6LC


## **Technical Illustration**

#### **Dimensions**

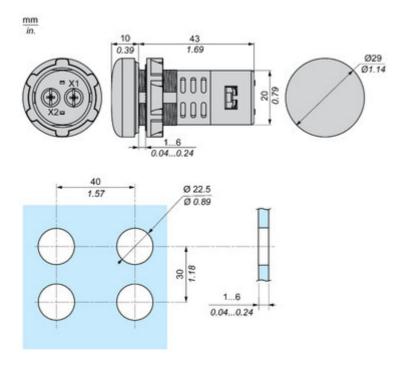

**Technical Illustration** 

Wiring diagram



Offer Marketing Illustration

#### **Product benefits / Features**

# **Technical Benefits**

Easy Harmony XA2



#### Offer Marketing Illustration

#### Product benefits / Features



Image of product / Alternate images

**Alternative** 















Contact: +971507924960

Email: sales@industrytechstore.com

