



User's Manual



Features

- Ultra slim design with 105mm(6SU) width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W
- Isolation class II
- DC output voltage adjustable
- Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category III
- LED indicator for power on
- 3 years warranty

Description

HDR-150 is an economical ultra slim 150W DIN rail power supply series, adapt to be installed on TS-35/7.5 or TS-35/15 mounting rails. The body is designed 105mm(6SU) in width, which allows space saving inside the cabinets. The entire series adopts the full range AC input from 85VAC to 264VAC(277VAC operational) and conforms to BS EN/EN61000-3-2, the norm the European Union regulates for harmonic current.

HDR-150 is designed with plastic housing that it can effectively prevent user from electric hazards. With working efficiency up to 90.5%, the entire series can operate at the ambient temperature between -30°C and 70°C under air convection. The complete protection functions and relevant certificates for home automations and industrial control apparatus (IEC62368-1, UL62368-1, UL61010, BS EN/EN61558-2-16) make HDR-150 a very competitive power supply solution for household and industrial applications.

Model Encoding

HDR - 150 - 12

Output voltage

Rated wattage

Series name

Applications

- Household control system
- Building automation
- Industrial control system
- Factory automation
- Electro-mechanical apparatus


GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


SPECIFICATION

MODEL			HDR-150-12	HDR-150-15	HDR-150-24	HDR-150-48	
OUTPUT	DC VOLTAGE		12V	15V	24V	48V	
	RATED CURRENT	115VAC	10.2A	8.55A	5.31A	2.72A	
		230VAC	11.3A	9.5A	6.25A	3.2A	
	RATED POWER	115VAC	122.4W	128.3W	127.4W	130.6W	
		230VAC	135.6W	142.5W	150W	153.6W	
	RIPPLE & NOISE (max.) <small>Note.2</small>		100mVp-p	120mVp-p	150mVp-p	200mVp-p	
	VOLTAGE ADJ. RANGE		10.8~ 13.8V	13.5 ~ 18V	21.6 ~ 29V	43.2 ~ 55.2V	
	VOLTAGE TOLERANCE <small>Note.3</small>		±2.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	
	LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	
SETUP, RISE TIME		500ms, 60ms/230VAC 500ms, 60ms/115VAC at full load					
HOLD UP TIME (Typ.)		30ms/230VAC 12ms/115VAC at full load					
INPUT	VOLTAGE RANGE		85 ~ 264VAC (277VAC operational) 120 ~ 370VDC (390VDC operational)				
	FREQUENCY RANGE		47 ~ 63Hz				
	EFFICIENCY (Typ.)		89%	89.5%	90.5%	90.5%	
	AC CURRENT (Typ.)		3A/115VAC 1.6A/230VAC				
	INRUSH CURRENT (Typ.)		COLD START 35A/115VAC 70A/230VAC				
PROTECTION	OVERLOAD		105 ~ 135% rated output power Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed Constant current limiting within 50% ~100% rated output voltage, recovers automatically after fault condition is removed				
	OVER VOLTAGE		14.2 ~ 16.2V	18.8 ~ 22.5V	30 ~ 36V	56.5 ~ 64.8V	
			Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.		-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY		20 ~ 90% RH non-condensing				
	STORAGE TEMP., HUMIDITY		-40 ~ +85°C, 10 ~ 95% RH non-condensing				
	TEMP. COEFFICIENT		±0.03%/°C (0 ~ 45°C) RH non-condensing				
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6				
	OPERATING ALTITUDE		2000 meters (Note 4)				
	OVER VOLTAGE CATEGORY		III ; According to EN62368,EN61558, EN50178,EN60664-1, EN62477-1 ; altitude up to 2000 meters				
	SAFETY & EMC <small>(Note.7)</small>	SAFETY STANDARDS		IEC62368-1, UL62368-1, UL61010, TUV BS EN/EN61558-2-16, BS EN/EN61558-1, EAC TP TC 004 approved; Design refer to BS EN/EN50178, TUV BS EN/EN62368-1			
WITHSTAND VOLTAGE		I/P-O/P:4KVAC					
ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH					
EMC EMISSION		Parameter	Standard		Test Level / Note		
		Conducted	BS EN/EN55032(CISPR32)		Class B		
		Radiated	BS EN/EN55032(CISPR32)		Class B (note 5)		
		Harmonic Current (Note 6)	BS EN/EN61000-3-2		Class A		
		Voltage Flicker	BS EN/EN61000-3-3		-----		
EMC IMMUNITY				BS EN/EN55024, BS EN/EN61000-6-2			
		Parameter	Standard		Test Level /Note		
		ESD	BS EN/EN61000-4-2		Level 3, 8KV air; Level 2, 4KV contact, criteria A		
		Radiated Susceptibility	BS EN/EN61000-4-3		Level 3, criteria A		
		EFT/Burest	BS EN/EN61000-4-4		Level 3, criteria A		
		Surge	BS EN/EN61000-4-5		Level 4,2KV/L-N, criteria A		
		Conducted	BS EN/EN61000-4-6		Level 3, criteria A		
	Magnetic Field	BS EN/EN61000-4-8		Level 4, criteria A			
	Voltage Dips and interruptions	BS EN/EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	MTBF		3046.3K hrs min. Telcordia SR-332 (Bellcore) ; 535.9K hrs min. MIL-HDBK-217F (25°C)				
	DIMENSION		105*90*54.5mm (W*H*D)				
	PACKING		0.31Kg; 32pcs/11Kg/1.0CUFT				


Block Diagram

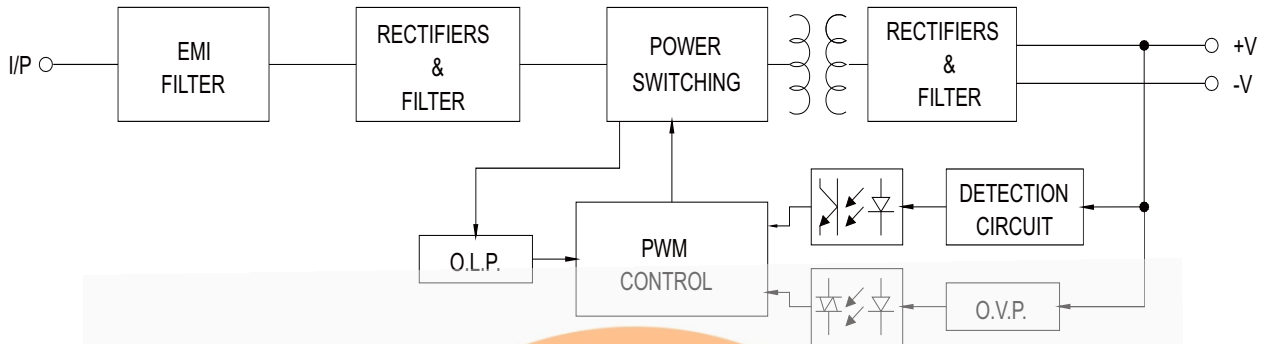

Derating Curve VS Ambient Temperature

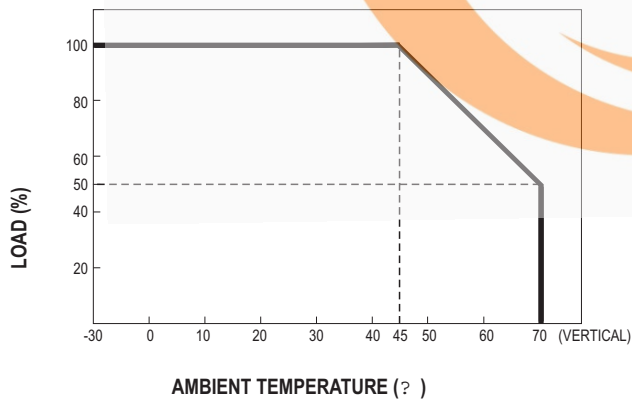


Output Derating VS Input Voltage

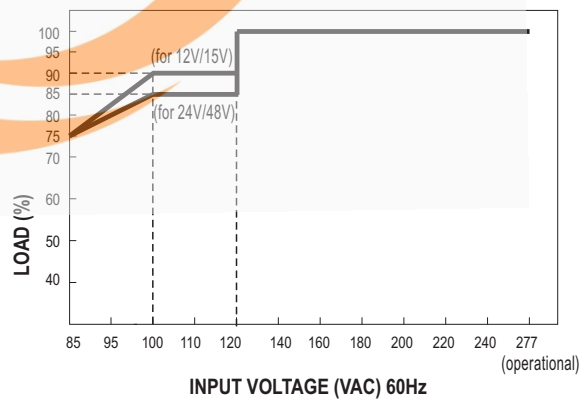

Mechanical Specification

(Unit: mm , tolerance $\pm 0.5\text{mm}$)

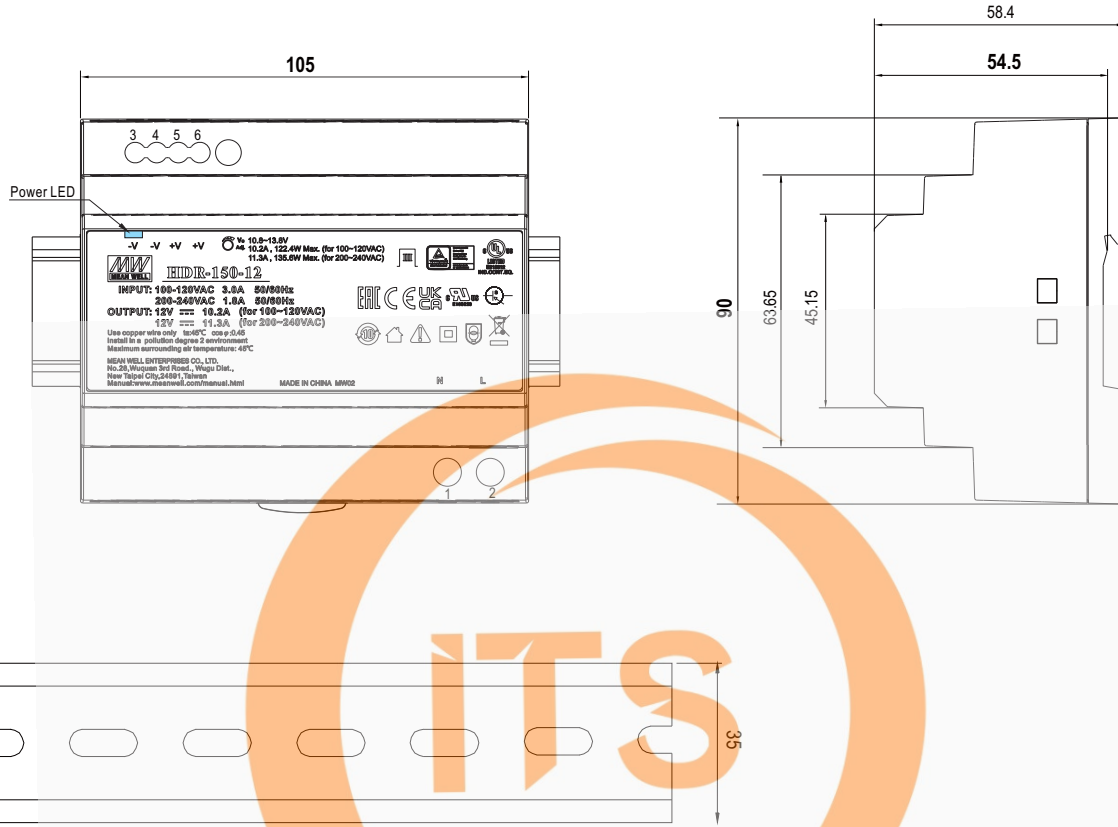

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/N	3,4	-V
2	AC/L	5,6	+V

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>